


RX³

ESSENTIAL PROTECTION

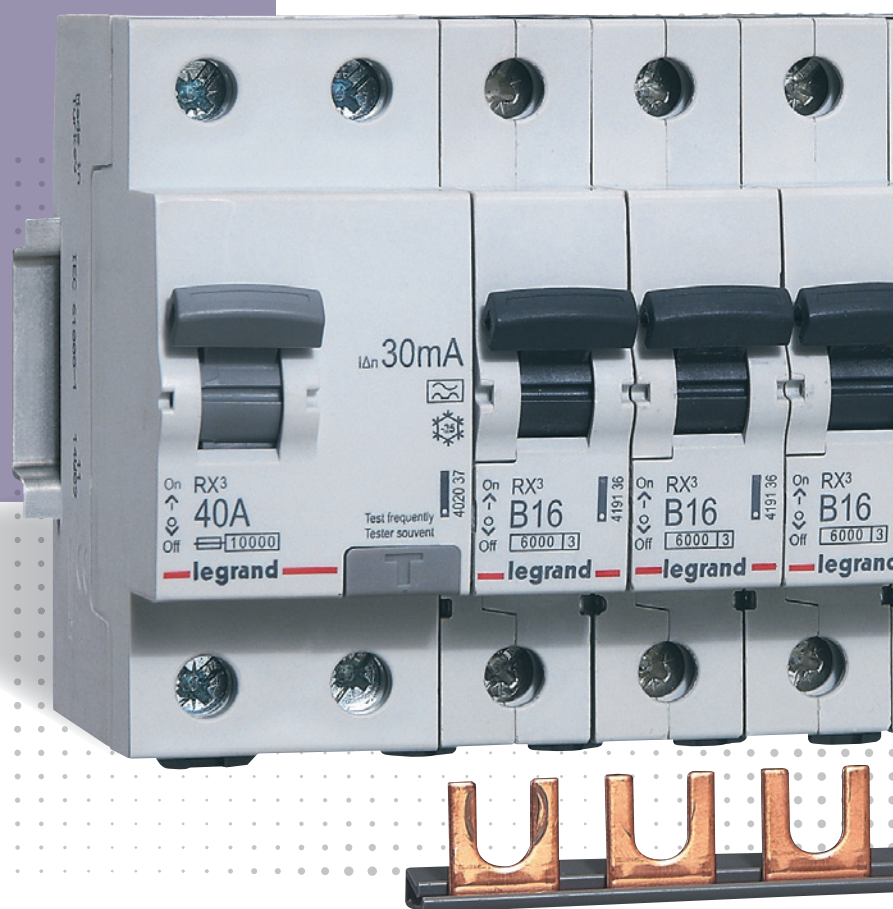

--> CATALOGUE PAGES INSIDE

THE **GLOBAL SPECIALIST**
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand**[®]

NEW RX³ RANGE ESSENTIAL PROTECTION

The new RX³ range of RCCBs and MCBs provides a response to the essential requirements on residential or small business sites, protecting against short-circuits, overloads and residual current faults.



RCCBs




THE BREADTH OF THE
RANGE COVERS
THE ESSENTIAL
REQUIREMENTS OF SITES:
2 CURVES, 1 BREAKING
CAPACITY AND RESIDUAL
CURRENT PROTECTION

- $I_n = 25$ to 80 A
- 2P and 4P
- Sensitivity:
AC type 30/100/300 mA - A type 30 mA
- Conform to standard IEC 61008-1



IDEAL FOR BUILDINGS IN
THE RESIDENTIAL AND
SMALL BUSINESS SECTORS
(OFFICES, SHOPS, ETC.)

THERMAL-MAGNETIC CIRCUIT BREAKERS

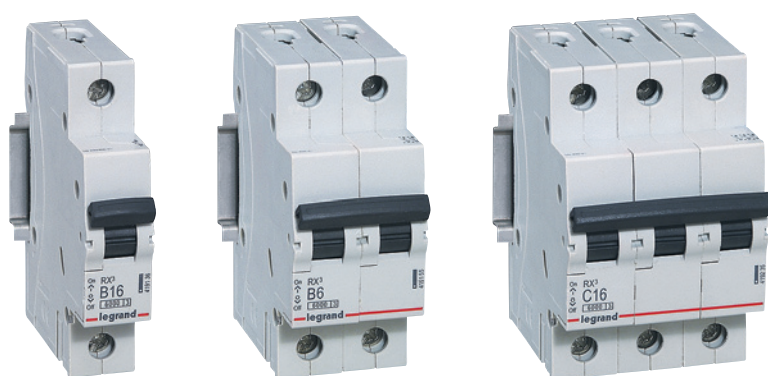


- $I_n = 6$ to 63 A
- 1P/2P/3P
- Breaking capacity 6000 at $230/400$ V~
- Breaking capacity 10000 at $127/220$ V~
- B and C curve
- Conform to standard IEC 60898-1

NEW RX³ RANGE

SAFE, RELIABLE AND EASY TO INSTALL

SAFE, EASY WIRING:

- IP2X insulated terminals
- Large capacity terminals 35 mm²
- Rising clamp terminals
- Compatible with Phillips or flat screwdriver

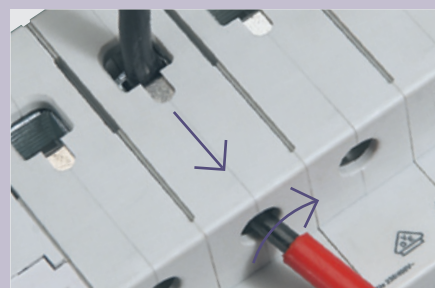

QUICK IDENTIFICATION OF THE FUNCTIONS

- 2 handle colours:
- Black for circuit breakers
 - Grey for RCCBs


SIMPLE, VISIBLE MARKING

- Easy to use, visible marking area whatever the position of the handle
- Clear, simple, indelible marking for easy identification of the product

BISTABLE CLAMPS:


- Easy positioning or removal of the product on its DIN rail



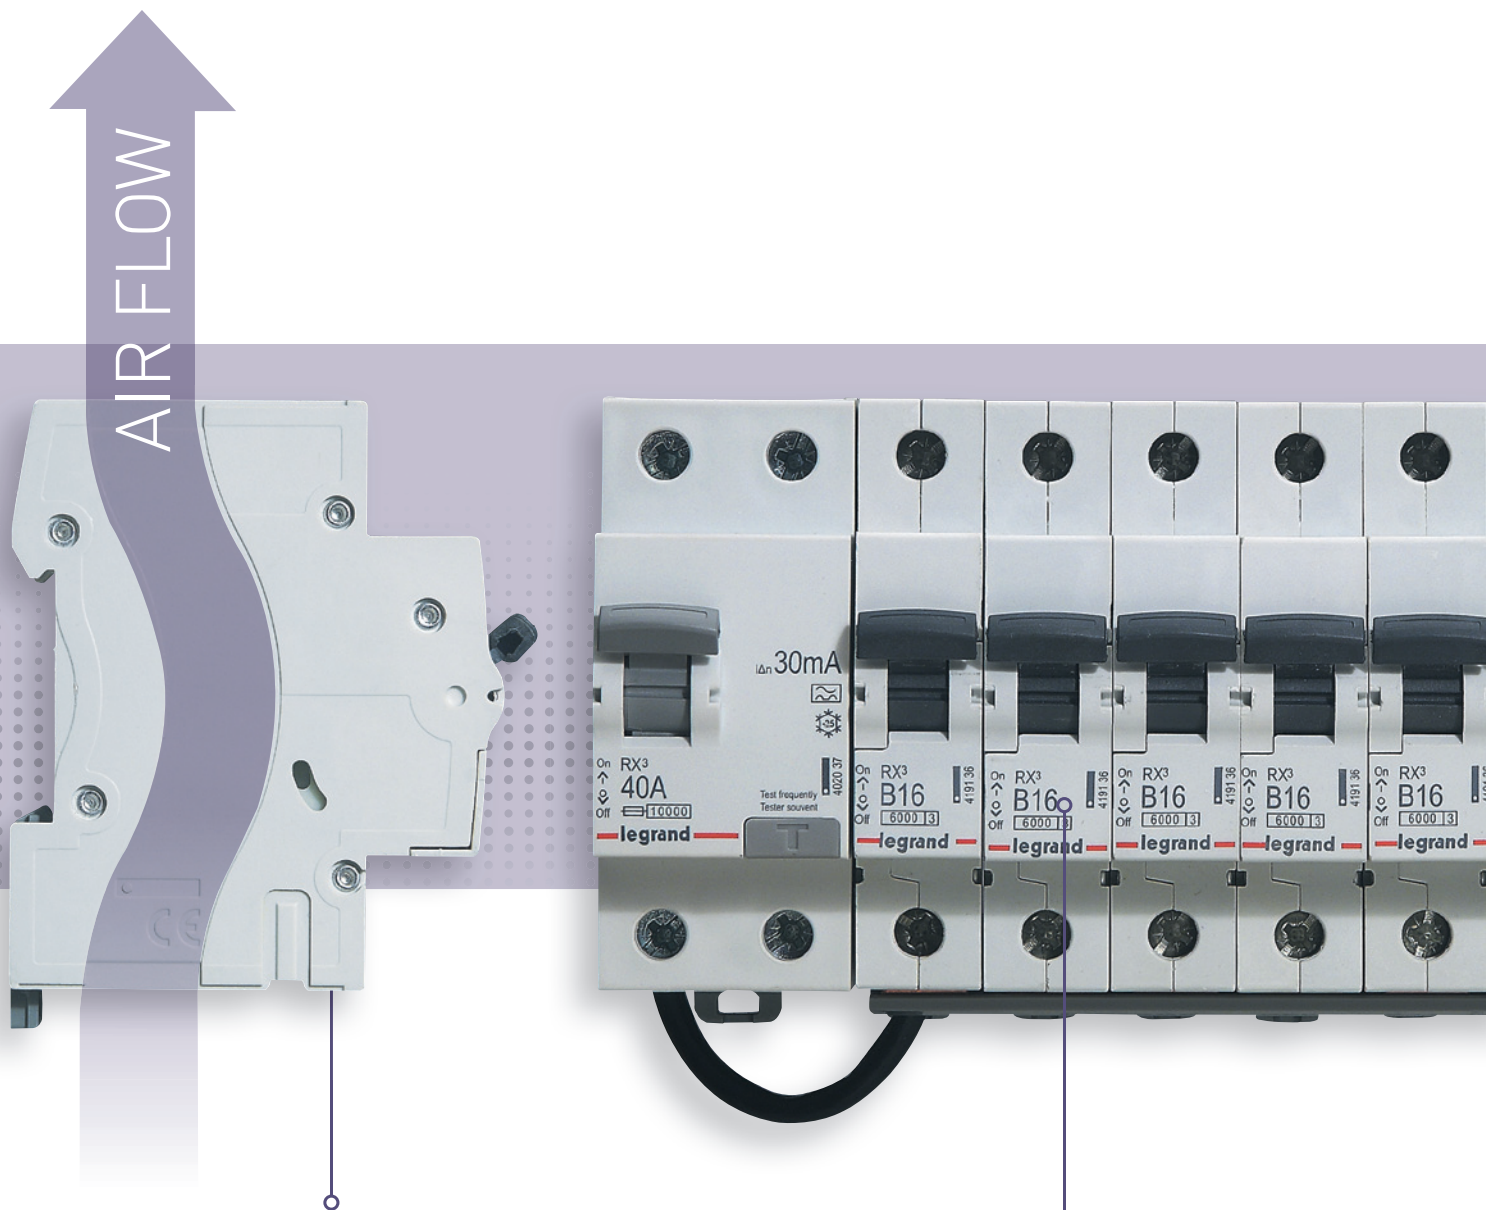

COPYTRACER - THE FIGHT AGAINST COUNTERFEITING

A unique serial number is printed on our circuit breakers which allows customers to check the authenticity of the product using the online Copytracer facility at www.legrand-copytracer.com



AN ATTRACTIVE, WELL THOUGHT-OUT DESIGN FOR SAFETY AND COMFORT

- A well-designed shape and careful choice of material for the devices enables air to circulate, limiting any temperature rise between each circuit breaker
- Neat, attractive finish for greater ease of use

RX³ THE GUARANTEE OF A SAFE, RELIABLE RANGE

Long-lasting electrical endurance

10 000 operations

Use under extreme conditions

-25°C to +70°C

Optimum protection in the event of short-circuits

Limitation classe 3

Quality guaranteed by international approvals



MCBs RX³ 6000

thermal magnetic MCBs from 6 A to 63 A - B curve



Conform to IEC 60898-1
Do not accept auxiliaries, and RCD add-on modules
Compatible with prong-type and fork type supply busbars
Breaking capacity:
6000 - IEC 60898-1 - 230/400 V \sim
6 kA - IEC 60947-2 - 230/400 V \sim
10000 - IEC 60898-1 - 127/220 V \sim
10 kA - IEC 60947-2 - 127/220 V \sim

Pack	Cat.Nos	Single pole 230/400 V \sim	
	B curve	Nominal rating In (A)	Number of modules
12	4 191 33	6	1
12	4 191 34	10	1
12	4 191 35	13	1
12	4 191 36	16	1
12	4 191 37	20	1
12	4 191 38	25	1
12	4 191 39	32	1
12	4 191 40	40	1
12	4 191 41	50	1
12	4 191 42	63	1

Pack	Cat.Nos	2-pole 230/400 V \sim	
	B curve	Nominal rating In (A)	Number of modules
6	4 191 55	6	2
6	4 191 56	10	2
6	4 191 57	13	2
6	4 191 58	16	2
6	4 191 59	20	2
6	4 191 60	25	2
6	4 191 61	32	2
6	4 191 62	40	2
6	4 191 63	50	2
6	4 191 64	63	2

Pack	Cat.Nos	3-pole 400 V \sim	
	B curve	Nominal rating In (A)	Number of modules
4	4 191 66	6	3
4	4 191 67	10	3
4	4 191 68	13	3
4	4 191 69	16	3
4	4 191 70	20	3
4	4 191 71	25	3
4	4 191 72	32	3
4	4 191 73	40	3
4	4 191 74	50	3
4	4 191 75	63	3

MCBs RX³ 6000

thermal magnetic MCBs from 6 A to 63 A - C curve



Conform to IEC 60898-1
Do not accept auxiliaries, and RCD add-on modules
Compatible with prong-type and fork type supply busbars
Breaking capacity:
6000 - IEC 60898-1 - 230/400 V \sim
6 kA - IEC 60947-2 - 230/400 V \sim
10000 - IEC 60898-1 - 127/220 V \sim
10 kA - IEC 60947-2 - 127/220 V \sim


Pack	Cat.Nos	Single pole 230/400 V \sim	
	C curve	Nominal rating In (A)	Number of modules
12	4 191 99	6	1
12	4 192 00	10	1
12	4 192 01	13	1
12	4 192 02	16	1
12	4 192 03	20	1
12	4 192 04	25	1
12	4 192 05	32	1
12	4 192 06	40	1
12	4 192 07	50	1
12	4 192 08	63	1

Pack	Cat.Nos	2-pole 230/400 V \sim	
	C curve	Nominal rating In (A)	Number of modules
6	4 192 21	6	2
6	4 192 22	10	2
6	4 192 23	13	2
6	4 192 24	16	2
6	4 192 25	20	2
6	4 192 26	25	2
6	4 192 27	32	2
6	4 192 28	40	2
6	4 192 29	50	2
6	4 192 30	63	2

Pack	Cat.Nos	3-pole 400 V \sim	
	C curve	Nominal rating In (A)	Number of modules
4	4 192 32	6	3
4	4 192 33	10	3
4	4 192 34	13	3
4	4 192 35	16	3
4	4 192 36	20	3
4	4 192 37	25	3
4	4 192 38	32	3
4	4 192 39	40	3
4	4 192 40	50	3
4	4 192 41	63	3

RCCBs RX³

residual current circuit breakers from 25 A to 80 A - AC and A types

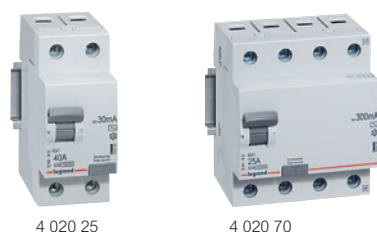

4 020 25

4 020 70

Conform to IEC 61008-1

- AC type : detect AC component faults
- A type : detect AC and DC component faults

Do not accept auxiliaries

Compatible with prong-type and fork type supply busbars

Pack	Cat.Nos	2-pole - 230 V \sim		
		AC type		
		Sensitivity (mA)	In (A)	Number of modules
1	4 020 24	30	25	2
1	4 020 25	30	40	2
1	4 020 26	30	63	2
1	4 020 27	30	80	2
1	4 020 28	100	25	2
1	4 020 29	100	40	2
1	4 020 30	100	63	2
1	4 020 32	300	25	2
1	4 020 33	300	40	2
1	4 020 34	300	63	2
		A type		
1	4 020 36	30	25	2
1	4 020 37	30	40	2
1	4 020 38	30	63	2

Pack	Cat.Nos	4-pole - 400 V \sim neutral on right-hand side		
		AC type		
		Sensitivity (mA)	In (A)	Number of modules
1	4 020 62	30	25	4
1	4 020 63	30	40	4
1	4 020 64	30	63	4
1	4 020 66	100	25	4
1	4 020 67	100	40	4
1	4 020 68	100	63	4
1	4 020 70	300	25	4
1	4 020 71	300	40	4
1	4 020 72	300	63	4
		A type		
1	4 020 74	30	25	4
1	4 020 75	30	40	4
1	4 020 76	30	63	4

RCCBs RX³

technical characteristics

■ AC type - Standard applications

AC type RCCBs detect sinusoidal AC residual currents

In the majority of cases (standard applications), they are used for AC current detection at 50 Hz

■ A type - Specific applications: dedicated lines

In addition to the characteristics of AC type RCCBs, A type RCCBs also detect pulsating DC residual currents



They are used whenever fault currents are not sinusoidal

They are particularly suitable for the following specific applications : hobs, washing machines or materials that may produce DC fault currents, speed drives with frequency inverters, etc.



EXB 14012 - July 2014 - Pictures: istockphoto

FOLLOW US
ALSO ON

- @ www.legrand.com
-  www.youtube.com/legrand
-  twitter.com/legrand_news



World Headquarters
and International Department
87045 Limoges Cedex - France
☎ : + 33 (0) 5 55 06 87 87
Fax: + 33 (0) 5 55 06 74 55