

GET IN TOUCH WITH ARTEOR™

A WORLD OF NEW POSSIBILITIES



2021 EDITION

THE GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand®**









WORLD IN PROGRESS

ARTEOR™ IS PART OF IT

Digitalisation and networks are changing everything: how we live, communicate, work and shape our environment. Homes, offices, hotels and public buildings are becoming smarter all the time and ever more amenable to what their occupants want.

Arteor exploits these new opportunities and is also easy to install, configure and use. With its new functions, innovative operating concepts and updated design, Arteor provides universal solutions to the problems encountered by dealers, retailers, installers, systems integrators and planning specialists all over the world – as well as the expectations of their clients.

CONTENTS

2-5 GENERAL FEATURES		WORLD IN PROGRESS ARTEOR™ IS TRULY INTERNATIONAL	02 04
6-10 NEW FINISHES		NEW NEUTRAL FINISHES A WIDER CHOICE OF METALS ARTEOR™ ON TREND	06 08 10
11-17 NEW ARTEOR™ FUNCTIONS		USB CHARGERS FOR THE HOME WIRELESS CHARGERS LIGHTING SOLUTIONS	11 14 16
18-35 ARTEOR™ WITH NETATMO		THE SMART, RADIO BASED SOLUTION FOR THE CONNECTED HOME. SIMPLE - OPEN - ADAPTABLE	18
36-51 ARTEOR™ MYHOME_UP		THE COMPLETE BUS BASED SYSTEM FOR TOTAL HOME CONTROL	36
52-53 ELIOT PROGRAM		OPEN TO INTEROPERABILITY	52
54-57 UX FOR UPSCALE HOTELS		A NEW SET OF DEDICATED ROOM CONTROLLERS FOR PREMIUM LEVEL ESTABLISHMENTS	54
58 -125 CATALOGUE PAGES		ARTEOR WIRING DEVICES, ARTEOR WITH NETATMO, MYHOME_UP, HOTEL SOLUTIONS	58




GLOBAL SOLUTIONS

ARTEOR™ IS TRULY INTERNATIONAL

Across our globalised world, people's needs and expectations are increasingly converging. The same can be said of lifestyles and the desire for greater convenience, security and an efficient use of resources. Although this genuinely global trend is fuelled by technology, barriers do still exist in the form of regional standards. Arteor helps overcome these obstacles and enables planners and developers operating at a global level to implement their projects all over the world. This is achieved by setting the same high standards, regardless of location, in terms of functionality, design, simplicity of installation, configuration and use.


The Arteor range is remarkably modular, enabling the implementation of complex projects of any scale and complexity without having to compromise on the systems used. Arteor also supports integration of technologies from third parties, which is an increasingly important criterion for international projects in general, and hotel projects in particular.




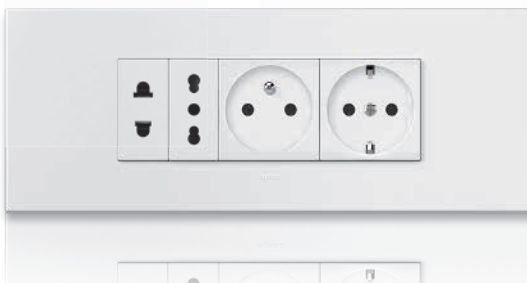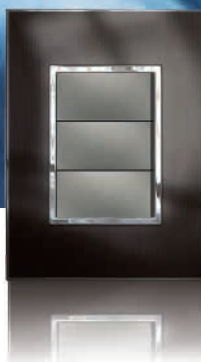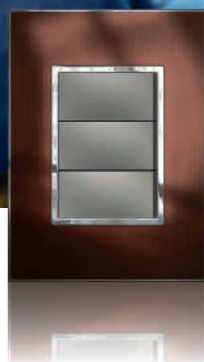


TIMELESS HARMONY

NEW NEUTRAL FINISHES

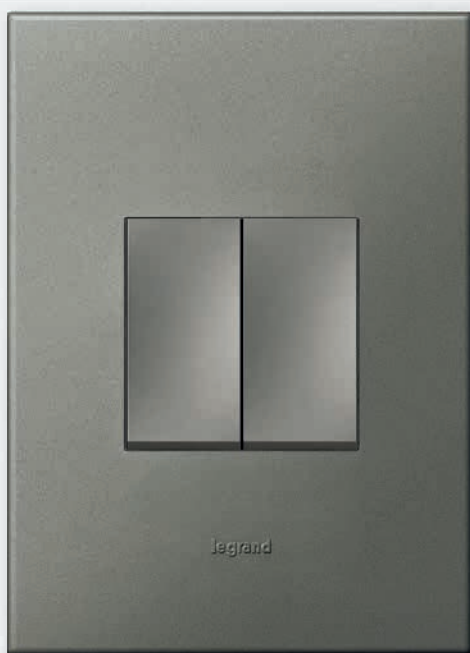

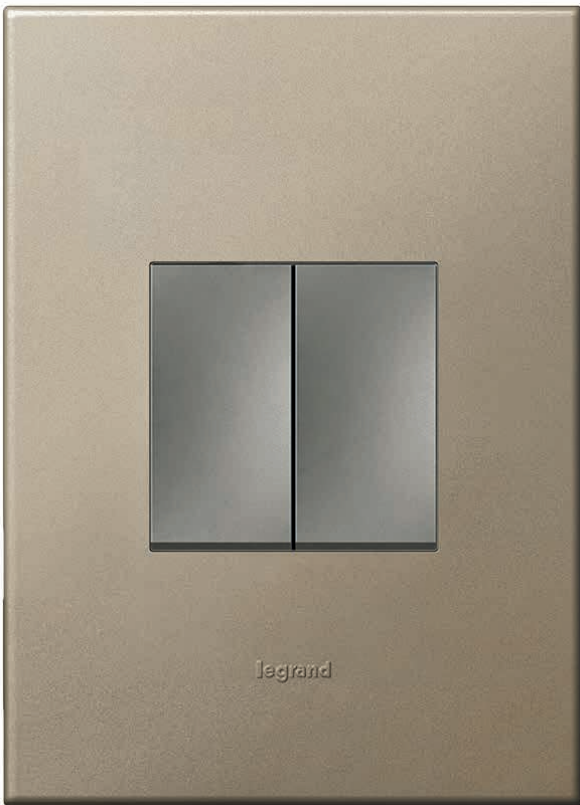

CHAMPAGNE

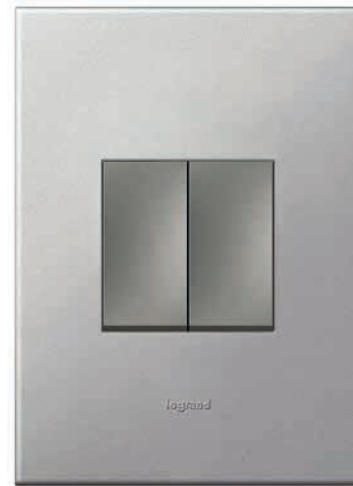

SOFT ALU



WHITE

NEUTRAL FULL COLOUR

This neutral and minimalist collection leaves plenty of room for contemporary design concepts. An extended colour range with new plate and mechanism colours gives designers even greater freedom.



MAGNESIUM

NEW COMBINATIONS

Arteor meets customisation requirements by offering more ways to combine colours. But the more technology shapes our lives, the more we want it to blend in discreetly with our individual environments. This is why clean lines and a pared-down look define the design philosophy of the range.



DARK BRONZE



GRAPHITE

STRONG IMPACT

A WIDER CHOICE OF METALS



REFLECTIVE METAL

A new collection made of metal finishes provides a suitably brilliant solution for more demanding projects. Elegantly discreet despite their mirror finish, these switches blend seamlessly into their environment. Available in gold and other colours, they give a definite nod to the technology involved.

Opposite Page - Reflective Metal Black



STAINLESS STEEL



GOLD

BRUSHED METAL

Two further colours have been added to this relatively neutral but prestigious collection of brushed metal finishes. "Pink Champagne" (a warm, reddish brown) and "Black" offer designers a wider choice for high-end applications.



PINK CHAMPAGNE



STAINLESS STEEL



BLACK



GOLD BRASS



OUT OF THE BOX

ARTEOR™ ON TREND



CUBE

In the Wood collection, nature and technology combine to create an original, appealing finish. The unique texture of Signature Cube turns this extraordinary finish into a sophisticated modern design element and creates a unique combination of look and feel.




GREY OAK

Both collections create an impression of discretion and technical sophistication. Chromed metal accents reinforce the image of a prestigious product. A bevelled profile ensures an on-trend slimline look.

KEEP IN TOUCH

NEW ARTEOR™ FUNCTIONS




You have to be connected to get on. This is why options to charge mobile devices, wherever you may be, are so essential these days. Arteor offers chargers in various versions for this very reason, whether you're out and about, at home, in a hotel, or at the office. USB chargers or wireless chargers – they both allow to keep your mobile devices charged and running, anywhere and any time.

A L W A Y S F U L L P O W E R

USB CHARGERS FOR THE HOME




Conveniently placed USB chargers at home allow you to charge your mobile devices easily wherever it's handy: near the entrance, by the bedside or in the kitchen... Arteor has a suitable solution for every kind of mobile device – including, of course for the new generation with USB C-Type connection.

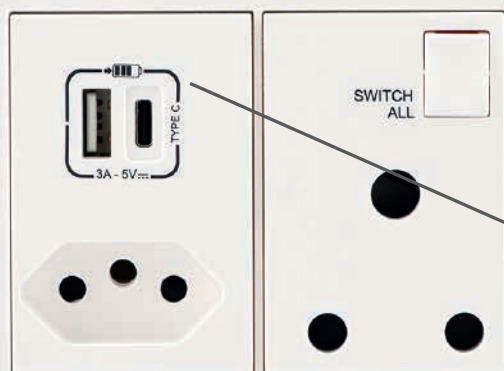

THE NEW 16A RSA SOCKET OUTLET WITH USB CHARGER

Featuring both the **old and new RSA 2P+E sockets** as well as **USB A-type and C-type sockets**, our new monobloc provides convenience and efficiency.



13 A BS SOCKET OUTLET WITH USB A-TYPE CHARGER

USB CHARGER

These modular charging sockets with a C-Type USB charging port comply with IEC 62684-2011-1. Aesthetically pleasant, they can be used to charge any mobile device, both at work and at home.

USB A-TYPE AND C-TYPE CONNECTIVITY

More and more mobile devices are equipped with the new C-Type USB. With Arteor, you are ready for this development today: the new Arteor monoblocs are equipped with two different USB charging ports, A-Type and C-Type 3 A - 5 V = 15 W.



MODULAR USB A-TYPE + C-TYPE CHARGER 5V = 3 A - 15 W



MODULAR DOUBLE C-TYPE USB CHARGER 5V = 3 A - 15 W

WHEREVER YOU ARE

WIRELESS CHARGERS

Use at work and on the move requires a different set of features, with adaptability and robustness top of the list. With their pleasing aesthetics, Arteor chargers are even more universally suitable.



WIRELESS CHARGER + A-TYPE USB

This Arteor wireless charger features an additional A-Type USB port for simultaneous charging of two devices – a smartphone with a Qi receiver via induction and a tablet via the USB port. To be mounted on the wall, installed in a cable column, or as part of a multi-outlet extension in the office or at home (e.g. in the kitchen).



QI WIRELESS CHARGER FOR INTEGRATION INTO FURNITURE

The Qi wireless charger comes with an extra-slim design for integration into furniture, e.g. in meeting rooms, offices or public spaces. Also suitable for kitchen worktops at home. Supplied with external 110 – 240 V universal power supply. Plugs comply with European, BS, US and Australian/Chinese standards.



FLUSH-MOUNTED WIRELESS CHARGER FOR PUBLIC AREAS

IK 08 – IP 66, impact-resistant and weatherproof design, specifically created for public areas such as restaurants, waiting rooms, libraries, passageways or transit areas, and even swimming pools.



Wireless Power Consortium: 750 members, ensuring interoperability with induction-compatible phones.

Qi: global standard adopted by vehicle manufacturers/café/restaurants/hotels



Legrand is member of the Wireless Power Consortium. Legrand wireless chargers are conform to the Qi WPC standard.

THE RIGHT M O O D

ARTEOR™ LIGHTING SOLUTIONS

Light creates atmosphere, emphasizes room features and helps overcome emergencies. Arteor solutions provide bright prospects for developers and decorators who want to make a very deliberate use of lighting in their projects.



UNIVERSAL PUSH-BUTTON DIMMER FOR ALL TYPES OF LAMPS


With the Universal dimmer for all modern loads including dimmable CFLs and LEDs Arteor makes it easy to create individual lighting moods.

Convenient to use:

33% and 66% luminance are preset, and there is a level memory function too. The night light function with its slow dimming feature is a practical solution for bedrooms or children's rooms.


Easy installation:

Two cables are enough as a neutral wire is not required
– ideal for renovations or installation work carried out at a later time.

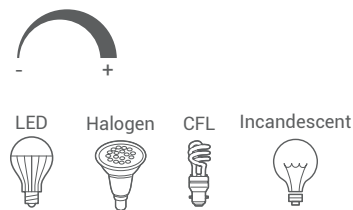

READING LIGHT AND REMOVABLE TORCH

Having just the right light for every situation is not just handy, but also deeply reassuring. Arteor provides this security through specific solutions that fit harmoniously with the overall design of the installation while bringing users genuine added value.

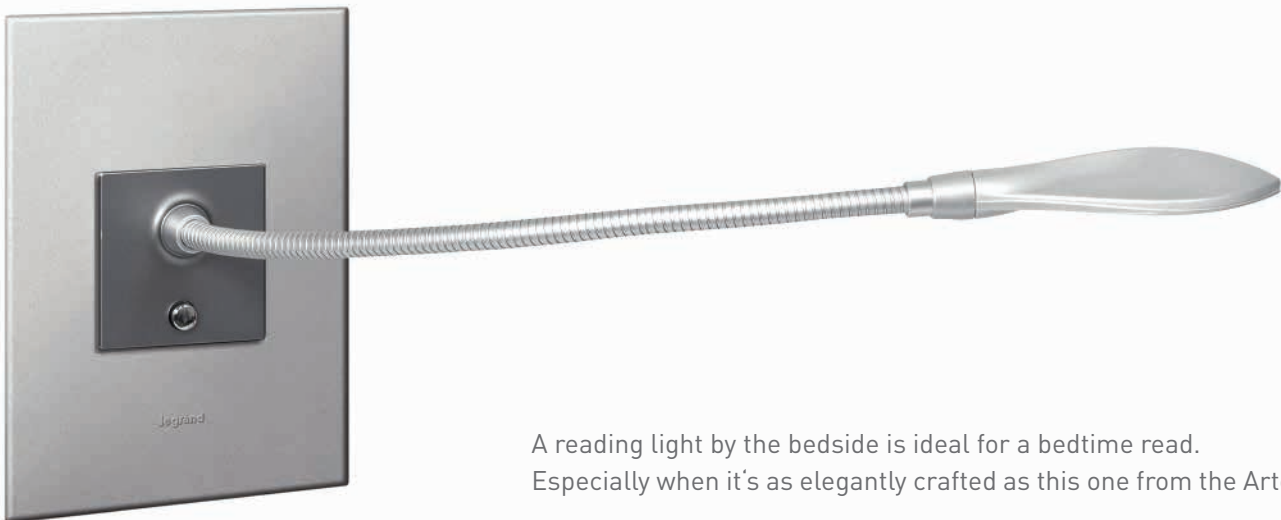

A reading light by the bedside is ideal for a bedtime read.
Especially when it's as elegantly crafted as this one from the Arteor range.



This compact battery lamp is both an emergency light and a torch at once. It comes on automatically in the event of a power cut and can easily be unplugged from its holder for handheld use.



CONNECTED LIVING

MAKE YOUR HOME TRULY YOURS

ARTEOR™ with NETATMO

Increasing digitalisation and networking are making our lives ever simpler and more convenient, as technology transforms the way we work, communicate, travel and live at home. But greater possibilities also bring greater complexity. This is why Legrand, in developing Arteor with Netatmo, has sought to make networked digital technology as easy as possible, for designers, installers and users of living space.

The result is the radio solution “Arteor with Netatmo” which has been developed in collaboration with French industry-leading smart home brand Netatmo. Enhancing individual comfort and security in the connected home, it is really quick and easy to install and it will flexibly and economically adapt to changing habits, aspirations and needs over time.





Arteor with Netatmo is part of Legrand's ELIOT program. This program is dedicated to developing sustainable connected solutions that are easy to use and maintain, accessible for everybody and customisable to the users' needs, desires and habits. To enhance the value of any home and make everyday life just that little bit more comfortable and secure.

ARTEOR™ WITH NETATMO

ADD A TOUCH OF SMARTNESS



ARTEOR™ with NETATMO

THE SMART RADIO SOLUTION

Arteor with Netatmo is a radio based solution for the connected home. The intelligent products communicate with one another via radio ZigBee (2.4 GHz waveband). This means there is no need for specific or extensive cabling. Also, although the range only contains a few products, these can be used to create lots of individual solutions for a more customised feel at home.

SIMPLE, ADAPTABLE, OPEN

Arteor with Netatmo has been designed and developed as a simple solution to make every house more individual, convenient and secure. Simple for planners, who are able to integrate many useful functions without having to provide for complicated cabling. Simple for installers, who are able to install the system without a great deal of effort or specialist knowledge. Simple for users, who will find it convenient to operate, easy to extend and are able to make changes at any time.




APP CONTROL FOR EASE OF USE

All functions in an Arteor with Netatmo installation can also comfortably be controlled on your smartphone or tablet: switching individual lights on or off, controlling roller blinds, curtains and electrical appliances or triggering more complex scenarios - using the app, you have everything under control. And you stay connected with your home, no matter where you are.

VOICE CONTROL

Using voice commands, the installation can be managed without lifting a finger.

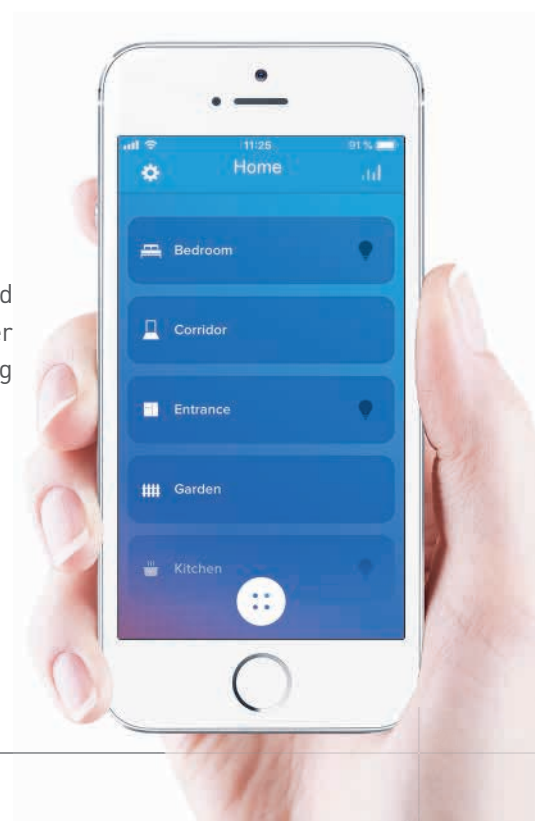


GROWING WITH USERS' NEEDS

ADAPTIVE TO SUIT OUR EVER-CHANGING LIFESTYLE

Its simple installation makes Arteor with Netatmo a really smart choice. No complex BUS system or cabling is needed to adapt the solution smoothly to changing circumstances. Putting a switch within reach of children, rearranging the living room, converting a kid's bedroom into an office, adding more functions...
- Arteor with Netatmo will change as readily and as quickly as you do!


PUT THEM ANYWHERE

Using wireless switches you can ensure your controls are always exactly where you want them, for example lower on the wall to be within easy reach of the children. They can be repositioned as your children grow or when you decide to rearrange your furniture.

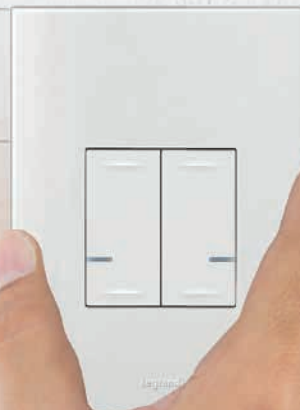

ALERTS

If there's a power failure when you're not at home, the app will warn you instantly so you can take action.

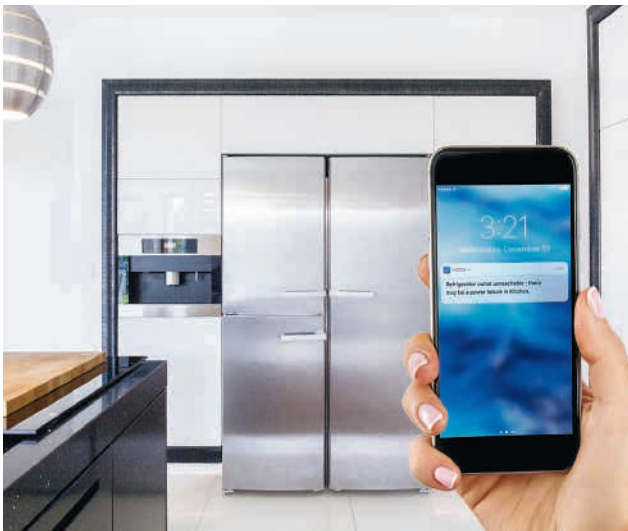

ENERGY MANAGEMENT

Whether to check your real-time energy consumption or to do a more long-term, in-depth analysis, the app will help you all the way towards greater energy efficiency.



“LEAVING HOME” SCENARIO

A single press will turn off the lights and close all the shutters as you leave the home, meaning you save time and gain convenience.



“WAKE UP” SCENARIO

Have soft light come on and the shutters open for a great start to the day, every day!




FEW COMPONENTS – LOTS OF OPTIONS

The system consists of only a few simple components. The 'Gateway Kit' that needs to be installed to start, connected controls which trigger actions, such as controlling lights, roller blinds and electrical appliances and wireless, battery powered controls. They manage scenarios, create centralised functions and allow remote control of individual functions.

CONNECTED WIRED PRODUCTS

The wired products are installed in the same way as conventional components and then paired with the wireless switches (which can be positioned anywhere) via the ZigBee 2.4 Ghz waveband. Thanks to the dynamic mesh network, all functions can easily be reconfigured at any time. It is also easy to add extra modules.

Wired devices (230 V AC)


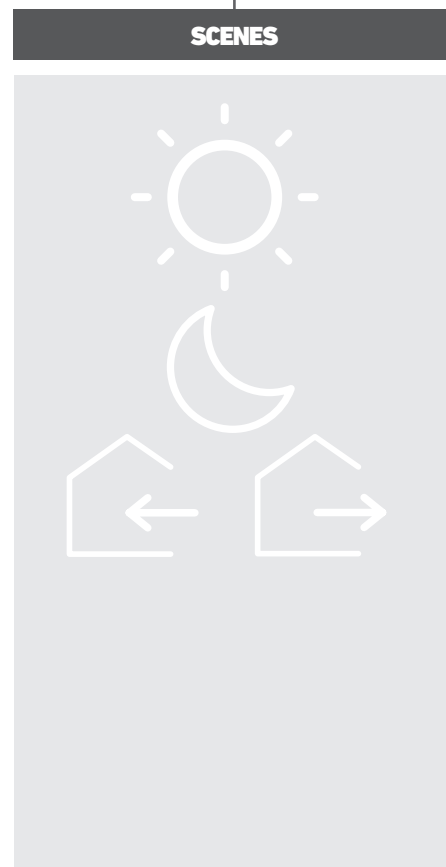


WIRELESS CONTROLS

Wireless light and roller blind switches are used to extend the installation and enable individual, group-based or centralized remote control of lighting and roller blinds. They are adaptable to take into account evolutions of the installation over time.

Wireless scenario controls are used to activate pre-programmed, more complex scenarios that enhance comfort when you wake up in the morning or go to bed at night, leave the house or come home.

Wireless devices (battery powered)

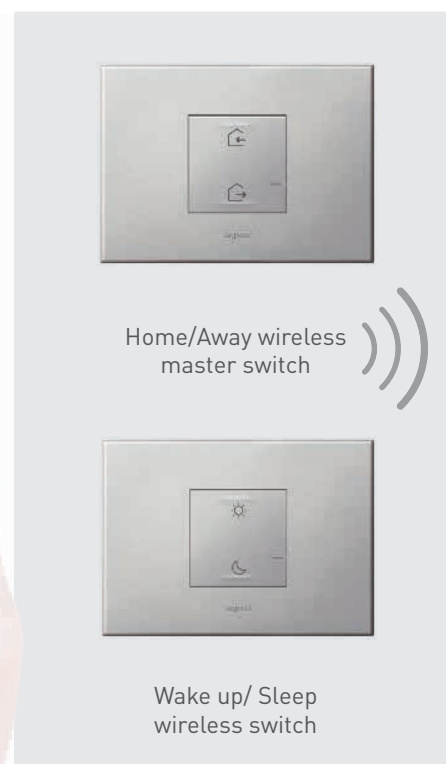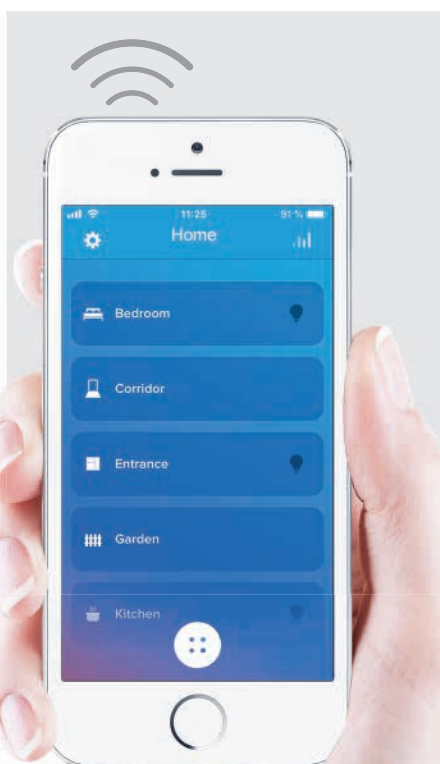

FUNCTIONS

LIGHT




Connected light switch
with dimmer option, 2 modules
Connected light switches, 2x1 module,
Micromodule switch



Wireless 1-gang and 2-gang light
switches

CURTAINS/ ROLLER BLINDS



Connected
curtain / roller blind switches
2 x1 module



Curtain/roller blind wireless switch

ENERGY



Connected mobile socket outlet,
Energy module for rail mounting
Connected socket outlet module

The Home + Control App,
which can be used to control
the system via smartphone
and tablet, is available for
devices with Android and
iOS. Download it for free
from your usual app stores.




HOME + CONTROL App



EVEN THE VERY FIRST STEP IS SMART

ARTEOR™ WITH NETATMO AT A GLANCE

Many useful functions can be implemented at home using just a few different devices. To start the connected installation with Arteor with Netatmo, the Gateway kit consisting of the gateway and master switch is essential.

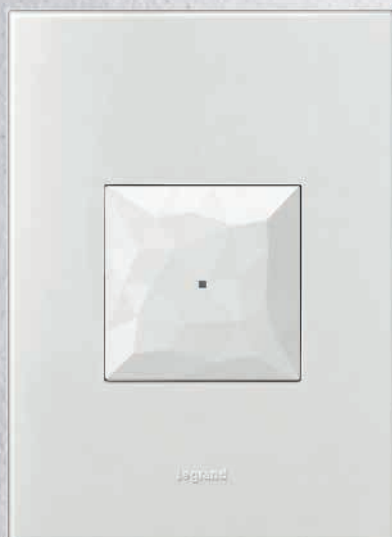


GATEWAY

Connects the Arteor with Netatmo system to the home Wi-Fi network. The Gateway is necessary in order to use the Home + Control App and thereby enables convenient control of the installation via smartphone, tablet or via voice control.




WIRELESS MASTER SWITCH

Used to create the ZigBee radio network (2.4 GHz waveband) via which all components within the system communicate with each other. No need for complicated cabling. The Home / Away wireless master switch also allows to launch the preset life scenes "Leave Home" and "Back Home".

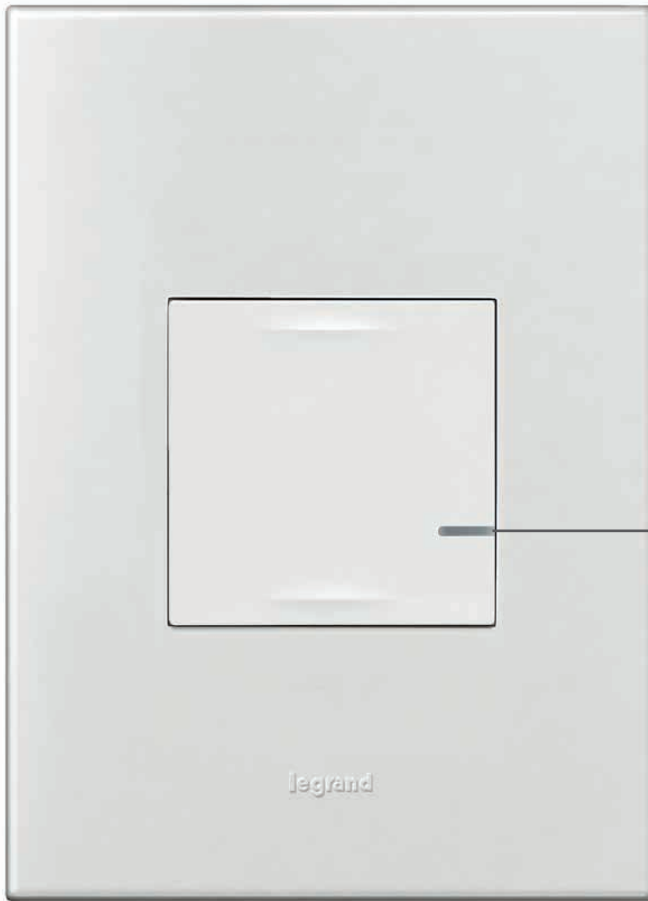



Few components are required to enable control of lighting and shutters, more complex scenarios and electrical appliances via switched outlets. The system's modular structure allows for easy adaptation to changing needs and enables extensions any time they are required.

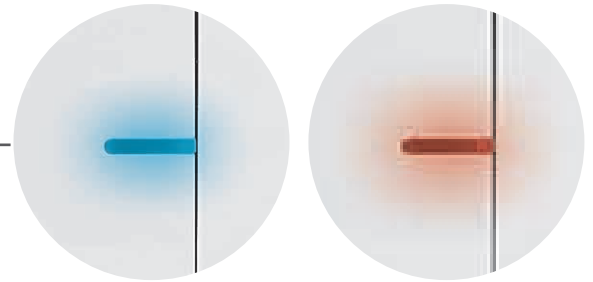

The LED in the switch serves as a locator while also signalling the product's status. During pairing, its changing colours guide you through the process.

THE CONNECTED SWITCH - 4 IN 1

This compact, smart and versatile product combines 4 functions in one: both a switch and a dimmer, it also has indicator and locator features. All this in a device just 34 mm deep, fitting any standard mounting box.

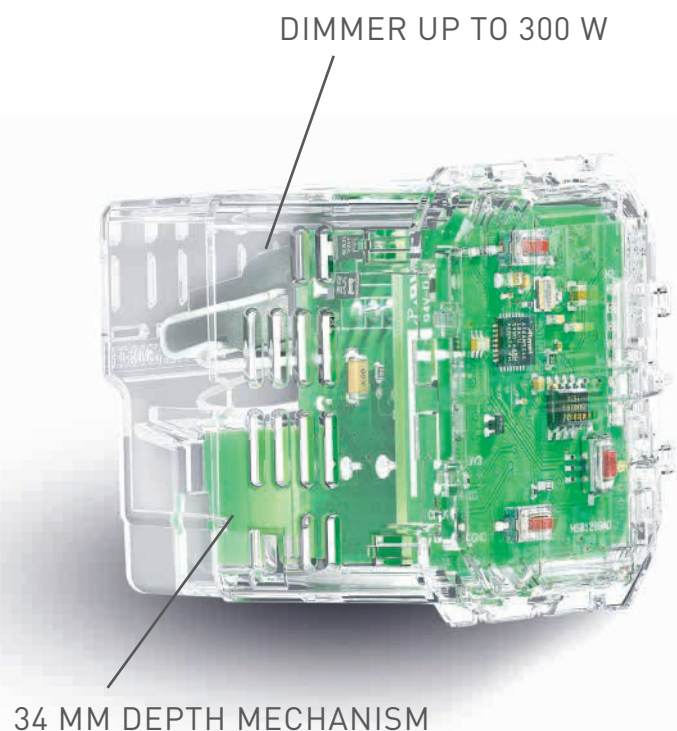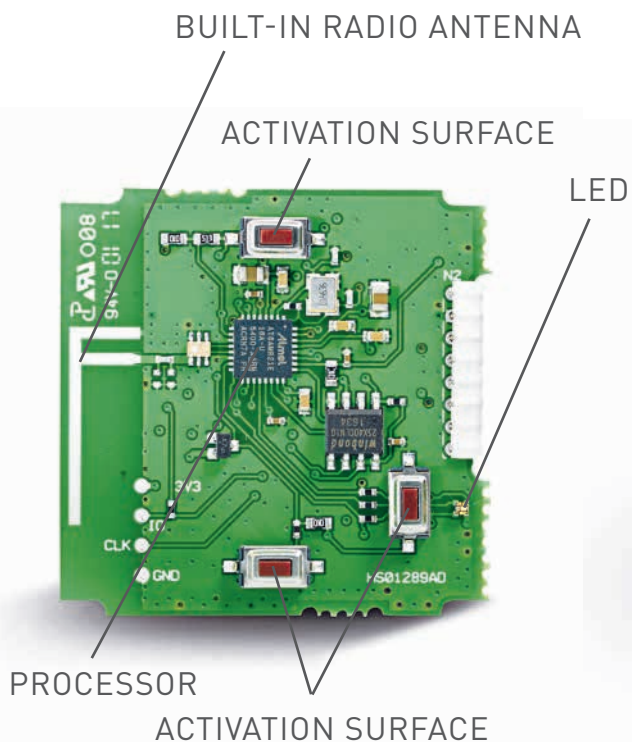

AS INDIVIDUAL AS YOU ARE

FUNCTIONALITY MEETS DESIGN

Arteor with Netatmo doesn't only offer individual responses to all user requirements in terms of functionality. It also adds a touch of style to the overall look and feel of the house. Arteor finishes blend in perfectly to any kind of living environment.



SCENARIOS

Increase comfort through pre-programmed life scenes, such as Wake up / Sleep or Home / Away.



ROLLER BLINDS/ CURTAINS

For convenient individual or central control of roller blinds. Locally or remotely.




CONNECTED SOCKET OUTLETS

Allow to remotely control electrical appliances, measure instantaneous consumption, monitor daily or monthly consumption and to be alerted with smart notifications.



LIGHT

Convenient control of lights with connected wired and wireless switches, with or without dimmer option.

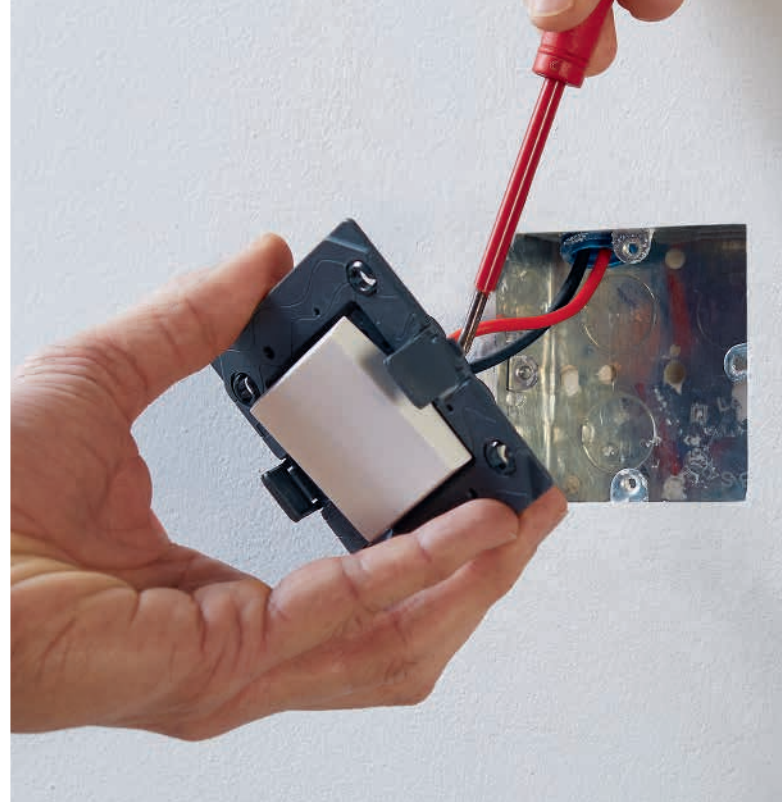


E A S Y INSTALLATION

WHETHER NEW OR RENOVATION


5 STEPS TO A CONNECTED HOME

1

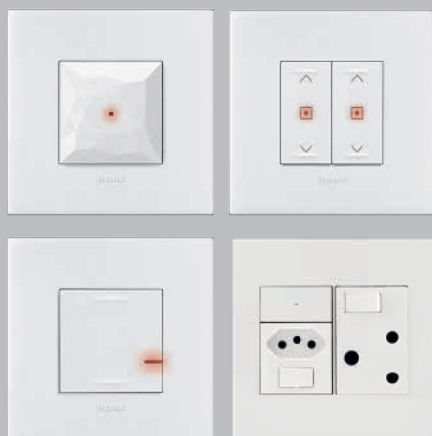


After installing all wired devices, switch on power and all LEDs will light up in red.

2

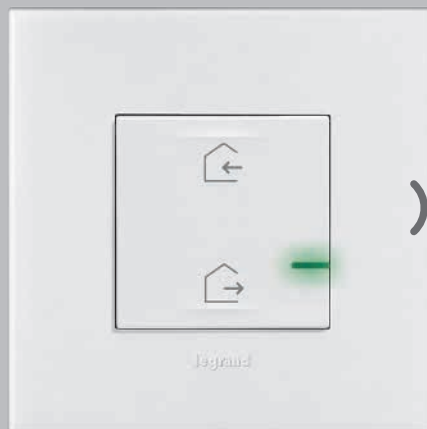


Press the master switch at its centre for 5 seconds.

3

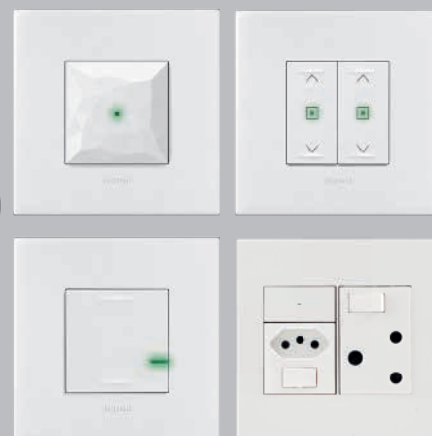


The LEDs now light up in green, showing that your network has been created.

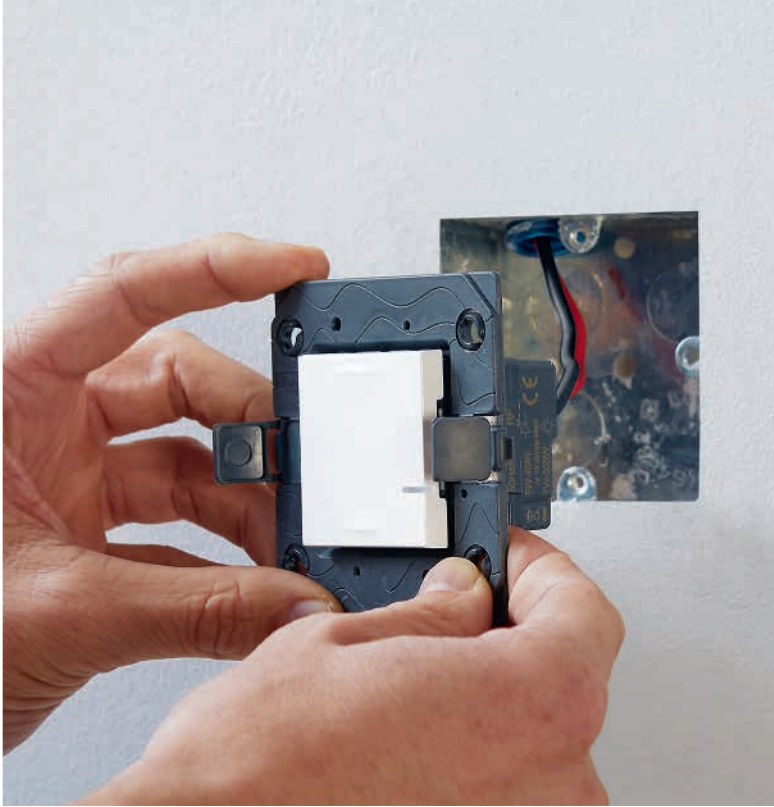


Arteor with Netatmo is a radio solution, requiring no extra wiring as it uses the existing infrastructure. This makes it the ideal choice for upgrading an existing installation into a connected home. But for new building projects, too, it offers definite advantages, as its simple installation cuts effort to a minimum.

4

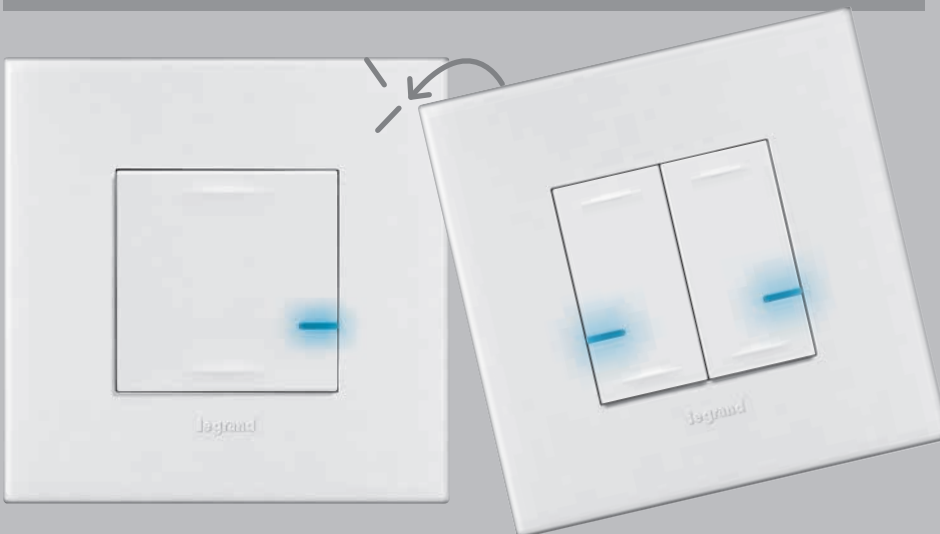

5

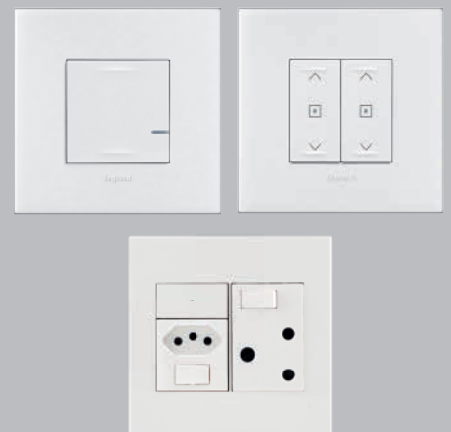

To pair them, press on the wireless switch you wish to pair, while tapping it three times onto the wired devices you wish to control. The LED's blue light tells you that the pairing was successful.

After a short press on the master switch, all LEDs turn off.

INNOVATIVE OPERATING CONCEPTS

TALK - SWIPE - TOUCH

VOICE CONTROL

As modern home technology becomes increasingly complex, it also gets to be easier to operate. Thus, for instance, Arteor with Netatmo makes it possible to control functions via voice commands. Used in combination with the Google Assistant, Amazon Alexa or Apple Siri, the system obeys the spoken word. Lighting in the home, for example, can be switched on or off with a simple word.




THE HOME + CONTROL APP FOR SMARTPHONE OR TABLET

The app on the smartphone or tablet opens up new options: monitoring of instantaneous power consumption, remote surveillance of the connected home, and control over various functions when the user is out and about.



 works with the
Google Assistant

 WORKS WITH
alexa

 Works with
Apple HomeKit



AND OBVIOUSLY LOCAL CONTROL


Of course, all functions can still be used in the traditional way via switches on the wall. If furniture needs to be rearranged or small children need to be able to reach a switch, the wireless switches can be repositioned easily at any time.

 Download on the
App Store

 GET IT ON
Google Play

HOME + CONTROL App

iPhone, iPod and iPad are registered trademarks of Apple Inc., registered in the US and other countries. HomeKit is a trademark of Apple Inc. App Store is a service mark of Apple Inc. Google, Android, Google Play, and the Google Play logo are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

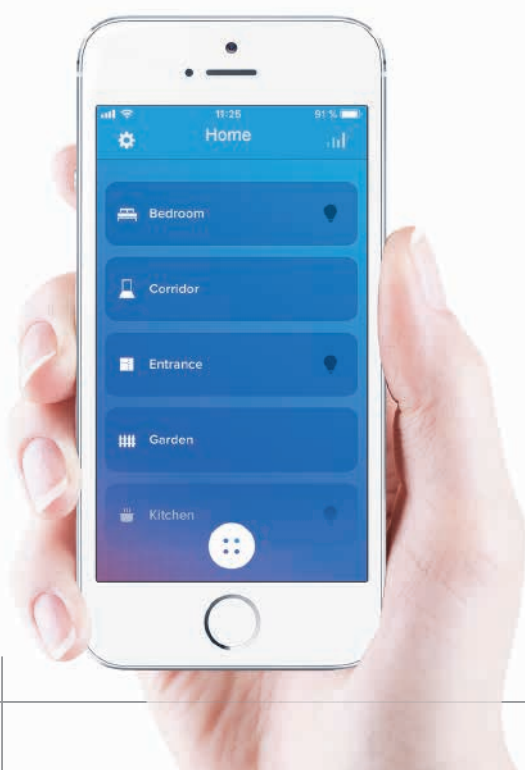

The Home + Control App changes everything not only in terms of control of the smart home but also in terms of its configuration. The installer can use the app to conveniently configure the entire system, based on the individual specifications of their customer: the function assigned to each of the components, the way they interact, the scenarios users are able to trigger - all of this can be determined using the highly intuitive app. Moreover, much of this can be input in advance, once the user's wishes have been clarified at the consultation stage. This makes life easier for installers, improves their efficiency and ensures their work is more highly valued.




HOME + CONTROL App


SMART HOME VIA SMARTPHONE

THE HOME + CONTROL APP


The app used by the installer for configuration purposes is also used to control the entire system. The remote control options it provides are particularly useful. The app displays alarm messages if, for instance, the refrigerator is no longer powered or a light remains on when noone is supposed to be at home. This means the user can react accordingly and act from a distance to prevent any greater damage.

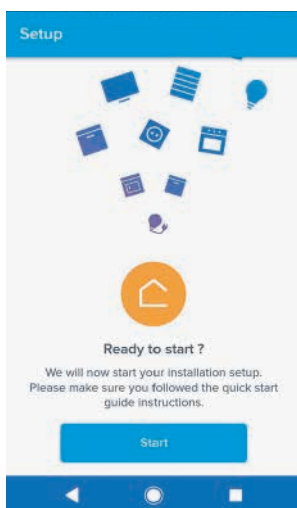


Configuration is based on a set of simple steps.

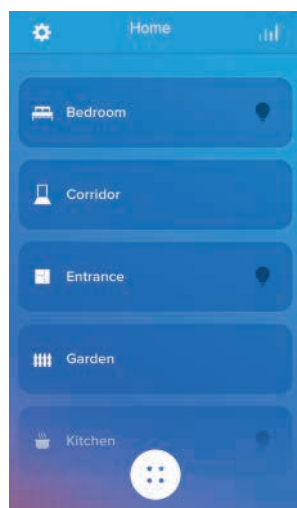


Each room is configured individually.

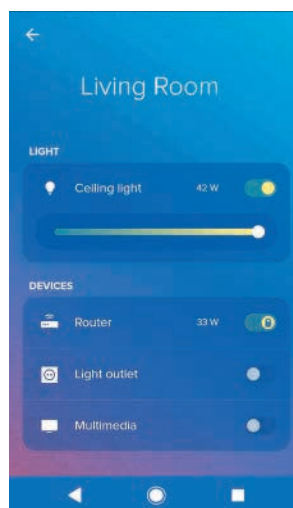


All functions can be set individually.

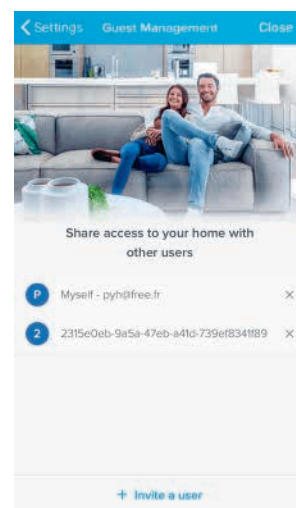


Invite each member of your family.

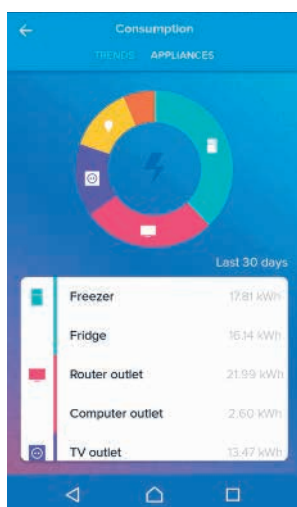


Energy consumption can be queried for individual devices.

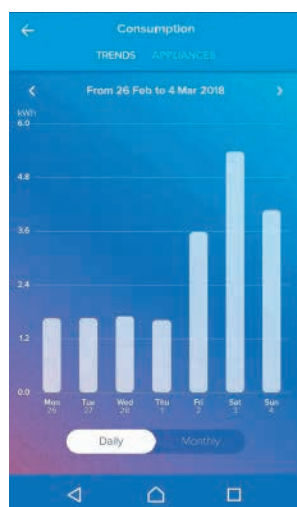

Detailed consumption analyses help save energy.

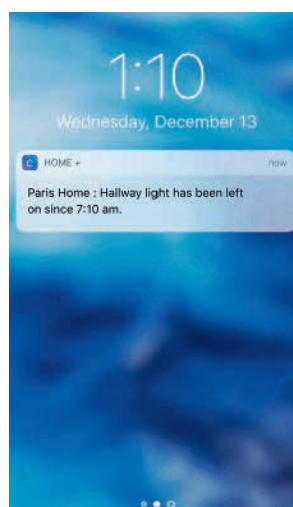

Alarm messages reach the user wherever they may be.

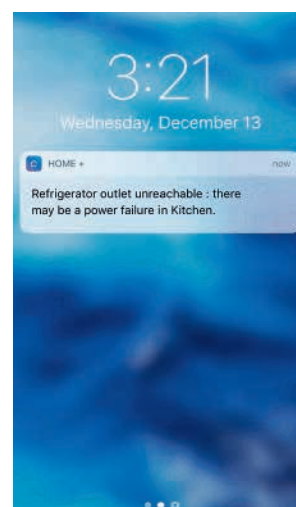

Enables fast responses to faults.

LOTS OF SCOPE FOR GRAND PLANS

FOR A FULLY CONNECTED HOME



ArteorTM MyHOME_Up

With Arteor MyHOME_Up, electrical systems can be designed and implemented to suit your individual requirements. Almost anything that building owners and residents want is possible with this tried and tested BUS system: customised scenarios, automation of numerous functions, comprehensive temperature management, playing music in every room, energy consumption monitoring and analysis, or load shedding for selected devices.

This means that the entire domestic installation can be integrated into the system. The home's lighting and roller shutters, heating and air conditioning, music and door entry system create a comfortable, secure and individual living environment, which lives up to the highest standards.

YOUR WISH IS OUR COMMAND


A wide range of control options make even complex solutions easy to use. Residents can choose, at any time, whether they want to control the functions via a wall-mounted monitor or by using conventional switches. Other options include modern touch plates or a dedicated smartphone app, and with a voice assistant, your home even obeys your spoken word.



THE HOME AUTOMATION EVOLUTION

M Y H O M E _ U P

With MyHOME_Up, the tried-and-tested BUS system is now even easier to install and use. The MyHOME_Up App not only makes configuration much simpler but it also takes the idea of user-friendliness to a whole new level.

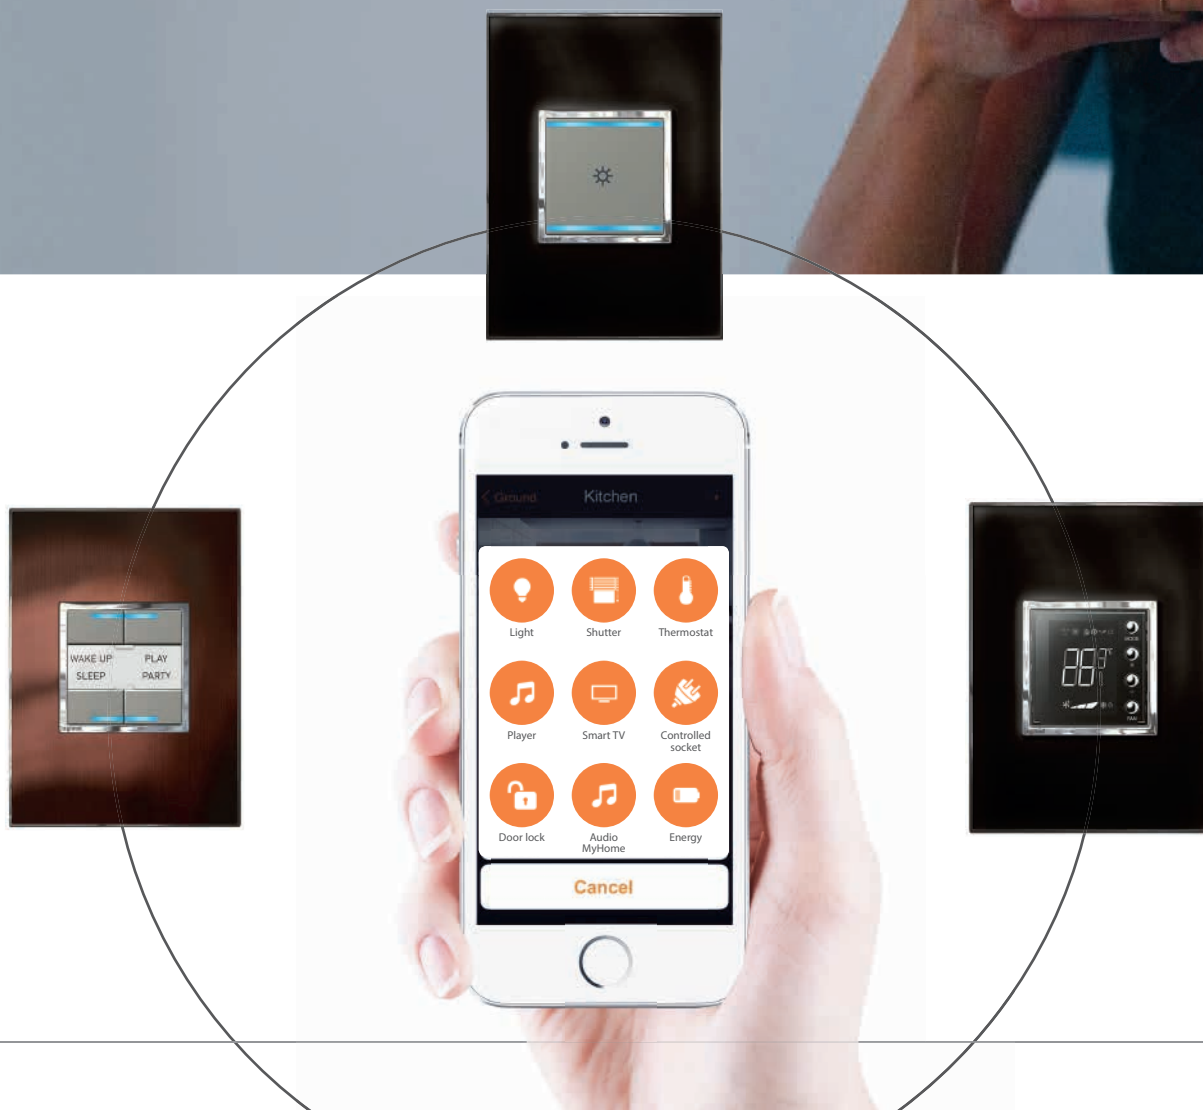





A SINGLE APP FOR BOTH INSTALLERS AND USERS

The new MyHOME_Up App for Android and iOS eliminates the concept of configuration usually associated with the BUS system. This new app is used for both to associate the devices easily and to customise and control the functions of the MyHOME_Up home-automation system. Operation is so easy that minor changes in functionality can now even be made by users themselves – while installers take care of more important tasks.

ARTEORTM MYHOME_UP

FULL CONNECTION MADE SO EASY

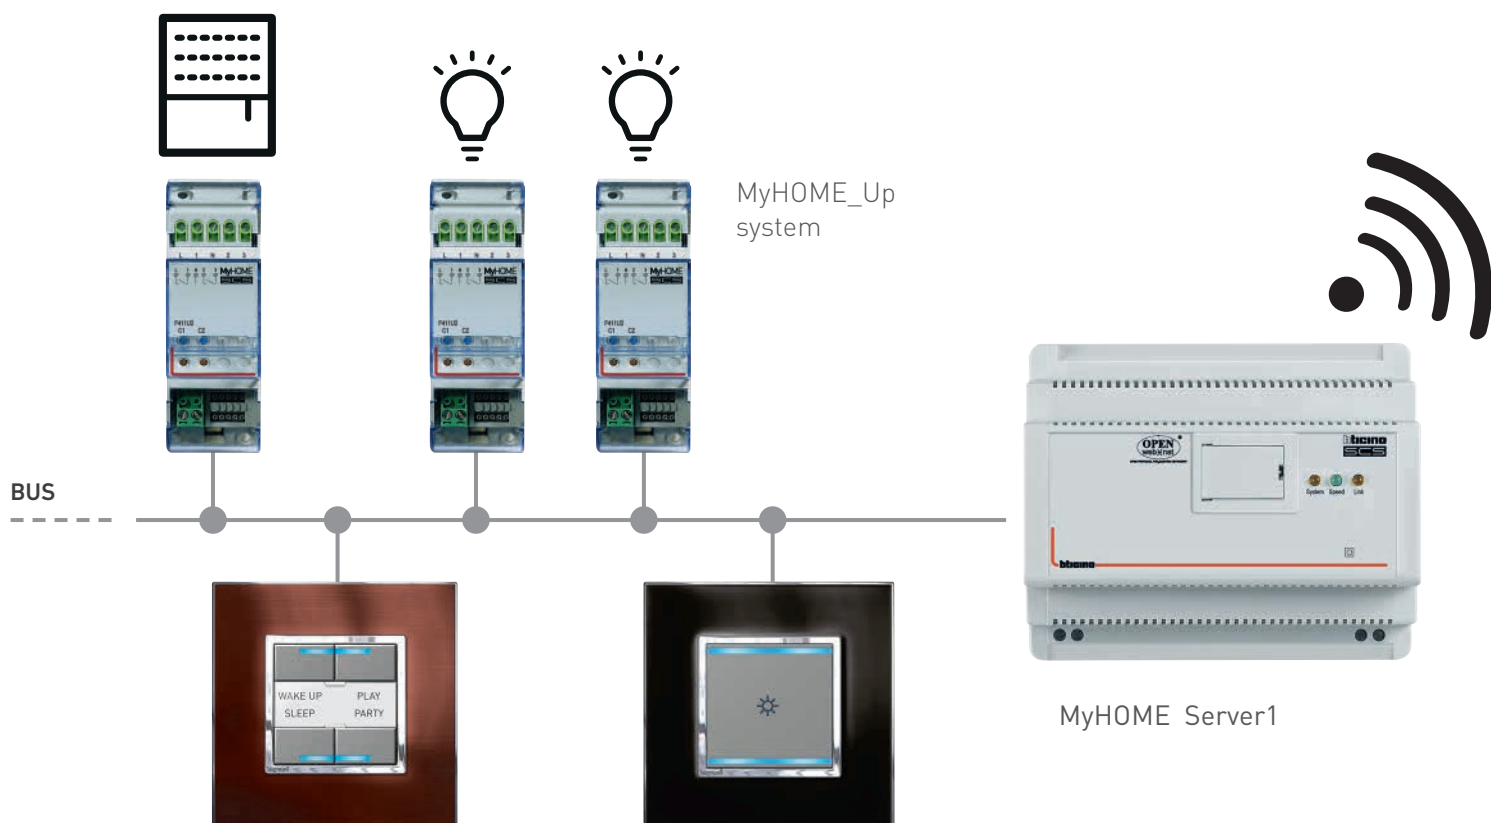

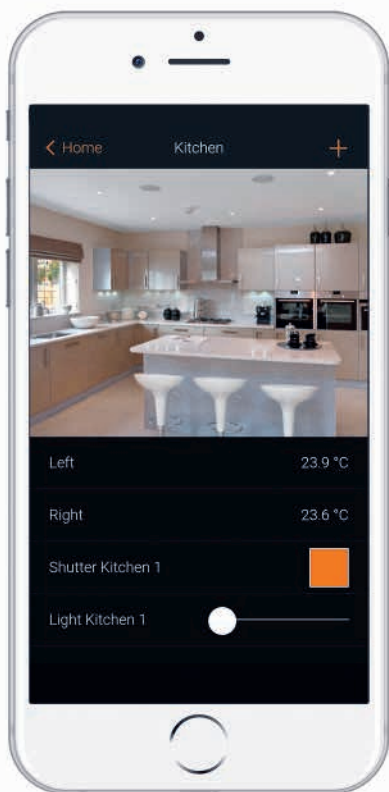

CREATE A FULLY CONNECTED SYSTEM WITH A FEW, SIMPLE START-UP OPERATIONS

1. Wire all the system components and the server to the BUS system.
2. Free-download the MyHOME_Up App on your tablet or smartphone. Once launched, it will connect to the system and make all components ready for setup.
3. For an easy installation setup, simply follow the app's instructions.
4. Once the installer has terminated the setup, the app can switch to user mode to provide full control over the system.

Download the App



A woman with dark hair tied back is looking down at a white smartphone she is holding in her right hand. She has a slight smile. In the background, a white ceiling fan with wooden blades is visible, slightly out of focus. The overall lighting is soft and warm.

YOUR COMFORT TEMPERATURE AUTOMATICALLY

INDIVIDUAL TEMPERATURE MANAGEMENT

Your smart home automatically adjusts to your personal comfort temperature via Arteor MyHOME_Up. Heating and air conditioning systems from various renowned manufacturers can be incorporated and, as the system only provides heating or cooling when and where it is needed, it not only increases comfort but also reduces energy consumption.

SMART HEATING AND COOLING

It operates with different scenarios depending on the time of day and the room's use, but also responds to departures from the normal daily routine. This way, for example, the heating is turned down when a window is opened or when you leave your home with your smartphone in your pocket. Of course, the system can also be controlled individually via the HOMETOUCH screen, local control units such as a display thermostat or the MyHOME_Up App.



COOLING




ZONE MANAGEMENT



MAXIMUM COMFORT, MINIMUM ENERGY CONSUMPTION

For maximum comfort with minimum energy consumption, the system is precisely adjusted to suit users' needs and habits. For example, certain zones within the home can be defined, which – depending on the time of day and use – should be kept at a constant temperature. The required temperature can also be set for each room individually. The system responds immediately to any changes in these temperatures. If a room heats up as the result of strong sunlight, the heating is immediately turned down to save energy. Everything can also be easily controlled remotely via the app.

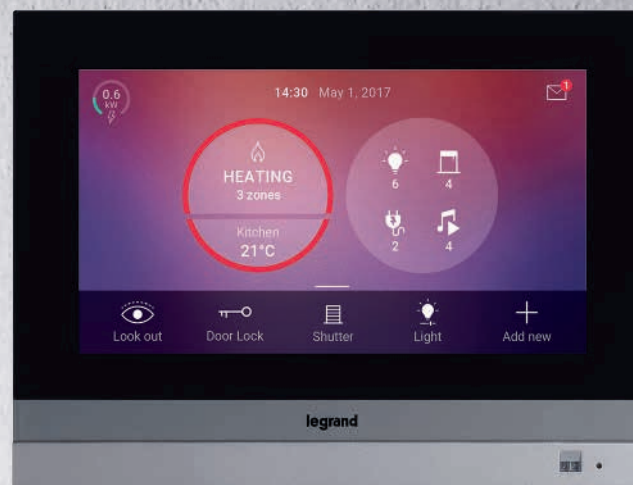


HEATING



DISPLAY THERMOSTAT

The required temperature in each room can be set precisely using this control unit. Pre-programmed routines can also be activated and the intensity of ventilation individually adjusted.

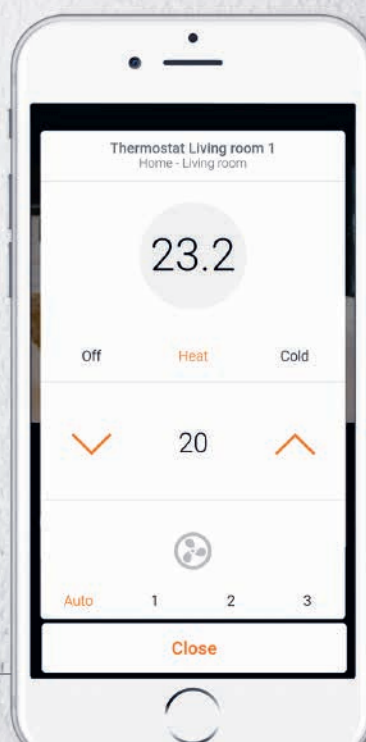


EVERYDAY LIFE SCENES

ADAPTABLE TO YOUR HABITS

SCHEDULED ROUTINES

At a pre-programmed wake-up time, the kitchen, children's bedrooms and bathroom are already at a comfortable temperature, the roller shutters open and soft music makes it easier to wake up. At night, to help you get to sleep, the "Sleep" scenario is activated: the heating is turned down, the roller shutters close and the lights are dimmed. You can also do this with a simple utterance via voice control!



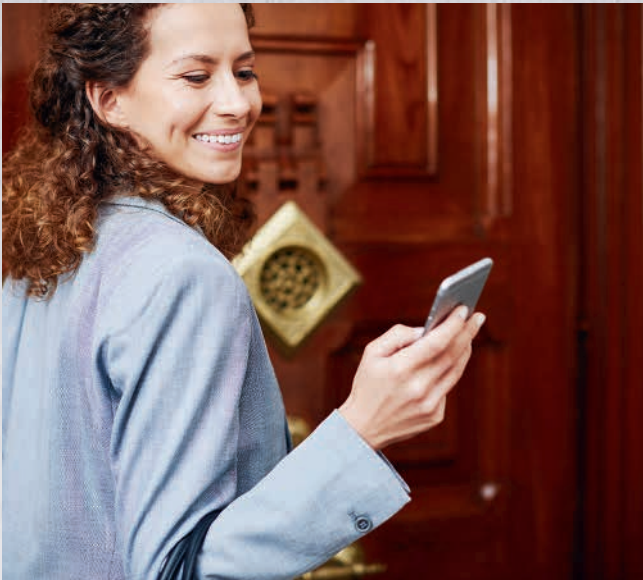


USING GEOLOCATION

Using geolocation via your smartphone, your home knows when its occupants have left. This is when the “Away” scenario starts: all the lights are turned off, the heating or air conditioning are turned down and the roller shutters close. The system recognises from a distance that you are coming home and welcomes you accordingly.



BASED ON EVENTS

Your home takes care of itself: in strong sunlight, the roller shutters close automatically or your awning is rolled out, to delay the activation of air conditioning. If there is a storm or heavy rain, your awning is rolled in and the roller shutters close, to prevent damage. With the smartphone app, users always have everything under control and can intervene remotely, if necessary.

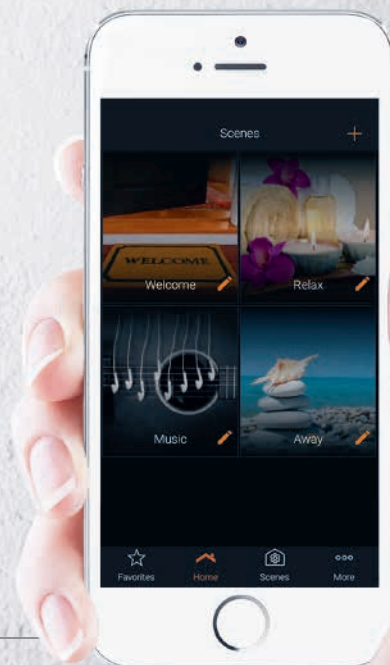

CENTRAL HOME CONTROL

H O M E T O U C H

The MyHOME_Up offer is enhanced by the new 7" touch screen HOMETOUCH. Without configuration, the device recognises MyHOME_Up functions installed on the system and makes them immediately available.



ONE TOUCH FOR TOTAL HOME CONTROL

A real all-rounder, this new display can be used to activate and control all the various home functions. The touch display also serves as a video intercom, thus enhancing home security.



ArteorTM MyHOME_Up

WHO'S THERE?



H O M E T O U C H

When used as a video intercom, the HOMETOUCH ensures all welcome guests are given the reception they deserve. It also shows uninvited visitors on its display, allowing you to decide whether to open the door to them.



A DEDICATED APP FOR VIEWING YOUR VISITORS

There is a dedicated app for the video door intercom function, and this offers greater security and convenience. This app shows live images of what is happening at the front door and provides an opportunity to react accordingly from a distance. The user can decide, at any time and wherever they may be, who they want to let in and who they prefer to keep out.

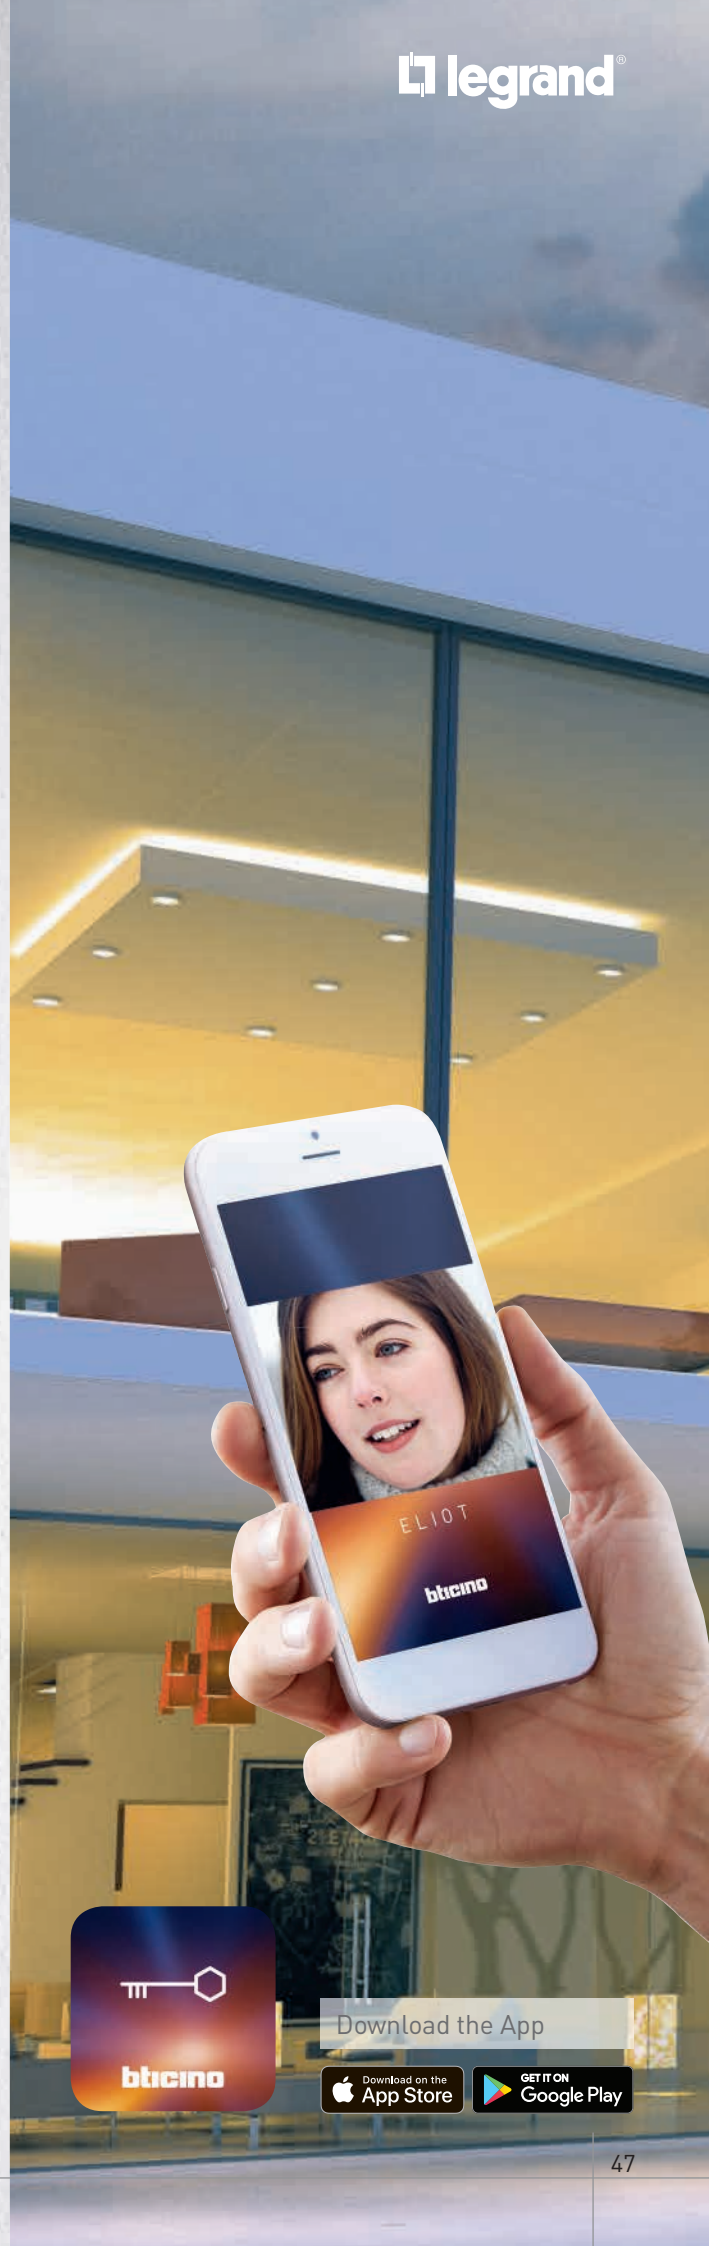

Download the App



EASE OF OPERATION JUST AS YOU WISH

MONITORING AND CONTROL




Users can choose from a large choice of options for control and monitoring. Arteor MyHOME_Up can be operated centrally or locally from every room, remotely via an app or even by using a voice assistant.

CENTRAL CONTROL WITH THE HOMETOUCH

This large touch-screen display is your home's control centre. It allows all the functions to be activated, set, adjusted and monitored, it also serves as a video door entry system. Installed at the centre of the home, it offers optimum access to the entire system.

FULL CONTROL, WHEREVER YOU ARE

No matter where you are, the MyHOME_Up App lets you steer your entire installation anywhere and at all times. It brings a whole new meaning to the concept of remote control.

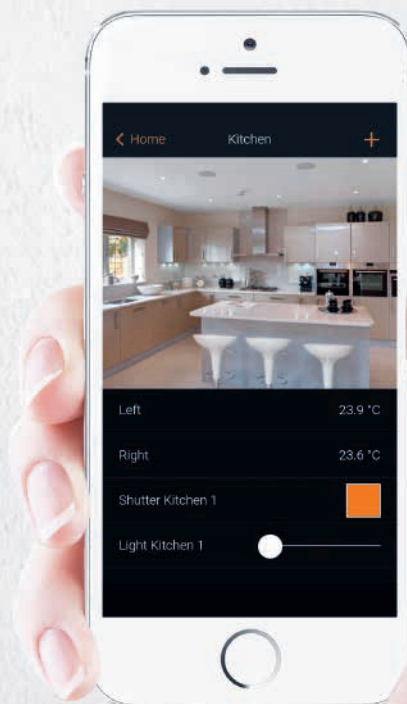


INDIVIDUAL ROOM CONTROLS

Elegant control units are available in different designs and ergonomics. Whether classic controls or advanced touch plates: they enable local control of lights, roller blinds and curtains, temperature and preset scenarios, and enhance the overall design of the installation.



VOICE CONTROL

The most convenient way of controlling your Smart Home is provided by voice assistants such as the Google Assistant, Amazon Alexa or Apple Siri. Using these, your home listens to its occupants' commands and fulfils almost all their wishes.



MUSIC STREAMING

EASY INTEROPERABILITY FOR EASY LIVING



Arteor MyHOME_Up is an open system that offers many benefits. Devices from other providers can be integrated seamlessly with a view to extending functionality even further. One example is digital streaming of music to create the perfect mood all around the house.

WORKS WITH NUVO LEGRAND'S MULTIROOM AUDIO SYSTEM

The multiroom audio system from Legrand Group brand NUVO, allows to use Internet-based streaming services and can be integrated with MyHOME_Up. Also, third party systems such as Sonos are compatible with MyHOME_Up. Music systems can be operated via installed control elements or the app.

For more information on the NUVO Multiroom Audio System from Legrand - please contact us.

NUVO®



Also works with:
SONOS

LIGHTING CONTROL


OPEN TO OTHER SYSTEMS



Modern lighting systems can be dimmed to create the desired mood. They also support the use of coloured lighting within rooms to create additional options for an individual environment. Here too, MyHOME_Up is open to other systems.

MANAGE COLOURED LIGHTS

With MyHOME_Up and the corresponding light systems, a mood can be conjured up at the push of a button, or controlled via the app for even greater convenience.

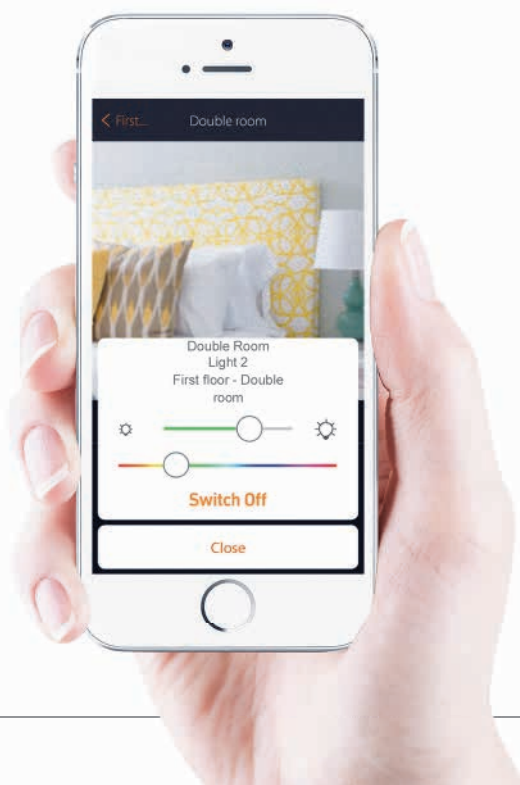

Works with:



JOINING FORCES TO MOVE FORWARD

OPEN TO INTEROPERABILITY



MyHOME_Up and Arteor with Netatmo are part of Legrand's Eliot program for the development of sustainable connected solutions for the home and workplace.

Another major component of Eliot is the implementation of a powerful and reliable electrical infrastructure and the further development of high performance networks. These are the enabling factors of communication among connected devices and therefore essential for the constant extension of the Internet of Things.

The third mainstay of the Eliot program is interoperability. The integration of Legrand solutions with third party systems allows to provide new products and services with additional benefits.

THREE PRINCIPLES OF THE ELIOT PROGRAM

DEVELOPMENT OF CONNECTED SOLUTIONS

Easy to use, accessible and providing enhanced user benefits.

CREATION OF SUITABLE INFRASTRUCTURES

To enable product communication and help develop the Internet of Things.

PROMOTION OF INTEROPERABILITY

Legrand contributes to enhancing innovation and services beyond its own ecosystem by promoting interoperability, as a genuine third party service enabler.



TOGETHER, WE CAN GO A LOT FURTHER

With its Eliot program, Legrand is on the right track, as is evidenced by a series of successful partnerships and third-party integrations.

Partnerships with innovative businesses and renowned brands:



RENAULT
La vie, avec passion




Compatibility with platforms and voice assistants:



Find out more about WORKS WITH LEGRAND

You want to learn more about the possibilities of integrating your systems with Legrand solutions? The **web portal** <https://developer.legrand.com> will provide you with a host of useful **information, tools and services.**

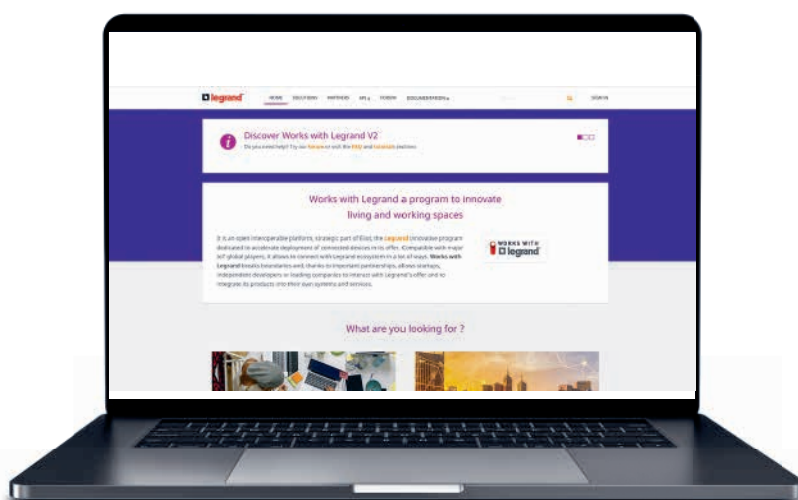




FIVE STAR SOLUTIONS


UX FOR UPSCALE HOTELS

Designed specifically for premium level establishments, UX for Upscale Hotels provides top quality solutions with its brand-new touchplates and enhanced functionalities. Operating on an open protocol, the guest room management system can seamlessly integrate with third party building management systems, thus raising hospitality to new heights across the world, in conjunction with Arteor or other Legrand wiring device ranges.

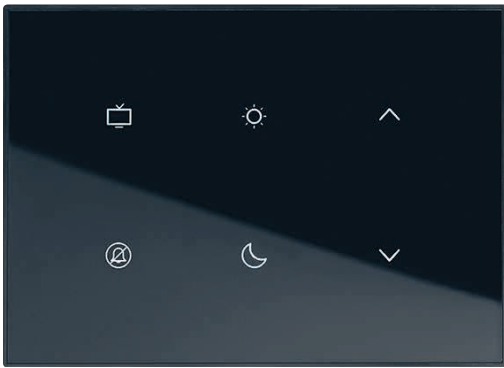


6-GANG TOUCH PLATE

It can be configured on an individual basis as a convenient way of activating various scenarios such as “television”, “work” and many more.

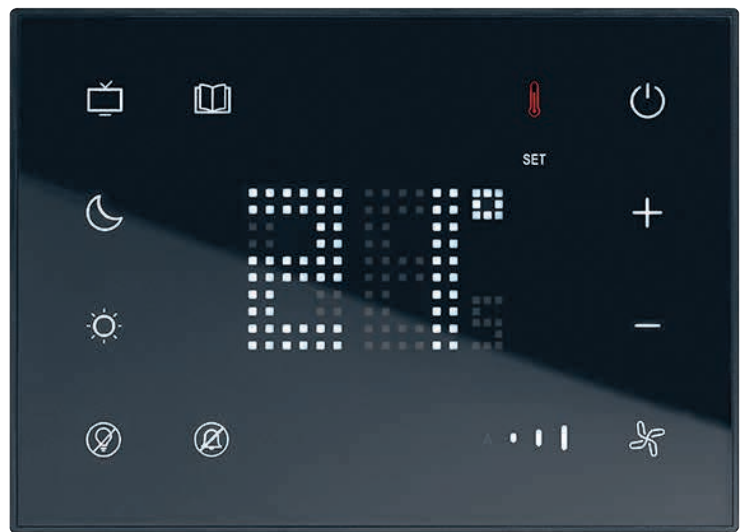

BEDSIDE PANEL

For a convenient way of triggering complex scenarios for a wide range of situations. Temperature control for the hotel room is also integrated, as is a “Do not disturb” function.

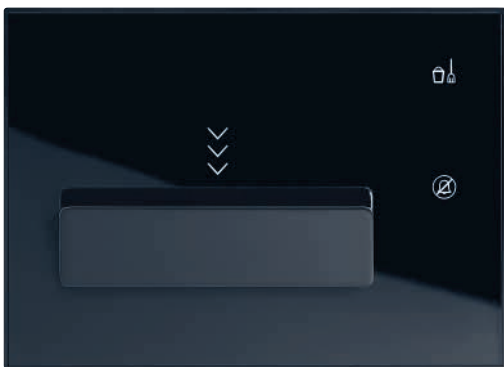


KEY CARD READER

The power in the room can be switched on with the hotel card. The “Make up room” and “Do not disturb” signs can also be activated from here.

EXTERNAL READER

For opening the door with the hotel card and to provide a bell function for visitors. It lets staff know the guest doesn’t want to be disturbed or that the room can be cleaned. Room number can be added.

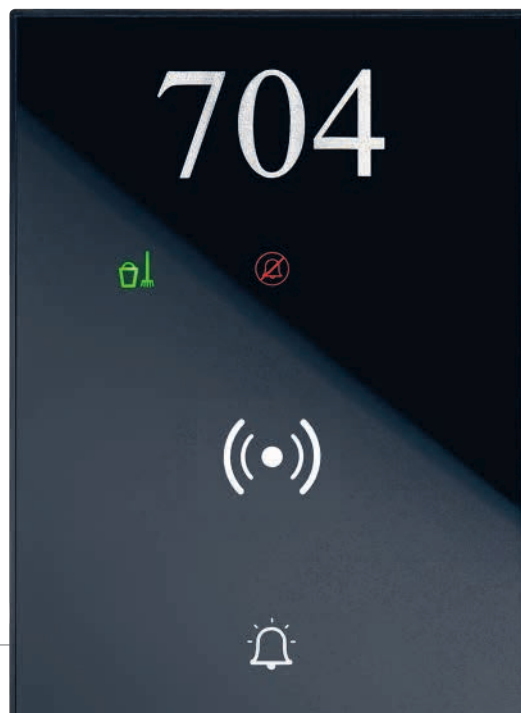


FIRST-CLASS SERVICE

THE PERSONAL TOUCH


With global hotel projects, it is absolutely critical to implement the individual corporate design. This is why Arteor is open to clients' design preferences. The range is flexible when it comes to functionality too, so Legrand works closely with architects and planning specialists to come up with the perfect bespoke solution.

A special configuration tool has been developed for quick and easy implementation of customer requirements.

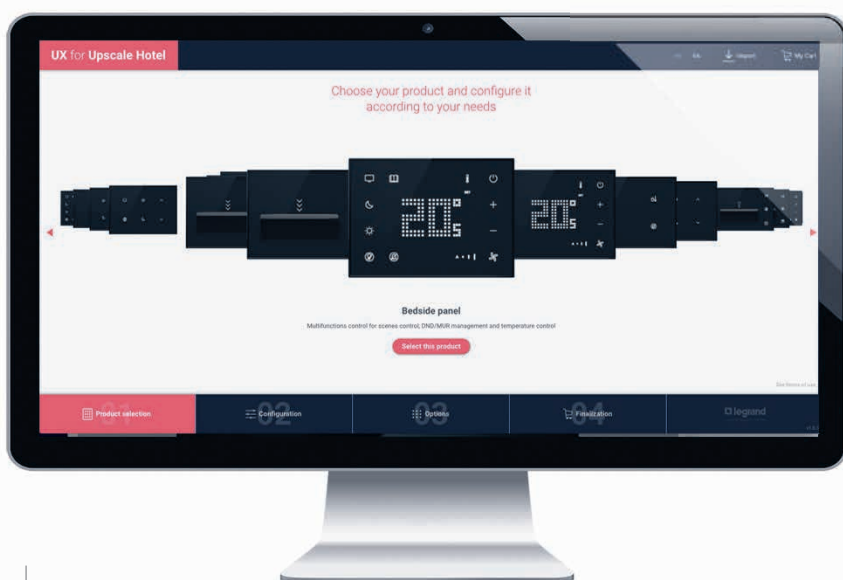

The configuration tool provides a convenient way of selecting the colour options for touch plates and frames, the icons and other forms of customisation.

Check out the configuration tool:
<https://www.uxforupscalehotel.legrand.com>

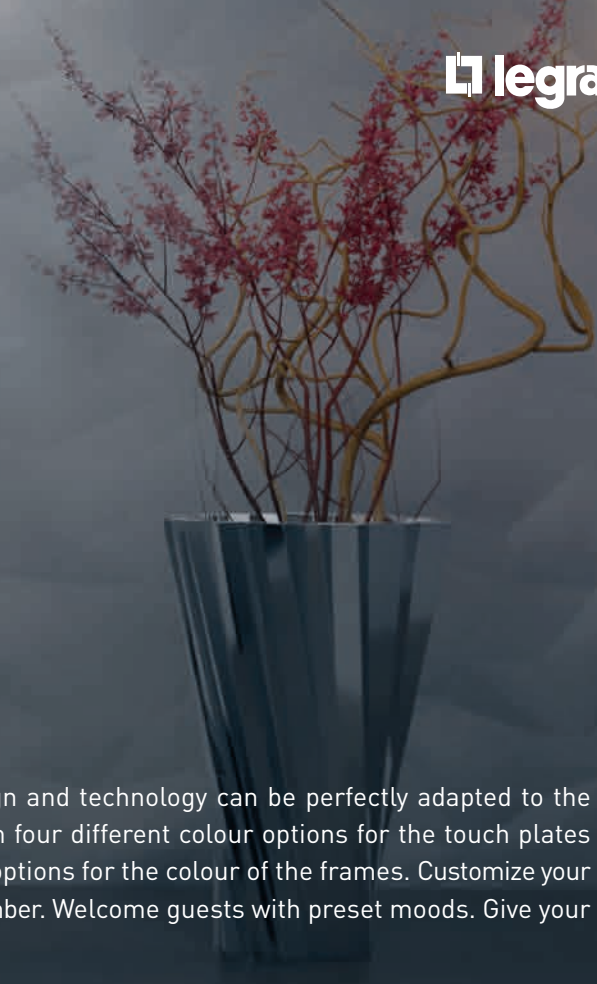

Products are made to measure which means that design and technology can be perfectly adapted to the corporate style and the users' preferences. Choose from four different colour options for the touch plates (White, Black, Light Grey and Dark Grey) and even more options for the colour of the frames. Customize your guests' experience by adding the hotel logo or the room number. Welcome guests with preset moods. Give your guests the five star treatment they deserve.



Touch plates available in four colours: Black, White, Light Grey and Dark Grey.



Choose between standard surface installation or fully recessed mounting, in-wall or integrated into furniture.

CATALOGUE



P. 60
Mechanical
switches




P. 65
Visual
indication



P. 71
British
standard
socket
outlets



P. 81
Rear pluggable
data sockets,
wiring splitters



P. 88
Support
frames



P. 98
Gateway kit



P. 104
Home system
management



P. 113
Energy management
and load shedding
management



P. 118
BUS
solutions

Arteor™ Wiring Devices

Arteor™ with Netatmo Connected home

Home Automation MyHOME_Up (BUS)

Hotel solutions



P. 61
Push-buttons



P. 62
Sensitive switches and motion sensors



P. 63
Dimmers



P. 66
Ventilation, heating and roller blinds control, RCBs and MCBs



P. 68
USB chargers and wireless power chargers



P. 70
Lighting control, emergency push-buttons



P. 70
DP switches, cooker control units



P. 72
Socket outlets with USB charger



P. 75
South African sockets



P. 78
Telephone and television sockets



P. 80
RJ 45 sockets



P. 82
USB data sockets



P. 84
Audio and video sockets



P. 86
Bluetooth sound diffusion and loudspeakers



P. 89
Ancillary mechanisms and blanking cover plates



P. 90
Mounting supports and mounting boxes



P. 92
Plates selection charts



P. 98
Connected light switches



P. 99
Connected socket outlets



P. 100
Connected curtain/roller blind switches



P. 101
Connected wireless controls and scene switches



P. 107
Control mechanisms, touch plates and scenario controllers



P. 108
Key cover selection charts



P. 110
Modular equipment for lighting control and automation



P. 112
BUS sensors



P. 114
Temperature control



P. 114
Common accessories



P. 115
Other devices



P. 120
UX for Upscale Hotels touch interfaces (BUS)



P. 122
KNX solutions



P. 123
Stand-alone hotel solutions

Arteor™ mechanical switches

square version




Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	Switches 10 AX - 250 V~	Pack	Cat.Nos	Switches 20 AX - 250 V~
10	5 720 04	1-way switch ○ White - 1 module	10	5 720 09	1-way switch ○ White - 1 module
10	5 725 04	● Magnesium - 1 module	10	5 725 09	● Magnesium - 1 module
10	5 700 04	● Champagne - 1 module	10	5 700 09	● Champagne - 1 module
10	5 710 04	● Soft Alu - 1 module	10	5 710 09	● Soft Alu - 1 module
10	5 724 50	● Red - 1 module	10	5 720 41	○ White - 2 modules
10	5 720 34	○ White - 2 modules	10	5 725 41	● Magnesium - 2 modules
10	5 725 34	● Magnesium - 2 modules	10	5 723 81	● Champagne - 2 modules
10	5 700 34	● Champagne - 2 modules	10	5 723 80	● Soft Alu - 2 modules
10	5 710 34	● Soft Alu - 2 modules	10	5 720 10	2-way switch ○ White - 1 module
10	5 720 05	○ White - 1 module	10	5 725 10	● Magnesium - 1 module
10	5 725 05	● Magnesium - 1 module	10	5 700 10	● Champagne - 1 module
10	5 700 05	● Champagne - 1 module	10	5 710 10	● Soft Alu - 1 module
10	5 710 05	● Soft Alu - 1 module	10	5 720 11	2-way switch with indicator To be equipped with LED (p. 65) ○ White - 1 module
10	5 720 35	○ White - 2 modules	5	5 725 11	● Magnesium - 1 module
10	5 725 35	● Magnesium - 2 modules	5	5 723 83	● Champagne - 1 module
10	5 700 35	● Champagne - 2 modules	5	5 723 82	● Soft Alu - 1 module
10	5 710 35	● Soft Alu - 2 modules	10	5 720 42	○ White - 2 modules
10	5 720 06	○ White - 1 module	5	5 725 42	● Magnesium - 2 modules
10	5 725 06	● Magnesium - 1 module	5	5 723 85	● Champagne - 2 modules
10	5 721 75	● Champagne - 1 module	5	5 723 84	● Soft Alu - 2 modules
10	5 721 74	● Soft Alu - 1 module	10	5 720 43	1-way switch - 3 gang ○ White - 2 modules
5	5 720 36	○ White - 2 modules	10	5 725 43	● Magnesium - 2 modules
5	5 725 36	● Magnesium - 2 modules	10	5 723 87	● Champagne - 2 modules
5	5 721 77	● Champagne - 2 modules	10	5 723 86	● Soft Alu - 2 modules
5	5 721 76	● Soft Alu - 2 modules	10	5 720 44	2 x 2-way switch + 1-way switch - 3 gang ○ White - 2 modules
5	5 720 37	○ White - 2 modules	10	5 725 44	● Magnesium - 2 modules
5	5 725 37	● Magnesium - 2 modules	10	5 723 89	● Champagne - 2 modules
5	5 720 08	○ White - 1 module	10	5 723 88	● Soft Alu - 2 modules
5	5 725 08	● Magnesium - 1 module	5	5 720 13	1-way double pole switch ○ White - 1 module
5	5 700 08	● Champagne - 1 module	5	5 725 13	● Magnesium - 1 module
5	5 710 08	● Soft Alu - 1 module	5	5 721 83	● Champagne - 1 module
10	5 720 38	○ White - 2 modules	5	5 721 82	● Soft Alu - 1 module
10	5 725 38	● Magnesium - 2 modules	5	5 724 51	● Red - 1 module
10	5 721 66	● Champagne - 2 modules	10	5 720 46	○ White - 2 modules
10	5 721 65	● Soft Alu - 2 modules	10	5 725 46	● Magnesium - 2 modules
10	5 720 40	Double pole switch ○ White - 2 modules	10	5 721 85	● Champagne - 2 modules
5	5 725 40	● Magnesium - 2 modules	10	5 721 84	● Soft Alu - 2 modules
5	5 721 79	● Champagne - 2 modules			
5	5 721 78	● Soft Alu - 2 modules			

Support frames and plates, **p. 92**



Arteor™ mechanical switches

square version (continued)



5 720 49



Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack Cat.Nos Switches 20 AX - 250 V~ (continued)

Pack	Cat.Nos	Switches 20 AX - 250 V~ (continued)
1-way double pole switch with indicator		
Red LED supplied		
5	5 720 14	○ White - 1 module
5	5 725 14	● Magnesium - 1 module
5	5 721 87	● Champagne - 1 module
5	5 721 86	● Soft Alu - 1 module
10	5 720 47	○ White - 2 modules
10	5 725 47	● Magnesium - 2 modules
10	5 721 89	● Champagne - 2 modules
10	5 721 88	● Soft Alu - 2 modules
1-way double pole switch with indicator and "WATER HEATER" marking		
Red LED supplied		
10	5 720 49	○ White - 2 modules
10	5 725 49	● Magnesium - 2 modules
10	5 721 91	● Champagne - 2 modules
10	5 721 90	● Soft Alu - 2 modules
2-way double pole switch		
10	5 720 48	○ White - 2 modules
10	5 725 48	● Magnesium - 2 modules
10	5 721 93	● Champagne - 2 modules
10	5 721 92	● Soft Alu - 2 modules

Arteor™ push-buttons

square version



5 700 00

5 710 00

5 720 15

5 725 16

5 725 33




Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92 to 97)

Pack Cat.Nos Push-buttons 6 A - 250 V~

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
1-way push-button		
10	5 720 00	○ White - 1 module
10	5 725 00	● Magnesium - 1 module
10	5 700 00	● Champagne - 1 module
10	5 710 00	● Soft Alu - 1 module
10	5 720 30	○ White - 2 modules
10	5 725 30	● Magnesium - 2 modules
10	5 730 35	● Champagne - 2 modules
10	5 730 34	● Soft Alu - 2 modules
1-way push-button with bell symbol		
5	5 720 15	○ White - 1 module
5	5 725 15	● Magnesium - 1 module
5	5 730 37	● Champagne - 1 module
5	5 730 36	● Soft Alu - 1 module
5	5 720 56	○ White - 2 modules
5	5 725 56	● Magnesium - 2 modules
5	5 730 39	● Champagne - 2 modules
5	5 730 38	● Soft Alu - 2 modules
1-way push-button with locator and bell symbol		
Equipped with blue LED		
5	5 720 16	○ White - 1 module
5	5 725 16	● Magnesium - 1 module
5	5 730 41	● Champagne - 1 module
5	5 730 40	● Soft Alu - 1 module
2-way push-button		
10	5 720 01	○ White - 1 module
5	5 725 01	● Magnesium - 1 module
5	5 730 43	● Champagne - 1 module
5	5 730 42	● Soft Alu - 1 module
10	5 720 31	○ White - 2 modules
5	5 725 31	● Magnesium - 2 modules
5	5 730 45	● Champagne - 2 modules
5	5 730 44	● Soft Alu - 2 modules
2-way push-button with locator		
Equipped with blue LED		
10	5 720 02	○ White - 1 module
10	5 725 02	● Magnesium - 1 module
10	5 730 47	● Champagne - 1 module
10	5 730 46	● Soft Alu - 1 module
10	5 720 32	○ White - 2 modules
5	5 725 32	● Magnesium - 2 modules
5	5 730 49	● Champagne - 2 modules
5	5 730 48	● Soft Alu - 2 modules
2-way push-button with label-holder		
10	5 720 03	○ White - 1 module
5	5 725 03	● Magnesium - 1 module
10	5 720 33	○ White - 2 modules
10	5 725 33	● Magnesium - 2 modules
10	5 700 33	● Champagne - 2 modules
10	5 710 33	● Soft Alu - 2 modules

Arteor™ electronic switches and motion sensors



5 734 55



5 740 47



5 740 05




5 740 09

Support frame and plate selection charts **p. 92**
Load selection charts **p. 64**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92 to 97)

Pack	Cat.Nos	Sensitive switches - 100/240 V~
1	5 720 51	<p>For controlling light sources by simply passing the hand in front of the switch (distance 5 mm) Up to 5 sensitive switches can be combined to control the same lighting circuit Supplied with LED indicator light</p> <p>Square version</p> <p>○ White - 2 modules ● Magnesium - 2 modules</p>
1	5 734 55	
1		<p>Motion sensors</p> <p>Measurement of luminosity threshold Adjustment of luminosity threshold and time delay Max. lux and min. time delay factory pre-set Recommended fixing height: 1 m IR detection 180° Adjustable luminosity threshold: 5 to 1275 lux Installation in box min. depth 40 mm recommended 2 modules Range 8 m</p> <p>With neutral, 3-wire - 2000 W</p> <p>Operates: - 2000 W incandescent and halogen lamps 230 V~ - 1000 VA ELV halogen lamps with ferromagnetic or electronic transformer - 500 VA compact fluorescent lamps - 0 to 250 W for LEDs Settings modified on the device via thumbwheel or configuration tool Cat.Nos 0 882 30 and 0 882 35 Time delay adjustable from 5 s to 30 min</p> <p>○ White ● Magnesium ● Champagne ● Soft Alu</p> <p>With neutral, 3-wire - 400 W</p> <p>Load selection charts (p. 64) Only 1 motion sensor per lighting circuit No possibility to add a push button to control also the lighting circuit Time delay adjustable from 10 s to 10 min Consumption 0.55 W on standby</p>
1	5 740 47	
1	5 740 97	
1	5 741 41	
1	5 741 40	
1	5 740 05	<p>○ White ● Magnesium</p>
1	5 740 55	

Pack	Cat.Nos	Motion sensors (continued)
1	5 740 09	<p>Without neutral, 2-wire Load selection charts (p. 64) Possibility to put 3 motion sensors in parallel No possibility to add a push button to control also the lighting circuit Time delay adjustable from 10 s to 10 min Consumption 0.02 W on standby</p> <p>○ White ● Magnesium</p>
1	5 740 59	
1	0 882 35	<p>Configuration tools for motion sensors</p> <p>All sensors are supplied with factory settings: - 300 lux light level threshold for surface and flush mounting sensors - 15-minute time delay and walkthrough function activated The configuration tools are used to adjust these presets and the detection sensitivity. Step programming on preset buttons Digital programming to one decimal place on the digital screen. Instant programming control Used to display the parameters of each sensor Option to store settings in the memory and to apply them to other sensors Standard preset configurations for each room type (office, hallway, etc.) according to EN 12 464</p>
1	0 882 30	
1	0 401 49	<p>Active power compensator</p> <p>Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W</p>

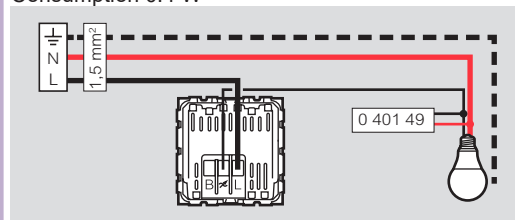

Arteor™ dimmers

square version



Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92 to 97)

Pack	Cat.Nos	Leading edge dimmers
		Without neutral, 2-wire
1	5 722 13	Rotary dimmer - 400 W <ul style="list-style-type: none"> ○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
1	5 727 13	
1	5 700 53	
1	5 710 53	
		Rotary dimmer - 1000 W To be installed alone in a 3 module box (or 1 gang BS) with a 3-module support frame and a 2-module plate For lamps: - 60-1000 W (230 V) - 60-500 W (127 V) for incandescent and halogen lamps - 60-600 VA (230 V) - 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour - 60-1000 VA (230 V) - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers
1	5 735 01	<ul style="list-style-type: none"> ○ White - 2 modules ● Magnesium - 2 modules
1	5 737 01	
		Universal dimmers
		Without neutral, 2 wires
		Push-button dimmer for all types of lamps:
		- Dimmable LEDs: 75 W
		- Dimmable compact fluorescent lamps: 75 W
		- Halogen with transformer: 400 VA
		- Fluorescent tube: 200 VA
		- Halogen 230 V and incandescent: 400 W
		Can be associated with one or several push-buttons without neon, for ON/OFF or dimming control
		Lights come on again at the same lighting level as before they were last switched off
1	5 722 39	<ul style="list-style-type: none"> ○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
1	5 727 39	
1	5 729 37	
1	5 729 36	
		Dimmers 1-10 V
		Push-button dimmer for ballasts 1-10 V
1	5 722 38	<ul style="list-style-type: none"> ○ White - 2 modules ● Magnesium - 2 modules ● Champagne - 2 modules ● Soft Alu - 2 modules
1	5 727 38	
1	5 729 39	
1	5 729 38	

Arteor™ load selection charts

Load selection charts

	Cat.Nos	Universal							
		Leading edge				Trailing edge			
		Incandescent lamp		Halogen lamp		ELV halogen with ferromagnetic transformer		ELV halogen with electronic transformer	
		110 V~	230 V~	110 V~	230 V~	110 V~	230 V~	110 V~	230 V~
Sensitive switches	5 720 51 5 734 55 5 725 51 5 736 55	500 W	1000 W	500 W	1000 W	250 VA	500 VA	250 VA	500 VA
Dimmers	5 722 13 5 727 13 5 700 53 5 710 53	200 W	400 W	200 W	400 W	200 VA	400 VA	-	-
	5 735 01 5 737 01	500 W	1000 W	500 W	1000 W	500 VA	1000 VA	300 VA	600 VA
	5 722 39 5 727 39 5 729 37 5 729 36 5 743 19 5 743 39 5 743 10	200 W	400 W	200 W	400 W	200 VA	400 VA	200 VA	400 VA
Motion sensors	5 740 47 5 740 97 5 741 41 5 741 40	1000 W	2000 W	1000 W	2000 W	500 VA	1000 VA	500 VA	1000 VA
	5 740 05 5 740 55	-	400 W	-	400 W	-	2000 VA	-	200 VA
	5 740 09 5 740 59	125 W	250 W	125 W	250 W	125 VA	250 VA	125 VA	250 VA

	Cat.Nos	Universal					
		Fluorescent tube		Compact fluorescent lamp		LED	
		110 V~	230 V~	110 V~	230 V~	110 V~	230 V~
Sensitive switches	5 720 51 5 734 55 5 725 51 5 736 55	250 VA	500 VA	250 VA	500 VA	250 VA	500 VA
Dimmers	5 722 39 5 727 39 5 729 37 5 729 36 5 743 19 5 743 39 5 743 10	100 VA	200 VA	Dimmable 37 W 10 lamps max	Dimmable 75 W 10 lamps max	Dimmable 37 W 10 lamps max	Dimmable 75 W 10 lamps max
Motion sensors	5 740 47 5 740 97 5 741 41 5 741 40	300 W	720 W	250 VA	500 VA	250 VA	500 VA
	5 740 05 5 740 55	-	150 VA	-	50 W	-	50 W
	5 740 09 5 740 59	125 VA	250 VA	50 W	100 W	50 W	100 W

	Cat.Nos	Ballasts 1-10 V		Reducer motor for shutters	
		110 V~	230 V~	110 V~	230 V~
Sensitive switches	5 720 51 5 734 55 5 725 51 5 736 55	-	-	50 VA	100 VA
Dimmers	5 722 38 5 727 38 5 729 39 5 729 38 5 743 18 5 743 38	300 VA 40 mA	600 VA 40 mA	-	-

Arteor™

visual indication



5 722 21




5 727 26




5 724 52



5 727 34



Lamp used
as a torch

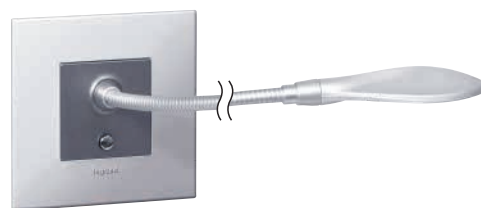

5 727 57 + plate 5 713 02



Support frame and plate selection charts **p. 92**

Mechanisms supplied with square rocker plates, to be equipped with support frames (p. 88) and plates (p. 92 to 97)

Pack	Cat.Nos	Skirting lights
		For installation close to obstacles 2 modules
		Standard
		With LED 230 V~ - 0.2 or 1 W
1	5 722 21	○ White
1	5 740 82	● Magnesium
1	5 740 83	● Champagne
1	5 740 80	● Soft Alu
		With motion detector 100-240 V~
		With IR detection cell and LED
		When a person passes, the mechanism detects the presence and lights the obstacle
		The function is equipped with an audible signal that can be disengaged
1	5 722 26	○ White
1	5 727 26	● Magnesium
1	5 729 45	● Champagne
1	5 729 44	● Soft Alu
		Self-contained plug-in lights
		230 V~ power supply
		In the event of a mains failure, the lamp lights up automatically
		When removed from its socket, the lamp lights up automatically and can be used as a torch (with O/I button)
		Lamp can be removed simply by pushing
		Standby power: 24 hrs in use
1	5 722 34	○ White
1	5 727 34	● Magnesium

Pack	Cat.Nos	Illuminated lighting unit
		230 V~ - 1 W
		Supplied with 4 coloured labels
10	5 724 52	○ White

Pack	Cat.Nos	Overdoor lighting units
		Supplied with diffusers and LED
		2 modules
10	5 724 53	○ White with red diffuser
10	5 722 23	○ White with white diffuser

Pack	Cat.Nos	Lamps
		For locator switch
10	5 724 56	LED 230 V - blue
		For indicator switch
10	5 724 55	LED 230 V - red
10	5 724 57	LED 24 V - red
10	5 724 54	LED 12 V - red

Pack	Cat.Nos	Reading lights
		Fitted with maintenance-free LEDs
		LED colours: 3000 K (neutral white)
		230 V~ power supply - energy class A
		Screw terminals
		For installation in the bedhead
		Offers directional lighting
		Equipped with a flexible cable so the head can swivel
		Built-in dimmer
		Consumption 3.3 W
		Luminous flux 110 lumen (equivalent to 15 W incandescent)
		Service life 40000 hours
		For installation in box depth 40 mm min.
		2 modules
		Square version
1	5 722 57	○ White
1	5 727 57	● Magnesium



0 490 36



5 722 18



5 722 03



5 710 52



5 727 20


Support frame and plate selection charts **p. 92**

Mechanisms supplied with square rocker plates, to be equipped with support frames (p. 88) and plates (p. 92 to 97)

Pack	Cat.Nos	Smarter connected thermostat
		Allows you to adjust and monitor the temperature in the rooms precisely and accurately; all the programming and most of the functions are performed simply and intuitively using the dedicated APP. Thanks to its Wi-Fi connection, Smarter can be programmed and controlled remotely; it can also display the temperature and humidity measured in the room. The temperature level can be set locally for manual operation and the Boost mode can be activated. The Boost forces the switching on of the system for a limited time (30, 60 or 90 minutes) independent of the measured and programmed temperature
		- 100 - 240 V~, 50/60 Hz power supply;
		- 2 W max absorption
		- maximum cable section 1 x 1.5 mm ²
		- temperature measurement 5 - 40 °C
		- temperature set-point 5 - 40 °C
		- increase of 0.5 °C
		- 1-contact output in switching free of potential 5(2)A
		2 modules
1	0 490 36	Flush-mounting
1	0 490 37	Surface-mounting

Pack	Cat.Nos	Thermostats
		Electronic room thermostat
		Control knob with index and adjustable segments for min. and max. settings
		Adjustable range from 5 °C to 30 °C (+/- 0.5 °C)
		Power supply: 230 V~ - 50/60 Hz
		One potential free changeover contact output
		Suitable for controlling heated ceilings and underfloor heating
		- LV use breaking capacity:
		8 A - 250 V~ - resistive inductive circuit
		2 A - 250 V~ - inductive circuit
		- ELV use breaking capacity:
		12 to 48 V~ - 12 to 24 V=, from 1 mA min. to 500 mA max.
		2 modules
1	5 722 03	○ White
1	5 727 03	● Magnesium
1	5 727 06	● Champagne
1	5 727 05	● Soft Alu
		Thermostat for electric floor heating
		With one potential free N/O contact and LED
		16 A - 230 V~
		Adjustable range from 7 °C to 40 °C
		2 modules
1	5 722 63	○ White
1	5 727 63	● Magnesium
1	5 727 08	● Champagne
1	5 727 07	● Soft Alu

Pack	Cat.Nos	Fan controllers
		2 modules
		AC speed control - 4 positions
1	5 722 17	○ White
1	5 727 17	● Magnesium
1	5 727 87	● Champagne
1	5 727 86	● Soft Alu
		Rotary speed controller for fan
		Operates 40 to 400 VA limit switch
		For progressive speed control of ceiling fan
1	5 722 18	○ White
1	5 727 18	● Magnesium
1	5 727 97	● Champagne
1	5 727 96	● Soft Alu
		Fan step regulator - 100 W
5	5 722 15	○ White
5	5 727 15	● Magnesium
5	5 727 99	● Champagne
5	5 727 98	● Soft Alu
		Curtain switches
		1 module
		Curtain switch centre off
5	5 722 02	○ White
5	5 727 02	● Magnesium
5	5 700 52	● Champagne
5	5 710 52	● Soft Alu
		Curtain switch centre retract
5	5 722 01	○ White
5	5 727 01	● Magnesium
5	5 727 55	● Champagne
5	5 727 54	● Soft Alu
		Electric roller blind controllers - 250 V~
		For control via automatic box (N/O mechanism)
		Double push-button - 10 A
		2 modules
10	5 722 19	○ White
10	5 727 19	● Magnesium
10	5 729 43	● Champagne
10	5 729 42	● Soft Alu
		For direct control of a motor (mechanism with fixed positions)
		Double push-button - 10 A
		2 modules
10	5 722 20	○ White
10	5 727 20	● Magnesium
10	5 700 54	● Champagne
10	5 710 54	● Soft Alu


Products to be submitted to local tests to ensure a perfect functioning
Please contact your local agency

Arteor™

RCBO and MCB



5 723 60





5 723 61



Support frame and plate selection charts **p. 92**

Mechanisms supplied with square rocker plates, to be equipped with support frames (p. 88) and plates (p. 92 to 97)

Pack	Cat. Nos	RCBO - 16 A - 230 V~
1	5 723 60	<p>Single pole + Neutral - 30 mA - 2 modules</p> <p>The RCBO is used to protect people (premises with a conductive floor, presence of water, etc...) against direct contact with live parts or leakages to earth</p> <p>With test button</p> <p>○ White</p> 
1	5 723 61	<p>Thermal magnetic proximity MCB</p> <p>Single pole + Neutral - 230 V~ - 16 A</p> <p>Used for local protection of part in a circuit (e.g. 2P+E socket) against overloads and short-circuits</p> <p>Main protection being close to the user plus discriminating allows immediate reset</p> <p>Can also be used as a local consumption limiter (depending on its rating)</p> <p>Breaking capacity: 3000 A - 2 modules</p> <p>○ White</p> 

Arteor™


proximity MCBs

Example of use of an RCBO

For use in addition to a DIN rail mounting RCBO

In the event of a fault, allows the user to reset the RCBO locally (on the work surface), without interrupting service to another group of sockets

- 30 mA sensitivity ensures the safety of persons

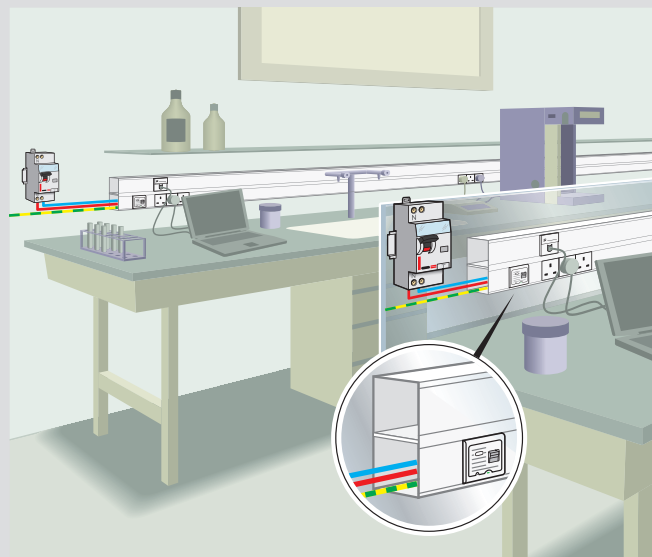

Selectivity

RCBOs or upstream MCBs		DX³ 4500 - 6 kA / DX³ 6000 - 10 kA DX³ 10000 - 16 kA / Ph + N, 1P, 2P, 3P, 4P curve C							
		16 A	20 A	25 A	32 A	40 A	50 A	63 A	
Downstream MCBs	Arteor 1P+N MCB and RCBO	10 A	120	150	187	240	300	375	472
		16 A	-	150	187	240	300	375	472

RCBOs or upstream MCBs		DX ³ 10000 - 16 kA (80 to 125 A) DX ³ 25 kA, 36 kA, 50 kA curve C									
		16 A	20 A	25 A	32 A	40 A	50 A	63 A	80 A	100 A	125 A
Downstream MCBs	10 A	120	150	210	500	700	1000	1800	3000	5000	T
	16 A		150	187	300	500	700	1300	2000	3600	5500




Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	USB Type-A chargers
		For recharging portable devices Conform to IEC 60950 Consumption in passive mode < 0.07 W 2P+E tap-off connection via 2 x 2.5 mm ² screw terminals Supplied without cord Double USB sockets - 5 V_{DC} - 2.4 A - 12 W For fast charging of smartphones and tablet PC 2 modules 5 720 78 ¹ 1 5 725 78 ¹ 1 5 710 76 ¹ 1 5 700 76 ¹ ○ White ● Magnesium ● Champagne ● Soft Alu Single USB sockets - 5 V_{DC} - 1.1 A - 5.5 W For Smartphone or Powerbank 1 module 10 5 720 71 10 5 725 71 10 5 710 75 10 5 700 75 ○ White ● Magnesium ● Champagne ● Soft Alu
		USB Type-C chargers Used for charging the battery of a portable device without a mobile charger with USB Type-C plug Standby consumption < 0.07 W Conform to IEC 60950 Supplied without cord 1 USB Type-A + 1 USB Type-C - 230 V - 5 V_{DC} - 3 A - 15 W 2 modules 1 N 5 720 77 1 5 725 77 1 5 710 77 1 5 700 77 ○ White ● Magnesium ● Champagne ● Soft Alu 2 USB Type-C - 230 V - 5 V_{DC} - 3 A - 15 W 2 modules 1 5 720 72 1 5 725 72 1 5 710 78 1 5 700 78 ○ White ● Magnesium ● Champagne ● Soft Alu 1 USB Type-C - 230 V - 5 V_{DC} - 1.5 A - 7.5 W 1 module 10 5 724 84 10 5 733 94 10 5 710 79 10 5 700 79 ○ White ● Magnesium ● Champagne ● Soft Alu

Type-C connector characteristics

USB Type-C : new miniaturised version of the traditional USB connector (Type-A)



Reversible : simplified connection.
For fast charging of devices and high-speed Data, Audio and Video transfers

USB Type-C standardisation

The European Commission and major manufacturers of multimedia devices (smartphones, tablets and laptops) have signed an M.o.U. (memorandum of understanding) aiming to standardise equipment and use of Type-C connectors.
7 leading manufacturers are signatories to the agreement guaranteeing compatibility of their devices with USB Type-C chargers: Samsung, Apple, LG, Google, Sony, Motorola, Lenovo.
Standardisation :
- simplifies connection for users
- optimises charging performance and ensures compatibility
- restricts the need for multiple mobile chargers

Multipurpose cord

The USB Type-C connector aims to replace several connectors so users have a truly multipurpose cord.

Energy Data	USB Type-A		
Telephone	Micro USB		
	Lightning		
	HDMI		
Video image	Display Port		
	VGA HD15		
Audio	3.5 Jack		

USB Type-C single connector

Why install a USB Type-C charger ?

- Latest generation smartphones and tablets are natively equipped with a Type-C port
- As the Type-C connector becomes the universal port, the Type-C cord will enable a multitude of applications (charging and data transfer)
- Delivers up to 15 W to optimise charging
- Environmentally friendly: standby power consumption of 0.07 W Level VI on the TUV scale (highest level)

Arteor™

wireless power chargers



0 775 80 supplied with sticker

0 775 99

5 720 76

Wireless power chargers for fast charging of a smartphone with a Qi receiver
Power supply standby mode consumption < 0.07%
Conform to the Qi WPC standard (Wireless Power Consortium): certified for professional Qi 1.2.3 projects
Conform to EN 62479 standard (EMF emissions)
Conform to ICNIRP specifications (health protection)
Do not interfere with other wireless signals (Zigbee, TNT, GSM, 4G, etc)

Pack	Cat.Nos	Qi wireless chargers - for integration into furniture
		<p>Specially designed for mounting horizontally on furniture. For meeting rooms, offices, public areas, etc 80 mm drilling diameter, Aluminium colour Extra-slim with thickness < 1.5 mm Supplied with identification sticker diameter 85/110 mm, 2.5 m cord, fixing base and cable ties 110-240 V universal power supply Plugs conforming to European, BS, US, Australian/ Chinese standards To be installed using a hole saw diameter 80 mm (Cat.No 0 885 08)</p>
1	0 775 80	5 W - IP 44 / IK 08 charger
1	0 776 00L	15 W - IP 44 / IK 08 charger



Pack	Cat.Nos	Flush-mounted wireless chargers - for public areas
		<p>1 A - 5 V/5 W wireless charger. Specially designed for public buildings, passageways or transit areas, swimming pools, etc. IK 08 - IP 66 - Class II SELV Comes with 2 induction antennae for fast smartphone charging. Recognition area: 50 x 80 mm Plate at an angle of 10° with non-slip coating to hold the terminal safely in place during charging Screws onto flush-mounting box with 60 mm fixing centres, min. depth 40 mm, French, German or British standard. Can also be fixed in at 4 points. Can be mounted on rectangular boxes and outdoors 110/230 VA Phase + Neutral power supply Mechanism supplied with cover plate, attached with 2 Torx screws at the side</p>
1	0 775 99	<p>Aluminium colour Dimensions: 141 x 95 x 51 mm 2 x 2.5 mm² terminals</p>



Pack	Cat.Nos	Wireless charger + Type-A USB - Arteor version
		<p>1 A - 5 V/5 W charger with one 2.4 A/12 W USB port to power a second device Specially designed for work areas For installation in flush-mounting box, surface mounting box, workstation kit, column module, multi-outlet extension for offices, etc To be fitted with a support and a plate depending on the selection of the wiring accessories ranges Comes with 2 induction antennae for fast intuitive smartphone charging. Recognition area: 50 x 80 mm Plate at an angle of 10° with non-slip coating to hold the terminal safely in place during charging Dimensions: 136.5 x 70 x 56.5 mm Anti-theft lock function Suitable for horizontal multi-gang mounting Metallic finishing plate 2 x 2.5 mm² terminals</p>
1	5 720 76	



Arteor™

wireless power chargers

Wireless power charging

A Legrand innovation for easy charging


Using wireless energy transfer
No need for cords and connectors

An open international standard: Qi

Wireless Power Consortium: 750 members, ensuring interoperability with induction-compatible phones
Qi: global standard adopted by vehicle manufacturers and cafés/hotels/restaurants
Products certified for professional Qi 1.2.3 projects

Ergonomically designed to suit different environments


Horizontal charging on furniture

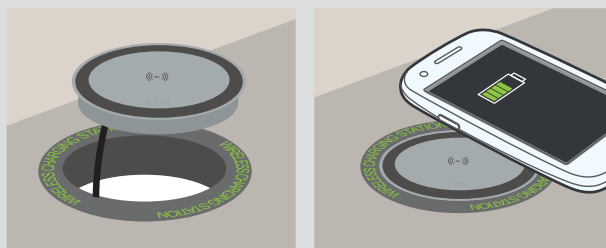

Insertion in an 80 mm diameter cut-out / Fixed into furniture
External power supply with 2.5 m cord

Vertical charging on a wall in public areas (semi-flush-mounted)


Ideal for indoor or outdoor locations

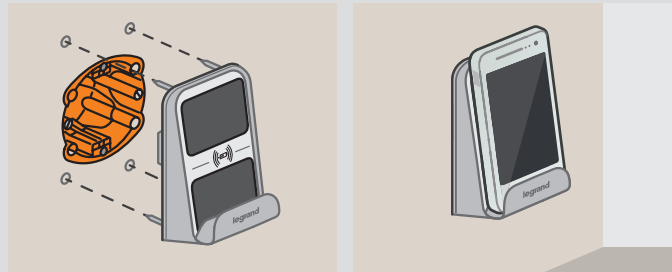

Excellent resistance to impacts (IK 08) and adverse weather conditions (IP 66)
Can be fixed directly on the flush-mounting box or for extra strength drilled with anchor bolts

Charging in Arteor environment

With induction and 2.4 A / 12 W USB Type-A socket

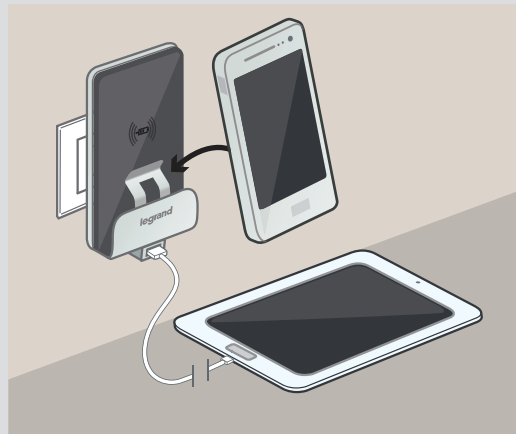



5 720 55



5 723 63

Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	Time delay switches
		Interference suppression conforming to standard EN 55022 For timer control of a circuit with the following loads: - 1000 W incandescent and halogen 230 V~ - 2300 W resistive (heating) - 400 VA fluorescent and ELV halogen Adjustable from 25 s to 15 min It is possible to install a number of timer switches in parallel on the same circuit With integrated LED 2-wire installation in box min. depth 40 mm 2 modules
1	5 720 55	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 740 84	
1	5 741 38	
1	5 741 37	

Pack	Cat.Nos	Single pole latching relays 10 A - 250 V~
		Used to bring functions with low breaking capacity close to the application Resistive: 3000 W Incandescent: 1800 W LV halogen: 1800 W Fluorescent: 400 VA Motors (roller blind type): 530 W 2 modules
1	5 722 27	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 727 27	
1	5 729 47	
1	5 729 46	

Pack	Cat.Nos	Emergency stop mushroom head push-buttons 10 A - 250 V~
		N/O + N/C 2 modules
		With key Unlock with RONIS key no. 601
1	5 723 63	<ul style="list-style-type: none"> ● Yellow/red
		1/4 turn 1/4 turn unlocking
1	5 723 62	<ul style="list-style-type: none"> ● Yellow/red



5 720 87



5 720 88

Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with plate (p. 92)
Support frame not needed

Pack	Cat.Nos	Double pole switches 40 A - 250 V~
		Conform to EN 60669-1: 2000 and SANS 164-1 Captive terminal screws For flush-mounting box to be min. 48 mm deep Use US plate 4" x 4" - 2 modules
		Double pole switch
5	5 720 81	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
5	5 725 81	
5	5 721 95	
5	5 721 94	

Pack	Cat.Nos	Double pole switch + neon
5	5 720 82	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
5	5 725 82	
5	5 721 97	
5	5 721 96	

Pack	Cat.Nos	Double pole switches 45 A - 250 V~
		Conform to EN 60669-1: 2000 Captive terminal screws For flush-mounting box to be min. 48 mm deep
		Double pole switch + neon - 2 gang Use BS plate 3 modules
5	5 720 80	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
5	5 725 80	
5	5 724 92	
5	5 724 85	

Pack	Cat.Nos	Double pole switch + neon - 1 gang
		Use BS plate 2 modules
5	5 720 87	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
5	5 725 87	
5	5 721 99	
5	5 721 98	

Pack	Cat.Nos	Cooker control unit 250 V~
		Conform to BS 4177: 1992 45 A double pole switch + 13 A double pole switched socket outlet Use special plate Cat. No 5 751 50
5	5 720 88	<ul style="list-style-type: none"> ○ White

Arteor™


British standard socket outlets



5 721 43



5 710 48

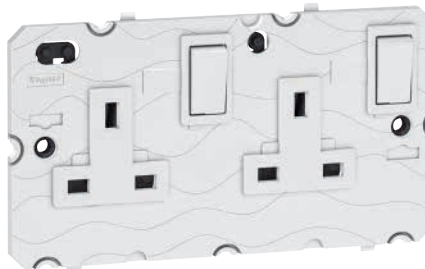

5 721 49



5 726 50

Plate selection charts p. 92

Mechanisms supplied with rocker plates, to be equipped with special plates (p. 92)
Support frame not needed

Pack Cat.Nos Single pole socket outlets 13 A - 250 V~

		Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates (p. 92)
		2P+E switched - 1 gang
10	5 721 43	○ White
10	5 726 43	● Magnesium
10	5 700 48	● Champagne
10	5 710 48	● Soft Alu
		2P+E switched + neon - 1 gang
10	5 721 44	○ White
10	5 726 44	● Magnesium
10	5 724 45	● Champagne
10	5 724 44	● Soft Alu
		2P+E switched - 2 gang
5	5 721 45	○ White
5	5 726 45	● Magnesium
5	5 700 49	● Champagne
5	5 710 49	● Soft Alu
		2P+E switched + neon - 2 gang
5	5 721 46	○ White
5	5 726 46	● Magnesium
5	5 724 47	● Champagne
5	5 724 46	● Soft Alu

Pack Cat.Nos Double pole socket outlets 13 A - 250 V~

		Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates (p. 92)
		2P+E switched - 1 gang
5	5 721 47	○ White
5	5 726 47	● Magnesium
5	5 724 49	● Champagne
5	5 724 48	● Soft Alu
		2P+E switched - 2 gang
5	5 721 49	○ White
5	5 726 49	● Magnesium
5	5 710 70	● Champagne
5	5 700 70	● Soft Alu
5	5 721 41	● Red for standard and clean earth applications Non standard pin configuration

Pack Cat.Nos Double pole socket outlets 5 A - 250 V~

		Shuttered for child safety Conform to BS 546 Use special plates (p. 92)
		2P+E switched - 1 gang
10	5 721 40	○ White
10	5 726 40	● Magnesium
10	5 727 58	● Champagne
10	5 727 21	● Soft Alu
		Fused connection units
		Double pole fused 13 A (fuse supplied) Flex outlet knockout and cord grip Captive fuse carrier (padlockable) Captive terminal screws Conform to BS 1363: part 4 Use special plates (p. 92)
		Switched
5	5 721 50	○ White
5	5 726 50	● Magnesium
5	5 726 75	● Champagne
5	5 726 74	● Soft Alu
		Switched + neon
5	5 721 51	○ White
5	5 726 51	● Magnesium
5	5 726 77	● Champagne
5	5 726 76	● Soft Alu
		Unswitched
10	5 721 57	○ White
10	5 726 57	● Magnesium
10	5 726 79	● Champagne
10	5 726 78	● Soft Alu



5 721 56 + 5 751 11



5 726 29 + 5 751 12












5 726 58



5 721 42 + 5 751 17

Mechanisms supplied with rocker plates, to be equipped with special plates
Support frame not needed

Pack	Cat.Nos	British standard socket outlets - 13 A - 250 V~ with USB charger
1	5 721 56	1 gang single pole switched USB Type-A 2.4 A - 5 V_{DC} - 12 W Consumption in passive mode < 0.08 W  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 726 56	
1	5 710 80	
1	5 700 80	
1	5 721 29	1 gang single pole switched USB Type-C 3 A - 5 V_{DC} - 15 W Consumption in passive mode < 0.08 W  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 726 29	
1	5 722 29	
1	5 722 49	
1	5 721 58	1 gang single pole unswitched USB Type-A 2.4 A - 5 V_{DC} - 12 W Consumption in passive mode < 0.08 W  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 726 58	
1	5 710 82	
1	5 700 82	
1	5 721 27	1 gang single pole unswitched USB Type-C 3 A - 5 V_{DC} - 15 W Consumption in passive mode < 0.08 W  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 726 27	
1	5 722 28	
1	5 722 58	
1	5 721 42	2 gang single pole switched USB Type-A + Type-C 3 A - 5 V_{DC} - 15 W Consumption in passive mode < 0.08 W  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 726 42	
1	5 710 81	
1	5 700 81	

Pack	Cat.Nos	Plates for British standard socket outlets - 13 A - 250 V~ with USB charger
5	5 751 11	For 1 gang single pole switched  <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze ● Brushed Metal - Stainless Steel
5	5 751 34	
5	5 751 33	
5	5 751 35	
5	5 751 36	
5	5 751 37	
1	5 751 12	For 1 gang single pole unswitched  <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze ● Brushed Metal - Stainless Steel
5	5 751 13	
5	5 751 89	
5	5 751 88	
5	5 751 93	
5	5 751 94	
5	5 751 95	For 2 gang single pole switched  <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze ● Brushed Metal - Stainless Steel
1	5 751 14	
5	5 751 17	
5	5 751 52	
5	5 751 51	For 2 gang single pole unswitched  <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze ● Brushed Metal - Stainless Steel
5	5 751 53	
5	5 751 54	
5	5 751 55	
1	5 751 18	

Arteor™

multistandard socket outlets with USB charger



5 721 38 + 5 751 10




5 721 39 + 5 751 70

Mechanisms supplied with rocker plates, to be equipped with special plates
Support frame not needed
















Pack	Cat.Nos	Multistandard switched socket outlets 16 A - 250 V~ / 15 A - 127 V~ with USB charger	
		Shuttered for child safety	
		2P+E - 1 gang	
		USB Type-A 2.4 A - 5 V_{DC} - 12 W	
		Consumption in passive mode < 0.08 W	
1	5 721 38		○ White
1	5 726 38		● Magnesium
1	5 710 83		● Champagne
1	5 700 83		● Soft Alu
		2P+E - 1 gang	
		USB Type-C 3 A - 5 V_{DC} - 15 W	
		Consumption in passive mode < 0.08 W	
1	5 721 62		○ White
1	5 726 62		● Magnesium
1	5 722 62		● Champagne
1	5 722 64		● Soft Alu
		2 x 2P+E - 2 gang	
		USB Type-A + Type-C 3 A - 5 V_{DC} - 15 W	
		Consumption in passive mode < 0.08 W	
1	5 721 39		○ White
1	5 726 39		● Magnesium
1	5 710 84		● Champagne
1	5 700 84		● Soft Alu

Pack	Cat.Nos	Special plates for Arteor multistandard socket outlets with USB charger	
		For 1 gang switched mechanism	
5	5 751 10		○ Neutral - White
5	5 751 44		● Soft Alu
5	5 751 43		● Graphite
5	5 751 45		● Magnesium
5	5 751 46		● Champagne
5	5 751 47		● Dark Bronze
1	5 751 16		● Brushed Metal - Stainless Steel
		For 2 gang switched mechanism	
5	5 751 70		○ Neutral - White
5	5 751 72		● Soft Alu
5	5 751 71		● Graphite
5	5 751 73		● Magnesium
5	5 751 74		● Champagne
5	5 751 75		● Dark Bronze
1	5 751 76		● Brushed Metal - Stainless Steel



 Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	Multistandard socket outlets	Pack	Cat.Nos	German standard socket outlets 16 A
10	5 721 23	2P+E unswitched - shuttered for child safety - 2 modules  ○ White ● Magnesium ● Champagne ● Soft Alu	10	5 721 18 ¹	2 modules 2P+E shuttered for child safety  ○ White ● Magnesium ● Champagne ● Soft Alu ● Red tamper-proof ● Dedicated green ● Dedicated orange
10	5 726 23		10	5 726 18 ¹	
10	5 700 42		10	5 700 41 ¹	
10	5 710 42		10	5 710 41 ¹	
5	5 721 35	2P+E switched - shuttered for child safety - 3 modules  ○ White ● Magnesium ● Champagne ● Soft Alu	10	5 724 63 ¹	2P+E with cover  ○ White ● Magnesium
5	5 726 35		10	5 724 62 ¹	
5	5 724 42		10	5 724 60 ¹	
5	5 724 41		10	5 721 19	
		British standard socket outlets Shuttered for child safety ASTA licence Conform to BS 1363 Part 2 Use special plates (p. 92) 2P+E switched - 15 A Conform to BS 546 3 modules  ○ White ● Magnesium ● Champagne ● Soft Alu	10	5 726 19	Euro-US type socket outlets - 15 A -127 V / 16 A - 250 V 2P with shutters - 1 module  ○ White ● Magnesium ● Champagne ● Soft Alu
5	5 721 32		10	5 721 04	
5	5 726 32		10	5 726 04	
5	5 700 45		10	5 700 37	
5	5 710 45	2P+E - 13 A Conform to BS 1363 Part 2 ASTA licence 2 modules  ○ White ● Magnesium ● Champagne ● Soft Alu ● Red	10	5 700 37	2P+E with shutters - 2 modules  ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 721 11		10	5 721 16 ¹	
10	5 726 11		10	5 726 16 ¹	
10	5 700 38		10	5 700 39 ¹	
10	5 710 38	2P+E switched - 13 A Conform to BS 1363 Part 2 ASTA licence 3 modules  ○ White ● Magnesium ● Champagne ● Soft Alu ● Red dedicated non standard pin	10	5 710 39 ¹	2 x 2P+E with shutters - 3 modules  ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 726 41		5	5 721 33	
5	5 721 30		5	5 726 33	
5	5 726 30		5	5 700 46	
5	5 700 44	2P+E - 5 A Conform to BS 546 2 modules  ○ White ● Magnesium ● Champagne ● Soft Alu	5	5 710 46	American type socket outlets 15 A - 127 V 2P - 1 module  ○ White ● Magnesium ● Champagne ● Soft Alu
5	5 710 44		10	5 721 05	
5	5 710 44		10	5 726 05	
5	5 724 67		10	5 710 72	
10	5 721 10	2P+E - 5 A Conform to BS 546 2 modules  ○ White ● Magnesium ● Champagne ● Soft Alu	10	5 700 72	2P+E - 2 modules  ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 726 10		10	5 721 17	
10	5 710 71		10	5 726 17	
10	5 700 71		10	5 700 40	
			10	5 710 40	2 x 2P+E - 3 modules  ○ White ● Magnesium ● Champagne ● Soft Alu
			5	5 721 34	
			5	5 726 34	
			5	5 700 47	
			5	5 710 47	

Arteor™

South African socket outlets







5 725 66





5 720 70 + 5 753 00






Support frame and plate selection charts p. 96

Pack	Cat.Nos	South African type socket outlets - 16 A
		2P+E unswitched - 1 module Conform to SANS 164-2 Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)
10	5 721 36	 <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu ● Red dedicated
10	5 726 36	
10	5 726 48	
10	5 721 48	
10	5 724 68	
		New 2P+E switched
10	5 721 37	 <ul style="list-style-type: none"> ○ White ● Magnesium
10	5 726 37	
		2P+E - shuttered for child safety - 2 modules Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)
10	5 721 22	 <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu ● Red
10	5 726 22	
10	5 724 26	
10	5 724 25	
10	5 724 61	
		2P+E switched - shuttered for child safety - 3 modules Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)
5	5 721 32	 <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu ● Red dedicated
5	5 726 32	
5	5 724 28	
5	5 724 27	
5	5 724 65	

Pack	Cat.Nos	South African type socket outlets - 16 A with USB charger
		All switched new RSA socket outlet (164-2) and old RSA socket outlet (164-1) Prewired, monobloc, 4x4 Supplied with support frame and rocker plate, to be equipped with 2x3 modules plate USB Type-A + Type-C, 3 A - 5 V _{DC} - 15 W Consumption of USB in passive mode < 0,08 W (when switched) The main switch controls the two RSA socket outlets and the double USB charger
1	5 720 70	 <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 725 70	
1	5 710 93	
1	5 700 91	
		2 new RSA socket outlets (164-2) and 1 old RSA switched socket outlet (164-1) Prewired, monobloc, 4x4 Supplied with support frame and rocker plate, to be equipped with 2x3 modules plate
1	5 720 66	 <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 725 66	
1	5 710 92	
1	5 700 90	

Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos		Pack	Cat.Nos	
		Italian type socket outlets			Indian and Euro-US combined socket outlets
		1 module			6 A - 10 A - 240 V and 15 A - 127 V
10	5 721 01	2P+E on line - 10 A			2P+E
10	5 726 01	 <input type="radio"/> White			Shuttered for child safety
		<input checked="" type="radio"/> Magnesium			2 modules
10	5 721 03	2P+E shuttered for child safety - 10/16 A	20	5 734 70	<input type="radio"/> White
10	5 726 03	 <input type="radio"/> White	20	5 736 70	<input checked="" type="radio"/> Magnesium
10	5 700 36	<input checked="" type="radio"/> Magnesium	20	5 748 33	<input type="radio"/> Champagne
10	5 710 36	<input type="radio"/> Champagne			Indian standard socket outlets
		<input type="radio"/> Soft Alu			6 A / 16 A
		Swiss type socket outlets			3 pin combined (2P + Earth)
		T 13, 10 A, 250 V, 2P+E			Shuttered for child safety
		Automatic terminals, 2 modules			2 modules
10	5 718 20	<input type="radio"/> White	10	5 734 71	<input type="radio"/> White
10	5 718 70	<input checked="" type="radio"/> Magnesium	10	5 736 71	<input checked="" type="radio"/> Magnesium
10	5 710 73	<input type="radio"/> Champagne	10	5 748 34	<input type="radio"/> Champagne
10	5 700 73	<input type="radio"/> Soft Alu			ELV socket outlets 3 A
		2 x T 13, 10 A, 250 V, 2P+E			2P
		2 modules			Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92) 12 mm fixing centres for plug Cat.No 0 500 05
10	5 718 27	<input type="radio"/> White			1 module
10	5 718 77	<input checked="" type="radio"/> Magnesium			 <input type="radio"/> White
10	5 710 74	<input type="radio"/> Champagne			<input checked="" type="radio"/> Magnesium
10	5 700 74	<input type="radio"/> Soft Alu			Plug
		Australian type socket outlets			2P - 3A for ELV socket outlet
		2 modules			12 mm fixing centres pins Ø3.6 mm
		2P+E auto-switched shuttered for child safety - 10 A	10	5 721 00	
10	5 721 14	<input type="radio"/> White	10	5 726 00	
10	5 726 14	<input checked="" type="radio"/> Magnesium			
10	5 726 15	<input type="radio"/> Champagne			
10	5 726 02	<input type="radio"/> Soft Alu			
		2P+E shuttered for child safety - 10/15 A	20	0 500 05	
10	5 721 12	<input type="radio"/> White			
10	5 726 12	<input checked="" type="radio"/> Magnesium			
10	5 726 07	<input type="radio"/> Champagne			
10	5 721 07	<input type="radio"/> Soft Alu			


 Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)


Pack	Cat.Nos	Chinese type socket outlets
		2P+E shuttered for child safety - 10 A 2 modules
10	5 721 13	○ White
10	5 726 13	● Magnesium
10	5 726 08	● Champagne
10	5 721 08	● Soft Alu
		2P+E shuttered for child safety - 16 A 2 modules
10	5 721 21	○ White
10	5 726 21	● Magnesium
10	5 723 67	● Champagne
10	5 723 66	● Soft Alu
		2P+E Chinese + 2P Euro-US - 10 A 3 modules
5	5 721 31	○ White
5	5 726 31	● Magnesium
5	5 723 69	● Champagne
5	5 723 68	● Soft Alu
		Israeli type socket outlets
		2P+E shuttered for child safety
10	5 721 24 ¹	○ White
10	5 726 24 ¹	● Magnesium
10	5 700 43 ¹	● Champagne
10	5 710 43 ¹	● Soft Alu

Pack	Cat.Nos	French standard socket outlets 10/16 A
		2 modules
		2P shuttered for child safety
10	5 720 20 ¹	○ White
10	5 725 20 ¹	● Magnesium
10	5 710 86 ¹	● Champagne
10	5 710 85 ¹	● Soft Alu
		2P+E shuttered for child safety
10	5 720 21 ¹	○ White
10	5 725 21 ¹	● Magnesium
10	5 700 21 ¹	● Champagne
10	5 710 21 ¹	● Soft Alu
		2P+E tamper-proof Used to identify a mains circuit (e.g. inverter) and avoid connection of unnecessary equipment which may cause interference on the circuit
10	5 724 66 ¹	● Red
		Tamperproof insert for Cat.No 5 724 66
10	0 502 99	● Tamperproof insert for socket Fits directly into the plug


 Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	RJ 11 and RJ 12 sockets
		Equipped with modular Jack connector with 1/4 turn terminal for fast connection (possible looping)
		RJ 11 - 1 module 4 contacts
10	5 723 00	○ White
10	5 728 00	● Magnesium
10	5 700 56	● Champagne
10	5 710 56	● Soft Alu
		RJ 11 - 2 modules 4 contacts
10	5 723 13 ¹	○ White
10	5 728 13 ¹	● Magnesium
10	5 726 83 ¹	● Champagne
10	5 726 82 ¹	● Soft Alu
		RJ 12 - 2 modules 6 contacts
10	5 723 12 ¹	○ White
10	5 728 12 ¹	● Magnesium
10	5 726 85 ¹	● Champagne
10	5 726 84 ¹	● Soft Alu
		Telephone sockets With IDC connection Conform to British Telecom
		Single master - 2 modules
10	5 723 10 ¹	○ White
10	5 728 10 ¹	● Magnesium
10	5 726 87 ¹	● Champagne
10	5 726 86 ¹	● Soft Alu
		Single secondary - 1 module
5	5 723 01	○ White
5	5 728 01	● Magnesium
5	5 726 89	● Champagne
5	5 726 88	● Soft Alu

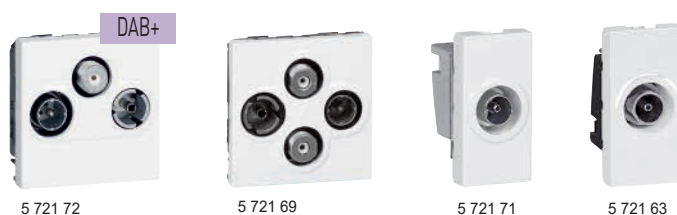
 Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

For Dvbt, Cablecast and satellite installation
UHD TV quality compatible
Classe A shielded star socket LTE ready (4G protected)
Recommended coaxial cable: 17 VATCA
Star cabling (1 socket = 1 cable to antenna, splitter or multiswitch)
Visual check of the connection
Meets EN 50083-4 and EN 50083-2 European directive
TV: male connector (Ø9.5 mm) - 5-68 /120-862 MHz
R: female connector (Ø9.5 mm) - FM 87.5-108 MHz / DAB 174-223 MHz
SAT: "F" type connector - 950-2400 MHz

Pack	Cat.Nos	Multi TV star sockets
		2 modules
		TV-R-SAT sockets Radio FM + DAB+ Low attenuation: 1.5 dB
10	5 721 72 ¹	○ White
10	5 726 72 ¹	● Magnesium
10	5 726 91 ¹	● Champagne
10	5 726 90 ¹	● Soft Alu
		TV-R-SAT-SAT sockets In1: TV-R-SAT1 / In2: SAT2 Low attenuation: 1.5 dB
10	5 721 69 ¹	○ White
10	5 726 69 ¹	● Magnesium
10	5 726 93 ¹	● Champagne
10	5 726 92 ¹	● Soft Alu
		TV-SAT sockets 1 module
10	5 721 67	○ White
10	5 726 67	● Magnesium
10	5 726 95	● Champagne
10	5 726 94	● Soft Alu
		Single TV star sockets - 1 module Low attenuation 1dB
		TV 9.5 mm male sockets
10	5 721 71	○ White
10	5 726 71	● Magnesium
10	5 700 51	● Champagne
10	5 710 51	● Soft Alu
		TV "F" type sockets
10	5 721 63	○ White
10	5 726 63	● Magnesium
10	5 700 50	● Champagne
10	5 710 50	● Soft Alu


Information about DAB+

Digital Audio Broadcasting is the radio equivalent of DTT, a global standard used all over the world.


- More radio stations available
- Better sound quality
- Digital data combined with the audio stream
- This socket has a reception range of FM 87.5 - 108 MHz & DAB+ 174 - 223 MHz
- A link to a collective or individual aerial
- Digital quality

Roll-out between 2018 - 2022


- Countries with active business broadcast
- Countries doing test
- Countries interested by tech

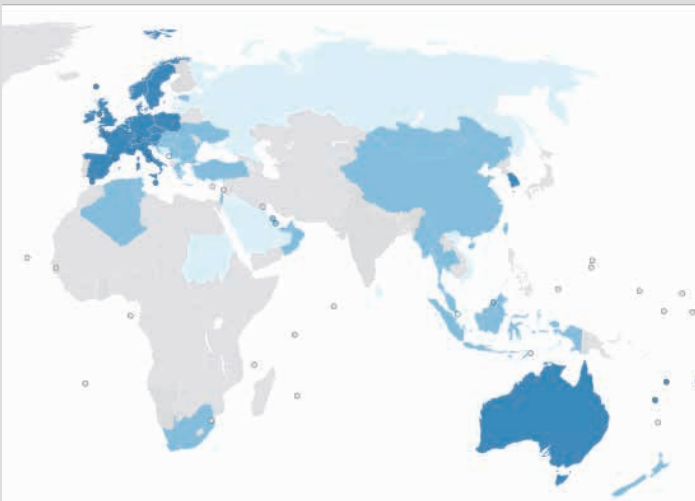



High performance

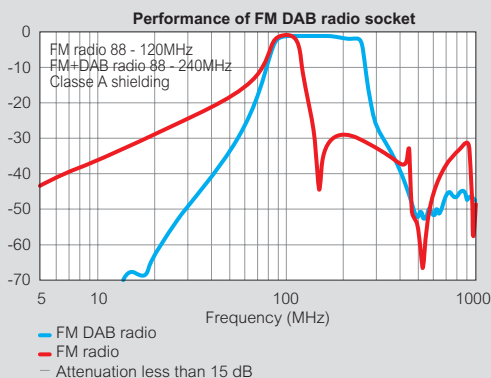

Return loss input

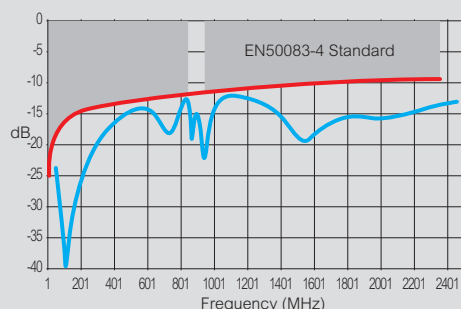

Coupling attenuation

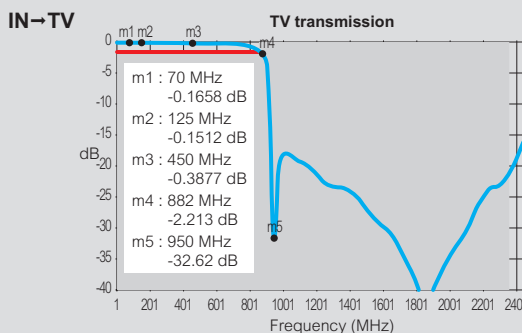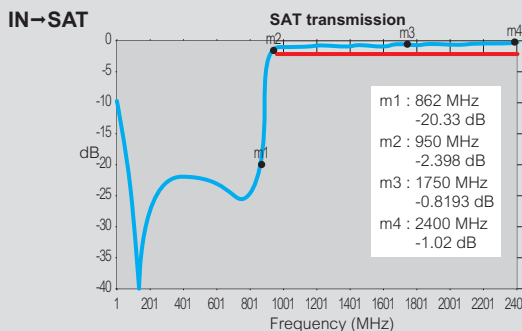

Certification


Class A sockets, protected with LTE block filter. LTE protection is needed to prevent interference from new signals used by smartphones (3G, 4G, 5G). These undesirable signals can cause picture freezing or breaking up, and distorted sound. Legrand uses the PKM laboratory for Class A certification of its sockets.

Requirements for TV corner

- Multi-gang wiring accessories
- TV attenuation < 1,5 dB
- 17 VATC coaxial cable
- Cat. 6 twisted pairs
- Multi-operator, terrestrial DTT, satellite, cable network and ISP, FM and DAB+ radio reception




- Internet connection

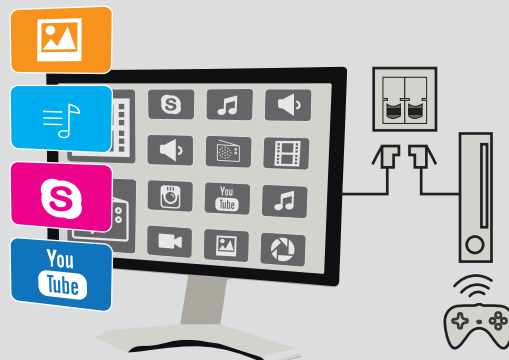

- Smart TV with interactive services
- Connected games console (for online gaming)

Require the certificate of conformity for Class A shielded TV sockets




Support frame and plate selection charts **p. 92**

Can be integrated in any support

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Equipped with connectors with quick toolless connection

Take single-core cables from AWG 22 up to AWG 26, and AWG 26 multicore cables

T568A and B marking with colour codes

Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Pack	Cat. Nos	Cat. 6 _A sockets
		360° metal shielding
		STP - 1 module
10	5 723 06	○ White
10	5 728 06	● Magnesium
10	5 728 46	● Champagne
10	5 728 45	● Soft Alu
10	5 723 51	○ White with orange shutter
10	5 728 51	● Magnesium with orange shutter
10	5 728 48	● Champagne with orange shutter
10	5 728 47	● Soft Alu with orange shutter
10	5 723 52	○ White with green shutter
10	5 728 52	● Magnesium with green shutter
10	5 728 61	● Champagne with green shutter
10	5 728 60	● Soft Alu with green shutter
		STP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
5	5 723 50	○ White with red shutter
5	5 728 50	● Magnesium with red shutter
5	5 728 63	● Champagne with red shutter
5	5 728 62	● Soft Alu with red shutter
		UTP - 1 module
10	5 723 49	○ White
10	5 728 49	● Magnesium
10	5 728 65	● Champagne
10	5 728 64	● Soft Alu
10	5 723 58	○ White with orange shutter
10	5 728 58	● Magnesium with orange shutter
10	5 728 69	● Champagne with orange shutter
10	5 728 68	● Soft Alu with orange shutter
10	5 723 59	○ White with green shutter
10	5 728 59	● Magnesium with green shutter
10	5 728 67	● Champagne with green shutter
10	5 728 66	● Soft Alu with green shutter
		UTP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
5	5 723 57	○ White with red shutter
5	5 728 57	● Magnesium with red shutter
5	5 728 72	● Champagne with red shutter
5	5 728 71	● Soft Alu with red shutter

Pack	Cat. Nos	Cat. 6 sockets
		UTP - 1 module
10	5 723 02	○ White
10	5 728 02	● Magnesium
10	5 700 57	● Champagne
10	5 710 57	● Soft Alu
10	5 723 54	○ White with orange shutter
10	5 728 54	● Magnesium with orange shutter
10	5 728 74	● Champagne with orange shutter
10	5 728 73	● Soft Alu with orange shutter
10	5 723 55	○ White with green shutter
10	5 728 55	● Magnesium with green shutter
10	5 728 80	● Champagne with green shutter
10	5 728 79	● Soft Alu with green shutter
		UTP - 2 modules
10	5 723 14 ¹	○ White - square version
10	5 728 14 ¹	● Magnesium - square version
10	5 700 59 ¹	● Champagne - square version
10	5 710 59 ¹	● Soft Alu - square version
		UTP with controlled access - 2 modules
		Supplied with 2 keys for 5 sockets
5	5 723 53	○ White with red shutter
5	5 728 53	● Magnesium with red shutter
5	5 728 87	● Champagne with red shutter
5	5 728 86	● Soft Alu with red shutter
		UTP with retractable cord - 4 modules
		Cord (0.9 m) winds up automatically with a pushbutton
1	5 723 39	○ White
1	5 728 39	● Magnesium
1	5 728 89	● Champagne
1	5 728 88	● Soft Alu
		FTP - 1 module
10	5 723 22	○ White
10	5 728 22	● Magnesium
10	5 728 91	● Champagne
10	5 728 90	● Soft Alu
		FTP - 2 modules
10	5 723 16 ¹	○ White
10	5 728 16 ¹	● Magnesium
10	5 728 93 ¹	● Champagne
10	5 728 92 ¹	● Soft Alu
		STP shielded - 1 module
10	5 723 23	○ White
10	5 728 23	● Magnesium
10	5 728 95	● Champagne
10	5 728 94	● Soft Alu
		STP shielded - 2 modules
10	5 723 17	○ White
10	5 728 17	● Magnesium
10	5 728 97	● Champagne
10	5 728 96	● Soft Alu

Arteor™

RJ 45 sockets (continued)



5 723 15



Support frame and plate selection charts **p. 92**

Can be integrated in any support
Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)
Equipped with connectors with quick toolless connection
Take single-core cables from AWG 22 up to AWG 26, and AWG 26 multicore cables
T568A and B marking with colour codes
Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Pack	Cat.Nos	Cat. 5e sockets
10	5 723 03	UTP - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 03	
10	5 700 58	
10	5 710 58	
10	5 723 15 ¹	UTP - 2 modules <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 15 ¹	
10	5 728 99 ¹	
10	5 728 98 ¹	
10	5 723 04	FTP - 1 module <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 04	
10	5 729 08	
10	5 729 07	

Arteor™

rear pluggable data sockets and wiring splitters



5 723 31



5 728 32



5 723 36



5 728 35



Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	Rear pluggable RJ 45 sockets
		Certified as conforming to standards ISO 11801 ed. 2.0, EN 50173-1 and EIA/TIA 568 Contacts marked with 568 A and B dual colour code and numbers Connectors with self-stripping terminals Possibility of re-wiring in the event of error Multidirectionnal cable entry For use with area distribution boxes connection to boxes via RJ45-RJ45 dedicated cords Used to create Cat. 6 and Cat. 5e links in accordance with standards 2 modules
10	5 723 31	Cat. 6 - UTP <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 31	
10	5 729 10	
10	5 729 09	
10	5 723 33	Cat. 6 - FTP <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 33	
10	5 729 12	
10	5 729 11	
10	5 723 30	Cat. 5e - UTP <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 30	
10	5 729 18	
10	5 729 17	
10	5 723 32	Cat. 5e - FTP <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 32	
10	5 729 20	
10	5 729 19	
		Telephone/Ethernet wiring splitters Provide increased security against theft and damage to double connectors Provide a rate of 10/100 Mbps Multidirectionnal cable entry Can be installed in all supports depth min. 35 mm Telephone and Ethernet applications marked on the protective cap 1 module
10	5 723 36	FTP - double connector 9 contacts <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 36	
10	5 729 22	
10	5 729 21	
10	5 723 35	UTP - double connector 8 contacts <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
10	5 728 35	
10	5 729 28	
10	5 729 27	



5 723 37



5 728 38

 Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Adaptors for Keystone data sockets

Pack	Cat.Nos	
		Equipped with transparent label-holder
		Single connector - 2 modules
10	5 723 37	○ White
10	5 728 37	● Magnesium
10	5 729 32	● Champagne
10	5 729 31	● Soft Alu


Adaptors for Systimax data sockets

		Equipped with transparent label-holder
		Single connector - 2 modules
10	5 723 38	○ White
10	5 728 38	● Magnesium
10	5 729 34	● Champagne
10	5 729 33	● Soft Alu



5 720 94

5 727 75


5 720 23

 Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

USB data sockets for data transfer

Pack	Cat.Nos	
		Used to bring connections closer to the user For connecting USB devices (interactive white board, scanner-printer, external hard disk)
		Preterminated - USB 3.0 - 1 module
		Maximum length: 5 m Recommended cable: USB A Equipped with a 15 cm cord
1	5 720 94	○ White
1	5 725 94	● Magnesium
1	5 725 76	● Champagne
1	5 725 75	● Soft Alu
		Connection via screw terminals - USB 2.0
		1 module
		Maximum length: 5 m Recommended cable: USB A Cross-section 1 mm ²
1	5 722 75	○ White
1	5 727 75	● Magnesium
1	5 725 53	● Champagne
1	5 725 52	● Soft Alu
		USB Data extender
		Used to bring connections closer to the user in case of large distances. For connecting USB devices (digital school board / interactive whiteboard...) located more than 5 m away (30 m max.) from a source (computer...)
		The kit includes
		- a transmitter (1 module)
		- a receiver (1 module)
		The link between the transmitter and the receiver is made via a RJ 45/RJ 45 cord
1	5 720 23	○ White




How to connect HDMI preterminated sockets and videoprojector switch

A wide range of technologies (HDMI, HD15, DISPLAY PORT, RCA, JACK) to suit the location and the user requirements

INSTALLATION EXAMPLE




QUICK
INSTALLATION



EASY
CONNECTION



OPTIMUM
PERFORMANCE

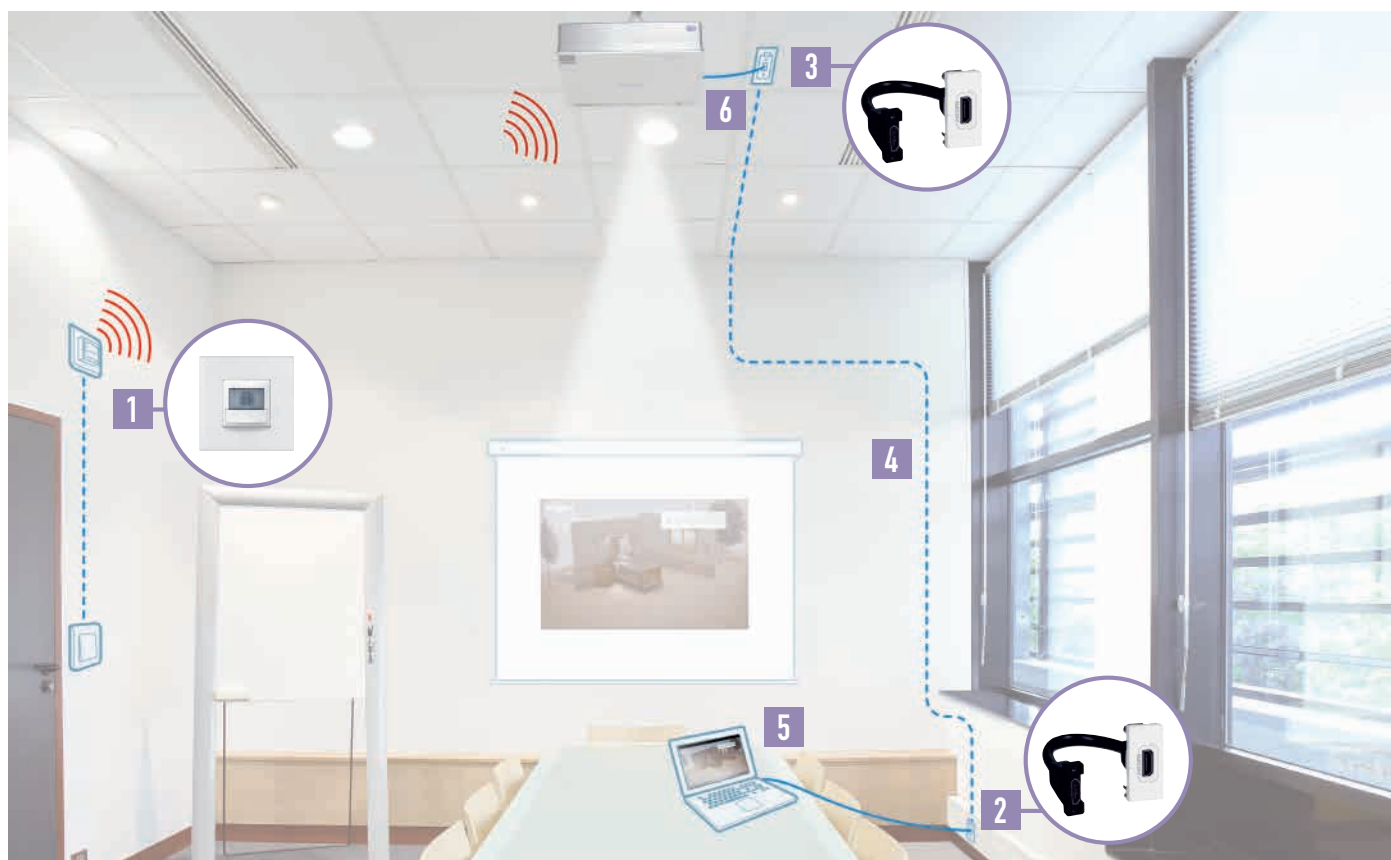

1

Infrared ON/STANDBY control for video projector associated with a push-button Cat.No 5 720 89

2 3

Preterminated HDMI sockets Cat.No 5 720 96

4

10 m male/male HDMI cords Cat.No 0 517 20

5

3 m male/male HDMI cord Cat.No 0 517 34

6

1 m male/male HDMI cord Cat.No 0 517 32


Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	HDMI type A sockets	Pack	Cat.Nos	HD15 sockets
		Used to transmit high-definition digital audio/video streams between a source (Blu-ray player, computer) and a compatible receiver (TV, videoprojector...)			Used to transmit analog video streams (VGA, XGA, UXGA depending on graphic card) between a source (computer) and a compatible receiver (LCD, video projector, TV, etc...)
		Preterminated sockets HDMI 1.4 - 1 module Equipped with cord, length 15 cm			Preterminated sockets - 1 module Equipped with cord, length 15 cm
1	5 720 96	○ White	1	5 720 97	○ White
1	5 725 96	● Magnesium	1	5 725 97	● Magnesium
1	5 725 18	● Champagne			Screw-type female HD15 sockets - 2 modules
1	5 725 17	● Soft Alu	1	5 722 82 ¹	○ White
		Preterminated sockets HDMI 1.4 - 2 modules Equipped with cord, length 15 cm	1	5 727 82 ¹	● Magnesium
1	5 722 99	○ White - square version			Screw-type female HD15 + 3.5 mm Jack sockets - 2 modules
1	5 725 99	● Magnesium - square version	1	5 722 88	○ White
1	5 723 46	● Champagne - square version	1	5 727 88	● Magnesium
1	5 723 45	● Soft Alu - square version			Solder-type female HD15 sockets - 1 module 15 pin
		HDMI extender	1	5 722 79	○ White
1	0 517 38	Extends HDMI audio/video signals up to 57 m at up to a 4 K resolution between a source (computer, Blu-ray player) and a receiver (videoprojector, TV) in a meeting room or classroom. Kit includes both transmitter and receiver with link via a network cord RJ 45/RJ 45 (not supplied). Compatible with 3D video, 4K resolution, EDID passthrough and HDCP. Including IR control. Certified HD BaseT.	1	5 727 79	● Magnesium
		Display port sockets			Videoprojector switch
		Used to transmit high-definition digital audio/video streams between a source (laptop, computer, etc) and a compatible receiver (TV, videoprojector...)			Universal remote switch allowing to turn ON or place in STANDBY mode a video projector. Works with all videoprojectors or TV through IR learning process. Installed close to the room's lighting switches, it replaces the constructors remote and fosters the ignition and extinction of the video projector therefore reducing energy consumption and extending the bulb's lifetime. Equipped with cord, length 15 cm.
		Preterminated socket - 1 module Equipped with cord, length 15 cm	1	5 720 89	○ White
1	5 720 90	○ White			
1	5 725 90	● Magnesium			


USB data sockets see **p. 82**




5 720 91


5 722 72

5 722 83

5 722 70

5 722 84

5 722 76


Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	Jack sockets 3.5 mm
		3.5 mm Jack connectors can be used to create audio links
		Preterminated sockets - 1 module Equipped with cord, length 15 cm
1	5 720 91	○ White
1	5 725 91	● Magnesium
1	5 725 59	● Champagne
1	5 725 55	● Soft Alu
		4 screw-type female 3.5 mm Jack socket 1 module
1	5 722 74	○ White
1	5 727 74	● Magnesium
1	5 724 91	● Champagne
1	5 724 90	● Soft Alu
		Solder-type female 3.5 mm Jack socket 1 module
1	5 722 78	○ White
1	5 727 78	● Magnesium

		Female 2 RCA sockets
		Provide the stereo audio link for any peripheral device such as a DVD drive, camera, video recorder
		Preterminated - 1 module Equipped with a 15 cm cord
1	5 720 92	○ White
1	5 725 92	● Magnesium
1	5 724 79	● Champagne
1	5 724 75	● Soft Alu
		Connection on screw terminals - 1 module
1	5 722 72	○ White
1	5 727 72	● Magnesium
1	5 724 95	● Champagne
1	5 724 94	● Soft Alu

		Female 3 RCA sockets
		Provide the stereo audio link for any peripheral device such as a DVD drive, camera, video recorder
		Connection on screw terminals - 2 modules
1	5 722 73	○ White
1	5 727 73	● Magnesium
1	5 724 97	● Champagne
1	5 724 96	● Soft Alu

Pack	Cat.Nos	3-pole XLR sockets
		For the stereo connection of any peripheral, microphone, mixing console Recommended cable: 1 audio pair 0.14 to 0.5 mm ² shielded Max. cable length: 50 m (beyond this an audio amplifier is recommended)
		2 modules
		XLR female
1	5 722 83	○ White
1	5 727 83	● Magnesium
1	5 724 99	● Champagne
1	5 724 98	● Soft Alu
		XLR male
1	5 722 77	○ White
1	5 727 77	● Magnesium

		Loudspeaker sockets
		4 mm ² terminals
		1 module
10	5 722 70	○ White
10	5 727 70	● Magnesium
10	5 726 97	● Champagne
10	5 726 96	● Soft Alu
		2 modules
10	5 722 80 ¹	○ White
10	5 727 80 ¹	● Magnesium
10	5 726 99 ¹	● Champagne
10	5 726 98 ¹	● Soft Alu

		Attenuators
		100 V - 25 W Allow to adjust power to 25 W from a balanced 100 V loudspeaker line
		2 modules
1	5 722 84	○ White
1	5 727 84	● Magnesium

		Other audio and video sockets
		Female BNC 75 sockets
		Provide the composite video link for any peripheral device such as a DVD drive, camera, video recorder, etc
		Connection on screw terminals - 1 module
1	5 722 76	○ White
1	5 727 76	● Magnesium



Arteor™

Bluetooth sound diffusion



5 741 31



5 739 82



0 673 03

Support frame and plate selection charts p. 92

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat. Nos	Bluetooth module with built-in 230 V power supply
1	5 741 31	Allows music or digital radio to be played in stereo with Bluetooth technology from a smartphone, tablet or PC
1	5 741 32	With ON/OFF control, volume control (+/-) manually or via smartphone, and file selection manually or via smartphone
1	5 741 33	For installation in flush-mounting box depth 40 mm
1	5 741 34	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu

Loudspeakers

Connect to the Bluetooth module

For flush-mounting in suspended ceiling - white

Power: 20 W (10 Wrms) - 8 Ω
 Efficiency > 86 dB (1 W at 1 m)
 Ø of hole: 90 mm
 External dimensions: Ø 100 mm

For wall mounting - anthracite

Power: 12 W (6 Wrms) - 8 Ω
 Efficiency > 86 dB (1 W at 1 m)
 External dimensions: 127 x 127 mm
 For installation in flush-mounting box depth 50 mm Cat.No 0 893 79 for dry partitions or Cat.No 0 892 79 for masonry

USB chargers, p. 68



Arteor™


Bluetooth sound diffusion

Installation principle

Mobile access to digital radio and downloaded music
 Quick pairing and convenience
 Ideal for kitchens, bedrooms and bathrooms
 Frees up your work surfaces and shelves instead of using portable speakers and their voluminous cables


With loudspeakers in false ceiling Cat.No 5 739 82

- Bedhead unit with switch + Bluetooth + USB charger

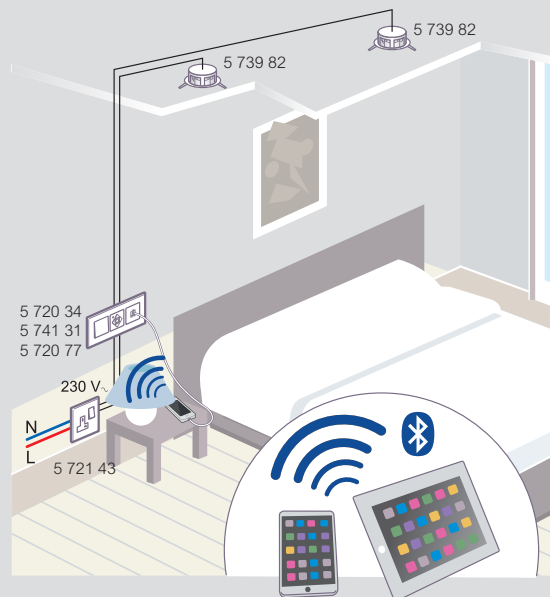


With wall-mounted loudspeakers Cat.No 0 673 03

- Bedhead unit with switch + Bluetooth + USB charger

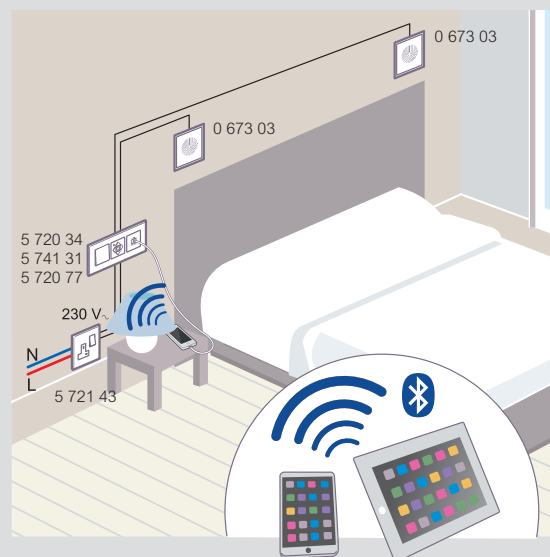


Flush-mounted loudspeakers

- High-quality sound with 8 Ω speakers
- Quick pairing with Bluetooth
- No visible wiring

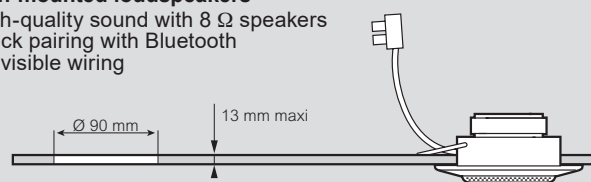

- Can be flush-mounted in 60 mm suspended ceiling



NUVO®


HIGH QUALITY DIGITAL MUSIC IN EVERY ROOM



Simplicity,
Quality &
Installation
flexibility

Listen to your digital music from any source and in any room. NUVO is an intelligent system, specifically designed to stream music in digital format in any room in your home. Made up of several audio Hi-Fi components, it connects via

Wi-Fi or via a cable to your home LAN network. Using a dedicated free app on your smartphone or tablet, you can access music libraries in your local network or on the best online music streaming services.

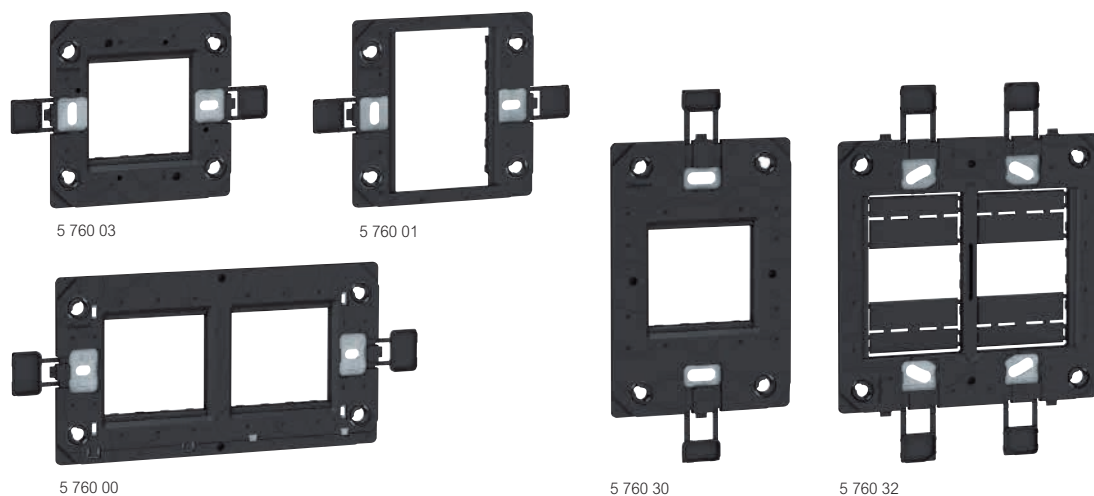
 Plate selection charts **p. 92**

Pack	Cat.Nos	Support frames for BS type boxes 60.3 mm fixing centres
10	5 760 03	Screw mounting (screws supplied) For 1 gang box Square - for 1 or 2 modules
5	5 760 01	Square - for 3 modules
10	5 760 02	For 2 gang box Rectangular - for 3 modules
10	5 760 00	Rectangular - for 2 x 2 modules

Pack	Cat.Nos	Support frame for Italian type boxes 83.5 mm fixing centres
10	5 760 40	Screw mounting For 1 to 3 modules

Pack	Cat.Nos	Support frames for South African type boxes 83.5 mm fixing centres
10	5 760 30	Screw mounting For 2" x 4" boxes For 2 modules (electronic functions except 2-module mechanisms to be mounted on 3-module support frame)
10	5 760 40	For 1 to 3 modules
5	5 760 31	For 4" x 4" boxes For 2, 3 and 4 modules
5	5 760 32	For 2 x 3 modules

Arteor™

ancillary mechanisms



Arteor™

blanking cover plates



Support frame and plate selection charts **p. 92**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92)

Pack	Cat.Nos	Blank modules
10	5 723 41	1 module <ul style="list-style-type: none"> ○ White - square version ● Magnesium - square version ● Champagne - square version ● Soft Alu - square version
10	5 728 41	
10	5 700 60	
10	5 710 60	
10	5 710 60	
10	5 723 42	2 modules <ul style="list-style-type: none"> ○ White - square version ● Magnesium - square version ● Champagne - square version ● Soft Alu - square version
10	5 728 42	
10	5 700 61	
10	5 710 61	
10	5 710 61	
5	5 723 43	3 modules <ul style="list-style-type: none"> ○ White - square version ● Magnesium - square version ● Champagne - square version ● Soft Alu - square version
5	5 728 43	
5	5 728 20	
5	5 728 19	
5	5 728 19	
10	5 723 20	Cable outlets 20 A cable outlet for junction - 2 modules ○ White
5	5 723 21	45 A cable outlet - BS 1 gang Supplied with cover plate For flush mounting back box to be min. 45 mm deep ○ White
10	5 723 07	Cord outlets 1 module with Ø8 mm entry ○ White
10	5 723 19	2 modules ○ White

Support frame and plate selection charts **p. 92**

To be equipped with support frames (p. 88) and plates (p. 92)


Pack	Cat.Nos	British standard blanking cover plates
5	5 751 30	For 1 gang box <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze
5	5 716 08	
5	5 751 32	
5	5 716 10	
5	5 716 12	
5	5 716 14	
5	5 751 40	For 2 gang box <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze
5	5 716 09	
5	5 751 42	
5	5 716 11	
5	5 716 13	
5	5 716 15	
10	5 754 10	South African standard blanking cover plates For 2" x 4" boxes <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Magnesium ● Champagne ● Dark Bronze
10	5 714 10	
10	5 754 12	
10	5 714 52	
10	5 714 53	
10	5 714 51	
5	5 753 60	South African standard blanking cover plates For 4" x 4" boxes <ul style="list-style-type: none"> ○ White ● Soft Alu ● Graphite ● Champagne
5	5 714 00	
5	5 753 62	
5	5 753 64	




5 760 16



5 754 50




5 754 70




5 754 80



5 751 90



5 723 90

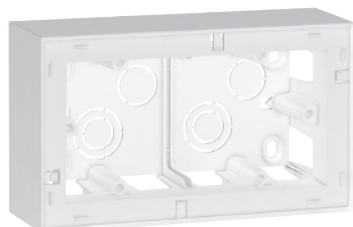

5 723 92


Support frame and plate selection charts **p. 92**

Pack	Cat.Nos	Panel mounting supports
10	5 760 15	For 1 to 3 mm thick panels For 1 module Clips into a 28 x 53.5 mm aperture
10	5 760 16	For 2 modules Clips into a 58 x 53.5 mm aperture
10	5 760 13	Modular support For mounting 2-module mechanisms on symmetrical rail
10	5 754 50	Dedicated plates for trunking 1-gang plate 2 modules (supplied with support frame)
5	5 754 60	2-gang plate 2 x 2 modules (supplied with support frame)
10	5 754 70	White plate for 1-gang 13 A switched socket
5	5 754 80	White plate for 2-gang 13 A switched socket
5	5 751 90	IP 44 plate For British and German standards For mounting in 1-gang box Support frame supplied

Pack	Cat.Nos	Flush-mounting boxes
1	6 890 36	For British standard 6 and 8-module plates and frames For 6 modules 211.4 x 75.7 x 50.8 mm
1	6 890 38	For 8 modules 231 x 75.7 x 50.8 mm
1	6 890 28	For 2 x 6 modules 212 x 143 x 42 mm
1	0 818 56	For 3 x 6 modules 212 x 212 x 42 mm
10	5 723 90	Surface-mounting boxes For British, German and French standard For 2 modules - 1 gang 38 mm depth
25	5 723 92	For 4 modules 2 x 2 modules - 2 gang 48 mm depth (suitable for shaver sockets)
2	5 723 96	For 2 x 6 modules 38 mm depth

A TOUCH OF ARTISTRY

ARTEOR™



















A Collection of Masterpieces

Transform living spaces with Arteor, the beautiful and functional range of wiring devices. It's up to you what marvellous feat you can accomplish with this collection of masterpieces.






Arteor™ British standard plate selection charts

60.3 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES						
				Neutral						
				White 	Soft Alu 	Graphite 	Magnesium 	Champagne 	Dark Bronze 	
SQUARE VERSION										
1 module	1 gang	5 760 03		5 752 00	5 713 01	5 752 02	5 713 11	5 713 21	5 713 31	
2 modules		5 760 03 5 760 01 ⁽¹⁾		5 752 10	5 713 02	5 752 12	5 713 12	5 713 22	5 713 32	
3 modules - 1 gang	1 gang	5 760 01		5 751 60	5 713 03	5 751 62	5 713 13	5 713 23	5 713 33	
3 modules and shaver sockets	2 gang	5 760 02		5 750 70	5 713 05	5 750 72	5 713 15	5 713 25	5 713 35	
4 modules	2 gang	5 760 00		5 750 80	5 713 04	5 750 82	5 713 14	5 713 24	5 713 34	
6 modules	6 890 36	Supplied with support frame		5 753 70	5 713 06	5 753 72	5 713 16	5 713 26	5 713 36	
8 modules	6 890 38	Supplied with support frame		5 767 00	5 713 08	5 767 02	5 713 18	5 713 28	5 713 38	
2 x 6 modules	6 890 28	Supplied with support frame		5 753 90	5 716 00	5 753 92	5 716 02	5 716 04	5 716 06	
3 x 6 modules	0 818 56	Supplied with support frame		5 754 00	5 716 01	5 754 02	5 716 03	5 716 05	5 716 07	
For 5 A/13 A switched socket outlet - 1 gang	-	Not needed		5 750 90	5 713 07	5 750 92	5 713 17	5 713 27	5 713 37	
For 13 A twin Switched socket outlet - 2 gang	-	Not needed		5 751 00	5 713 09	5 751 02	5 713 19	5 713 29	5 713 39	
For 13 A fused connection unit switched	-	Not needed		5 751 20	5 713 10	5 751 22	5 713 20	5 713 30	5 713 40	
For cooker unit Cat.No 5 720 88	-	Not needed		5 751 50	-	-	-	-	-	
Blanking cover plate	1 gang	5 760 03 5 760 01		5 751 30	5 716 08	5 751 32	5 716 10	5 716 12	5 716 14	
Blanking cover plate	2 gang	5 760 02		5 751 40	5 716 09	5 751 42	5 716 11	5 716 13	5 716 15	

1: Use 5 760 01 support frame for 2 module mechanisms to be mounted on 3 module support frame (see mention in catalogue page)

PLATES										
Mirror		Brushed Metal				Reflective Metal			Wood	Signature
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube
										
5 752 04	5 752 03	5 752 06	5 761 00	5 713 51	5 713 41	5 713 61	5 713 81	5 713 71	5 713 91	5 714 01
5 752 14	5 752 13	5 752 16	5 761 20	5 713 52	5 713 42	5 713 62	5 713 82	5 713 72	5 713 92	5 714 02
5 751 64	5 751 63	5 751 66	5 761 80	5 713 53	5 713 43	5 713 63	5 713 83	5 713 73	5 713 93	5 714 03
5 750 74	5 750 73	5 750 76	5 761 60	5 713 55	5 713 45	5 713 65	5 713 85	5 713 75	5 713 95	5 714 05
5 750 84	5 750 83	5 750 86	5 761 40	5 713 54	5 713 44	5 713 64	5 713 84	5 713 74	5 713 94	5 714 04
5 753 74	5 753 73	5 753 76	5 763 70	5 713 56	5 713 46	5 713 66	5 713 86	5 713 76	5 713 96	5 714 06
5 767 04	5 767 03	5 767 06	5 767 10	5 713 58	5 713 48	5 713 68	5 713 88	5 713 78	5 713 98	5 714 08
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
5 750 94	5 750 93	5 750 96	5 762 10	5 713 57	5 713 47	5 713 67	5 713 87	5 713 77	5 713 97	5 714 07
5 751 04	5 751 03	5 751 06	5 762 00	5 713 59	5 713 49	5 713 69	5 713 89	5 713 79	5 713 99	5 714 09
5 751 24	5 751 23	5 751 26	5 761 90	5 713 60	5 713 50	5 713 70	5 713 90	5 713 80	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-

Arteor™ South African standards plate selection charts

83.5 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES						
				Neutral						
				White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze	
										
SQUARE VERSION										
1 module	0 800 49	5 760 40		5 752 20	5 714 11	5 752 22	5 752 27	5 714 31	5 714 41	
2 modules	0 800 49	5 760 40		5 752 30	5 714 12	5 752 32	5 752 37	5 714 32	5 714 42	
3 modules	0 800 49	5 760 40		5 750 10	5 714 13	5 750 12	5 750 17	5 714 33	5 714 43	
Blanking cover plate	2" x 4"	5 760 40		5 754 10	5 714 10	5 754 12	5 714 52	5 714 53	5 714 51	
4 modules	0 800 42	5 760 11		5 750 30	5 714 14	5 750 32	5 750 37	5 714 34	5 714 44	
6 modules	0 800 43	5 760 12		5 750 40	5 714 15	5 750 42	5 750 47	5 714 35	5 714 45	

ARTEOR SPECIAL PLATES										
MyHOME screen 3.5"		Not needed		-	-	-	-	-	-	
Central unit for temperature control	Supplied with box	Not needed		-	-	-	-	-	-	












PLATES											
Mirror		Brushed Metal				Reflective Metal			Wood	Signature	
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube	
											
5 752 44	5 752 43	5 752 46	5 764 10	5 714 26	5 714 16	5 714 36	5 714 56	5 714 46	5 714 66	5 714 76	
5 752 54	5 752 53	5 752 56	5 764 30	5 714 27	5 714 17	5 714 37	5 714 57	5 714 47	5 714 67	5 714 77	
5 752 74	5 752 73	5 752 76	5 764 50	5 714 28	5 714 18	5 714 38	5 714 58	5 714 48	5 714 68	5 714 78	
-	-	-	-	-	-	-	-	-	-	-	
5 750 34	5 750 33	5 750 36	5 762 70	5 714 29	5 714 19	5 714 39	5 714 59	5 714 49	5 714 69	-	
5 750 44	5 750 43	5 750 46	5 762 80	5 714 30	5 714 20	5 714 40	5 714 60	5 714 50	5 714 70	-	
5 764 84	5 764 83	-	-	-	-	5 764 86	-	-	-	-	
5 765 24	5 765 23	-	-	-	-	-	-	-	-	-	

Arteor™ South African standard plate selection charts

83.5 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES						
				Neutral						
				White 	Soft Alu 	Graphite 	Magnesium 	Champagne 	Dark Bronze 	
SQUARE VERSION										
1 vertical module	2" x 4"	5 760 30		5 767 20	5 714 85	5 767 22	5 714 95	5 715 05	5 715 15	
1 horizontal module		5 760 40		5 752 40	5 714 81	5 752 42	5 714 91	5 715 01	5 715 11	
2 modules		5 760 30 ⁽¹⁾ 5 760 40		5 752 50	5 714 82	5 752 52	5 714 92	5 715 02	5 715 12	
3 modules		5 760 40		5 752 70	5 714 83	5 752 72	5 714 93	5 715 03	5 715 13	
2 modules	4" x 4"	5 760 31		5 752 60	5 714 86	5 752 62	5 714 96	5 715 06	5 715 16	
3 modules		5 760 31		5 752 80	5 714 87	5 752 82	5 714 97	5 715 07	5 715 17	
4 modules		5 760 31		5 752 90	5 714 84	5 752 92	5 714 94	5 715 04	5 715 14	
2 x 3 modules		5 760 32		5 753 00	5 714 88	5 753 02	5 714 98	5 715 08	5 715 18	
Blanking cover plate Italian / US standards	2" x 4"	5 760 40		5 754 10	5 714 10	5 754 12	5 714 52	5 714 53	5 714 51	
Blanking cover plate US standard	4" x 4"	5 760 31		5 753 60	5 714 00	5 753 62	-	5 753 64	-	

1: Only for 2 modules electronic functions

PLATES											
Mirror		Brushed Metal				Reflective Metal			Wood	Signature	
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube	
											
5 767 24	5 767 23	5 767 26	5 767 30	5 715 26	5 715 21	5 715 31	5 715 41	5 715 36	5 715 46	5 715 51	
5 752 44	5 752 43	5 752 46	5 764 10	5 714 26	5 714 16	5 714 36	5 714 56	5 714 46	5 714 66	5 714 76	
5 752 54	5 752 53	5 752 56	5 764 30	5 714 27	5 714 17	5 714 37	5 714 57	5 714 47	5 714 67	5 714 77	
5 752 74	5 752 73	5 752 76	5 764 50	5 714 28	5 714 18	5 714 38	5 714 58	5 714 48	5 714 68	5 714 78	
5 752 64	5 752 63	5 752 66	5 766 20	5 715 27	5 715 22	5 715 32	5 715 42	5 715 37	5 715 47	5 715 52	
5 752 84	5 752 83	5 752 86	5 766 40	5 715 28	5 715 23	5 715 33	5 715 43	5 715 38	5 715 48	5 715 53	
5 752 94	5 752 93	5 752 96	5 766 50	5 715 29	5 715 24	5 715 34	5 715 44	5 715 39	-	-	
5 753 04	5 753 03	5 753 06	5 766 70	5 715 30	5 715 25	5 715 35	5 715 45	5 715 40	-	-	
-	-	-	-	-	-	-	-	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	

Connected home

connected gateway pack

Must be ordered for any
connected installation

Step 1: Gateway pack for a connected home



5 742 09

Support frames and plates selection charts **p. 92 to 97**

Used to create the radio network and the Wi-Fi connection of the connected installation
Enables remote control of your home (lighting, roller blinds and electrical appliances) using a smartphone via the Home + Control App and/or voice control with a voice assistant
Must be ordered to start any connected installation
To be completed by adding individual connected products
2.4 GHz Wi-Fi connection required

Pack	Cat.Nos	Connected gateway pack Arteor™ with Netatmo
		Used to create the radio network and the Wi-Fi connection Composition: - 1 flush-mounted Zigbee/Wi-Fi gateway Mechanisms to be equipped with support frames and plates (p. 92 to 97) Allows the connection of the installation to the Wi-Fi network and enables control through the Home + Control App and voice assistants (Google Assistant, Amazon Alexa, Apple Siri) ⁽¹⁾ Can be installed in place of an existing product Suitable for flush-mounting box min. depth 35mm - 1 Home/Away wireless master switch with preset life scenes Supplied with multi-standard support frame (with removable fins) To be equipped with 2-module plates (p. 92 to 97) Used to create the radio network and to control life scenes Life scenes can be customised in the Home + Control App Supplied with CR2032 3 V long-life battery for power supply and 2 removable stickers for fixing the control unit on any substrate LED function for low battery indication
1	5 742 09	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 742 27	
1	5 742 36	
1	5 742 18	

1: Availability of voice assistants to be checked in your country

Connected home

connected light switches

Step 2: Connected products



Home + Control
LEGRAND



5 742 01



574221

Support frames and plates selection charts **p. 92 to 97**

Used to create your connected installation, require prior installation of a gateway pack for connected installation

Pack	Cat.Nos	Connected light switches Arteor™ with Netatmo
		Switch with neutral 250 W, wired, 1 module Mechanisms to be equipped with support frames and plates (p. 92 to 97) For local or remote control of lighting Can be controlled by one or more wireless light switches or mechanical 2-way switches Compatible with all loads Can be installed in place of an existing switch in a flush-mounting box depth 35 mm Locator and indicator function can be activated from the Home + Control App Zigbee Certified Product
1	5 742 01	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 742 20	
1	5 742 29	
1	5 742 11	
		Switch without neutral, 5 - 300 W, with dimmer option, wired, 2 modules Mechanisms to be equipped with support frames and plates (p. 92 to 97) For local or remote ON/OFF or dimming control of lighting Can be controlled by one or more wireless light switches Dimmer mode and locator and indicator function can be activated from the Home + Control App Compatible with all loads: - Dimmable LEDs: 50 W - Halogen with transformer: 300 VA - Fluorescent tube: 300 VA - Halogen 230 V and incandescent: 300W Supplied with a bleeder Memory level function Can be installed in place of an existing switch in a flush-mounting box depth 35 mm Zigbee Certified Product
1	5 742 02	<ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 742 21	
1	5 742 30	
1	5 742 12	



Connected home

connected light switches (continued)

Step 2: Connected products



5 743 40



5 743 43



5 742 43

Support frames and plates selection charts **p. 92 to 97**

Used to create your connected installation, require prior installation of a gateway pack for connected installation

Pack	Cat.Nos	Connected light switches Arteor™ with Netatmo (continued)
		Switch with neutral, 150 W, with dimmer option, wired, 1 module
		Mechanisms to be equipped with support frames and plates (p. 92 to 97) For local or remote ON/OFF or dimming control of lighting Can be controlled by one or several wireless light switches or mechanical push-buttons without neon Dimmer mode and locator/ indicator function can be activated from the Home + Control App Compatible with all loads: - Dimmable LEDs: 150 W - Halogen with transformer: 150 VA - Fluorescent tube: 150 VA - Halogen 230V and incandescent 150 W Memory level function Can be installed in place of an existing switch in a flush-mounting box depth 35 mm Zigbee Certified Product
1	5 743 40	White
1	5 743 42	Magnesium
1	5 743 43	Champagne
1	5 743 41	Soft Alu
		Micromodule switch with neutral, 300 W
1	5 742 43	Used to connect lights with a ceiling box installation Can be controlled by one or more wireless light switches or mechanical push-buttons Paired by tapping the wireless control on the micromodule Zigbee Certified Product
		Dry contact
1	0 676 96	For control of 1 circuit 2500 W connected to its terminals according to 3 different operation modes: time-lag switch, switch, remote control switch Its receiver function is used to execute, on its circuits, on/off commands received from wireless switches or remote controls Delivered with one Plexo IP55 box for outdoor use Compatible for indoor and outdoor use

Connected home

connected outlets

Step 2: Connected products



Home + Control
LEGRAND



5 742 00



5 742 00 + 5 721 32 + 5 721 37 + 5 753 00



4 120 15

Plates selection charts **p. 92 to 97**

Used to complete your connected installation, require prior installation of a gateway pack for connected installation

Pack	Cat.Nos	Connected socket outlet module Arteor with Netatmo - 16A - 230VA - 3680 W, 1 module
		Mechanisms to be equipped with support frames and plates (p. 92 to 97) Allows to create a connected socket outlet for integration into the connected installation To be wired to a traditional socket outlet The connected socket outlet can be paired with one or more wireless light switches Connected socket outlets allow to - remotely control electrical appliances - measure instantaneous power - monitor daily and monthly consumption - send notifications in case of abnormal use (overconsumption etc.) Can be installed in place of an existing socket outlet in a flush-mounting box 40 mm min. depth Indicator LED function
1	5 742 00	White
1	5 742 28	Magnesium
1	5 742 37	Champagne
1	5 742 19	Soft Alu
		Energy module for 2 rail mounting
1	4 120 15	Measures the instantaneous and cumulative global electrical consumption of a single phase installation (63A maxi) Sends a notification in case of reaching a configurable limit in the Home + Control App. Delivered with 1 coil 1 module

Connected home


connected outlets (continued)

Step 2: Connected products



0 648 79

Used to complete your connected installation, require prior installation of a gateway pack for connected installation

Pack	Cat.Nos	Cable outlet
1	0 648 79	<p>Enables remote control of electrical devices Wiring compatible with pilot wire Can be controlled by a wireless control 3000 W max. (protected against overloads) Functions: - ON/OFF, pilot wire management - instantaneous power measurement and daily/ monthly consumption monitoring with configurable sending of notifications (defect, consumption, etc.) Supplied with mounting support, cover plate and worksite protection Multi-gang fixing not possible Zigbee Certified Product</p>  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	0 648 83	
1	0 648 82	
1	0 648 98	

Connected home

connected curtain/roller blind switches





Step 2: Connected products



5 742 04

 Support frames and plates selection charts **p. 92 to 97**

Used to complete your connected installation, require prior installation of a gateway pack for connected installation

Pack	Cat.Nos	Connected curtain/roller blind switch Arteor™ with Netatmo
1	5 742 04	<p>Mechanisms to be equipped with support frames and plates (p. 92 to 97) For local and remote control of a 230 VA roller blind (raise/lower/stop functions and level management) Compatible with roller blinds with mechanical or electronic stop, not compatible with radio-controlled roller blinds Can be paired with one or more roller blind wireless switches Can be installed in place of an existing roller blind switch in a flush-mounting box depth 35 mm Zigbee Certified Product 1 module - with neutral</p>  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 742 22	
1	5 742 31	
1	5 742 13	
1	0 676 97	<p>Connected curtain/roller blind micromodule IP 44</p>  <p>For local and remote control of a 230 VA roller blind (raise/lower/stop functions and level management) Compatible with roller blinds with mechanical or electronic stop, not compatible with radio-controlled roller blinds Can be paired with one or more roller blind wireless switches To be installed in the ceiling box or roller blind box to connect a new or existing roller blind Zigbee Certified Product</p>

Connected home

connected wireless light controls

Step 2: Connected products



5 742 05



5 742 47



5 742 91



5 742 52



Support frames and plates selection charts **p. 92 to 97**

Used to complete your connected installation. Require a prior connected installation including a gateway pack

Pack	Cat.Nos	Wireless light switches Arteor™ with Netatmo
		Used to add an extra lighting control Easy pairing by tapping the wired product or by using the Home + Control App Supplied with CR2032 3 V long-life battery for power supply LED function for low battery indication Zigbee Certified Product
		Surface mounting version, 1 gang Supplied with multi-standard support frame (with removable fins) and 2 removable stickers for fixing the control unit on any substrate. To be equipped with 2-module plates (p. 50 to 51) Controls up to 20 wired products: switches, micromodules, socket outlets
1	5 742 05	○ White
1	5 742 23	● Magnesium
1	5 742 32	● Champagne
1	5 742 14	● Soft Alu
		Surface mounting version, 2 gang Supplied with multi-standard support frame (with removable fins) and 2 removable stickers for fixing the control unit on any substrate. To be equipped with 2-module plates (p. 92 to 97) Controls up to 2x20 wired products: switches, micromodules, socket outlets
1	5 742 44	○ White
1	5 742 46	● Magnesium
1	5 742 47	● Champagne
1	5 742 45	● Soft Alu
		Flush-mounting version, 1 module Mechanisms to be equipped with support frames and plates (p. 92 to 97) Controls up to 20 wired products: switches, micromodules, socket outlets Can be installed in a flush-mounting box depth 35 mm, in addition to wired products
1	5 742 91	○ White
1	5 742 76	● Magnesium
1	5 743 26	● Champagne
1	5 742 75	● Soft Alu

Pack	Cat.Nos	Wireless motion sensor IP 44
1	5 742 52	Allows to control up to 20 wired switches, micromodules and socket outlets Easy pairing by tapping the wired products or by using the Home + Control App Supplied with 2 x AA battery For indoor and outdoor use Recommended distance between 2 sensors: 6 m Recommended installation height: 2.5 m Time delay adjustable from 15 s to 15 min Range: 8 m Detection angle: 140° Sensor range adjustable from 2 m to 8 m Light level threshold adjustable from 1 to 1000 lux Zigbee Certified Product
1	0 676 94	Wireless switch on/off module Allows to transform a mechanical 2-way switch or push-button into a wireless on/off switch. Small size for easy integration into the wall box To be paired with one connected switch, micromodule, socket outlet Supplied with CR2032 3V long-life battery for power supply Zigbee Certified Product

Connected home

connected wireless scene switches

Step 2: Connected products



5 742 15



5 742 70



5 742 08



5 742 73



5 743 12 + 5 750 10

Support frames and plates selection charts p. 92 to 97

Used to complete your connected installation. Require a prior connected installation including a gateway pack

Pack	Cat.Nos	Home/Away wireless switches Arteor™ with Netatmo
		Used to add an extra Home/Away wireless switch Works in the same way as the Home/Away wireless master switch included in the gateway pack Home/Away life scenes can be customised in the Home + Control App Supplied with CR2032 3 V long-life battery for power supply LED function for low battery indication Zigbee Certified Product
		Surface mounting version, 1 gang
		Supplied with multi-standard support frame (with removable fins) and 2 removable stickers for fixing the control unit on any substrate.
		To be equipped with 2-module plates (p. 92 to 97)
1	5 742 06	○ White
1	5 742 24	● Magnesium
1	5 742 33	● Champagne
1	5 742 15	● Soft Alu
		Flush-mounting version, 1 module
		Mechanisms to be equipped with support frames and plates (p. 92 to 97)
		Can be installed in a flush-mounting box depth 35 mm, in addition to wired products
1	5 742 70	○ White
1	5 742 79	● Magnesium
1	5 743 27	● Champagne
1	5 742 97	● Soft Alu



NETTRAIN1



NETATMO1

Pack	Cat.Nos	4 scenes wireless switches
		Used to add 4 customised scenes to a connected installation. Scenes can be customised in the Home + Control App Possibility to assign personalized names and to associate icons to the scenes in the Home + Control App Supplied with CR2032 3 V long-life battery for power supply Zigbee Certified Product
		Surface mounting version Arteor™ with Netatmo, 2 gang
		Supplied with multi-standard support frame (with removable fins) and 2 removable stickers for fixing the control unit on any substrate.
		To be equipped with 2-module plates (p. 92 to 97)
		LED function for low battery indication
1	5 743 12	○ White
1	5 743 14	● Magnesium
1	5 743 15	● Champagne
1	5 743 13	● Soft Alu
		Pocket remote control
1	0 676 95	Can be attached to a keyring ● Magnesium

		Wake up/Sleep wireless switches Arteor™ with Netatmo
		Used to add 2 extra scenes to a connected installation Preset Wake up/Sleep life scenes which can be customised in the Home + Control App Supplied with CR2032 3 V long-life battery for power supply LED function for low battery indication Zigbee Certified Product
		Surface mounting version, 1 gang
		Supplied with multi-standard support frame (with removable fins) and 2 removable stickers for fixing the control unit on any substrate.
		To be equipped with 2-module plates (p. 92 to 97)
1	5 742 08	○ White
1	5 742 26	● Magnesium
1	5 742 35	● Champagne
1	5 742 17	● Soft Alu
		Flush-mounting version, 1 module
		Mechanisms to be equipped with support frames and plates (p. 50 to 51)
		Can be installed in a flush-mounting box depth 35 mm, in addition to wired products
1	5 742 73	○ White
1	5 742 90	● Magnesium
1	5 743 28	● Champagne
1	5 742 98	● Soft Alu

Training Kit and Retail Starter Kits

Training Kit

Includes Technical Case with plug, Gateway Pack, Connected Light Switch, Wireless Switch, support frames and cover plates.

Retail Starter Kit

Includes Gateway Pack, Connected Light Switch, Wireless Switch, Connected Socket, support frames and cover plates.

- White
- Magnesium
- Soft Alu
- Champagne

Connected home

connected wireless curtain/roller blinds controls

Arteor™

blank modules

Step 2: Connected products



Home + Control
LEGRAND



5 742 25



5 742 74



5 728 41



5 700 60



Support frames and plates selection charts **p. 92 to 97**

Used to complete your connected installation. Require a prior connected installation including a gateway pack

Pack	Cat.Nos	
		Curtain/ roller blind wireless switches Arteor™ with Netatmo
		Used for remote control or centralization of up to 20 wired roller blind switches Pair by tapping the selected roller blind switch(es) or by using the Home + Control App Supplied with CR2032 3 V long-life battery for power supply LED function for low battery indication Zigbee Certified Product
		Surface mounting version, 1 gang
		Supplied with multi-standard support frame (with removable fins) and 2 removable stickers for fixing the control unit on any substrate To be equipped with 2-module plates (p. 92 to 97)
1	5 742 07	○ White
1	5 742 25	● Magnesium
1	5 742 34	● Champagne
1	5 742 16	● Soft Alu
		Flush-mounting version, 1 module
		Mechanisms to be equipped with support frames and plates (p. 92 to 97) Can be installed in a flush-mounting box depth 35 mm, in addition to wired products
1	5 742 74	○ White
1	5 742 95	● Magnesium
1	5 743 29	● Champagne
1	5 742 99	● Soft Alu
		Accessory
1	0 648 71	Pack of 3 x 4 extra removable stickers for fixing a wireless control



Support frame and plate selection charts **p. 92 to 97**

Pack	Cat.Nos	
		Blank modules
		1 module
10	5 723 41	○ White - square version
10	5 728 41	● Magnesium - square version
10	5 700 60	● Champagne - square version
10	5 710 60	● Soft Alu - square version
		2 modules
10	5 723 42	○ White - square version
10	5 728 42	● Magnesium - square version
10	5 700 61	● Champagne - square version
10	5 710 61	● Soft Alu - square version
		3 modules
5	5 723 43	○ White - square version
5	5 728 43	● Magnesium - square version
5	5 728 20	● Champagne - square version
5	5 728 19	● Soft Alu - square version

MyHOME_Up

BUS home system management




0 672 59





BT3488W




BTMYHOMESERVER1

Pack	Cat.Nos	Home Touch 7"
		HOME Touch  Connected 2 wire handsfree video internal unit integrated with MyHOME_Up system Allows to: - manage video door entry functions and connect Door Entry app (available for Android and iOS) - visualize the status and control MyHOME_Up system and integrated functions (light, automation, temperature, scenarios, Nuvo, ..) Flush mounting installation using the dedicated box ref. BT3487 Installation also possible in wall-mounting existing boxes Does not require dedicated configuration tools ● Black ○ White
1	0 672 59	
1	BT3488W	
1	BT3487	HOMETOUGH accessories
1	BT3487AP	Flush-mounting box for 7" touch screen Cat.No 0 672 59 Plasterboard bracket

Pack	Cat.Nos	Gateways
1	BTMYHOMESERVER1	Server To associate devices during the system starting-up and for the local and remote management of the functions by the user with the specific MyHOME_Up application for Android and iOS smartphones or tablets
1	BTMHSEVERKIT	Kit Containing MYHOMESERVER1 and AccessPoint for communication between the MyHOME_Up system to which it is connected, and a smartphone or tablet where the MyHome_Up App is installed
1	F450	Other devices Open/Bacnet Gateway  Interface for the remote control with Touch Screen of devices Bacnet as Fancoil units, AC units, ATU, VAV units floor heating
1	F459	Driver manager  Integration platform with other brand systems 6 DIN modules 17.5 mm Contact the agency to check the feasibility of specific integrations and to request the licence needed to use the Driver manager




MyHOME_Up and Door Entry app for Home Touch, available on APP Store and Google Play



MyHOME_Up

BUS home system management


MyHOME_Up

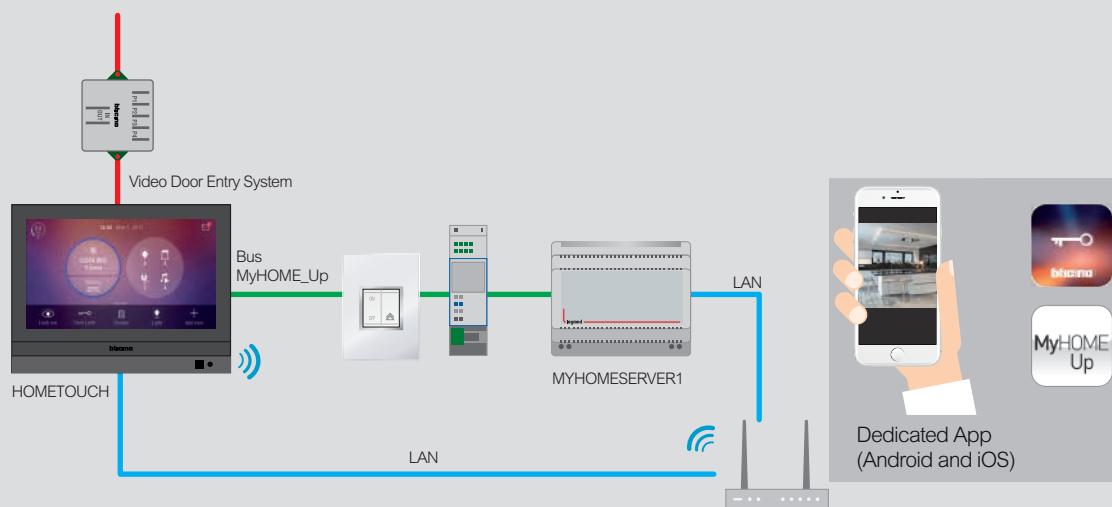

HOMETOUCH can be used as an internal unit for Video Door Entry System and touch screen for the MyHOME_Up system

Nota: HOMETOUCH connection to network can be done via LAN or via WiFi

HOMETOUCH as only Video Door Entry system internal unit

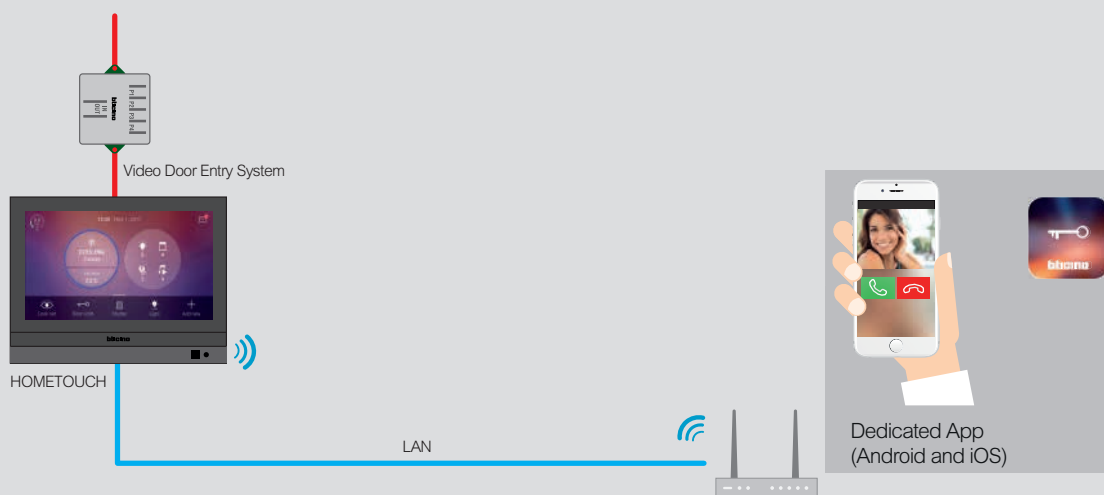

HOMETOUCH can be used also just as a Video Door Entry System internal unit

- + answering a call, opening gates and doors, activation of cameras, communication with other panels
- + connection with a dedicated app (Android and iOS)

Nota: HOMETOUCH connection to network can be done via LAN or via WiFi

MyHOME_Up

BUS flush-mounting control mechanisms



5 744 76 + Brushed Pink Champagne 5 714 27



0 675 58 + key covers 5 745 74 + 5 744 93 + plate Soft Alu 5 714 82



Key covers selection charts p. 108

Pack	Cat.Nos	For lighting and shutter control
1	0 675 52	For controlling a controller (eg: lighting, shutters or lighting + shutters) depending on the selected configuration Used to manage groups of functions and centralize them (scenario switch type) To be installed in flush-mounting boxes For controlling 1 or 2 controllers 2 modules To be equipped with key covers (p. 108) support frames and plates (p. 92 - 97)
1	0 675 54	For controlling up to 3 controllers 3 modules To be equipped with key covers (p. 108) support frames and plates (p. 92 - 97)
1	0 675 53	For multi-functions control For controlling 1 or 2 controllers (eg: ON/OFF, shutters, scenario control) door release control, dimming: gradual switching on or off depending on the selected configuration To be installed in flush-mounting boxes For controlling up to 4 scenarios 2 modules To be equipped with key covers (p. 108) support frames and plates (p. 92 - 97)
1	0 675 58	For advanced shutter Point-point, room, group, and general control of the motor controlled rolling shutters, to be used in conjunction with actuators Cat.Nos F401 (p. 110) or 0 675 57. Stop, up, down function Possibility of blade angle adjustment Recall of a previously saved opening/closing position. Recording of the opening/closing position on the control using self-learning procedure 2 modules To be equipped with key covers (p. 108): shutter STOP marking and up/down symbol, support frame and plate (p. 92 - 97)


Pack	Cat.Nos	Flush-mounting controller with built-in control for lighting and shutter
1	0 675 61	Actuator with 2 independent relays and 3 wires (with neutral) with built-in controls For single or double loads Used to connect a motor or 2 lighting circuits: 6 A incandescent/halogen lamps 2 A for motors, 2 A for ferromagnetic transformers and electronic transformer Compact fluorescent and LED: 1 A Logic relay interlocking by configuration The device can also be configured to manage a remote actuator, present on the BUS 2 modules To be equipped with key covers (p. 108) support frames and plates (p. 92 - 97)
1	0 675 57	Flush-mounting controller with built-in control for advanced shutter Max. motor power: 460 W, 230 VA Motors controlled by interlocking relays or by sending pulses Position status feedback: closed, open, intermediate position Controlled according to different commands: up, down or % opening Logic relay interlocking. Stop, up, down function Possibility of blade angle adjustment Recall of a previously saved opening/closing position. Recording of the opening/closing position on the control using self-learning procedure 2 modules To be equipped with key covers (p. 108): shutter STOP marking and up/down symbol, support frame and plate (p. 92 - 97)

MyHOME_Up

BUS touch screens



5 739 07



5 739 12

Supplied complete, equipped with white or black touch plates

Pack	Cat.Nos	Touch control mechanisms
		For controlling 1 or 2 controllers (eg: ON/OFF, shutters, scenario control) sound system, door release control, dimming: gradual switching on or off depending on the selected configuration To be installed in flush-mounting boxes
		Control up to 4 scenarios 2 modules
1	5 739 04	○ White - for BS flush-mounting boxes
1	5 739 05	● Black - for BS flush-mounting boxes
		Control up to 6 scenarios 3 modules
1	5 739 06	○ White - for 2"x 4" flush-mounting boxes
1	5 739 07	● Black - for 2"x 4" flush-mounting boxes
		Control up to 6 scenarios 3 modules
1	5 739 12	○ White
1	5 739 13	● Black

MyHOME_Up

BUS scenario controllers



5 755 04 (for example scenario TV/
RELAX SLEEP/PARTY) + plate
Brushed Gold Brass 5 764 30



0 675 92 + plate Mirror
Black 5 752 53

Key covers selection charts **p. 108**

Pack	Cat.Nos	Scenario controllers
		For controlling a number of controllers and managing 4 scenarios Supplied complete with scenario identification label Equipped with cover plates 2 modules To be equipped with support frames and plates (p. 92 - 97)
1	5 745 03	○ White - square version
1	5 745 04	● Magnesium - square version
		8 push-buttons control For lighting, automation, sound diffusion and scenario functions To be equipped with support frame and plates (p. 92 - 97) 2 modules
1	0 675 92	A5 sheets For the customisation of the symbols of Cat.No 0 675 92
1	0 675 96	○ White
1	0 675 95	● Magnesium

MyHOME_Up

BUS key cover selection charts



5 744 86



5 744 81



5 744 76



5 744 79



5 744 69



5 744 80

Compatible with all Arteor control mechanisms (p. 104)

Key cover description	Pack	Number of modules	SQUARE VERSION		
				White ○	Magnesium ●
Regulation symbol left-hand side mounting	5	1		5 744 87	5 744 86
Regulation symbol right-hand side mounting	5	1			
Regulation symbol	5	2		5 744 89	5 744 88
Light symbol any side mounting	5	1		5 744 75	5 744 74
Light symbol	5	2		5 744 77	5 744 76
Dimmer symbol left-hand side mounting	5	1		5 744 69	5 744 68
Dimmer symbol right-hand side mounting	5	1			
Dimmer symbol	5	2		5 744 71	5 744 70
Up/Down symbol any side mounting	5	1		5 744 93	5 744 92
Up/Down symbol	5	2		5 744 95	5 744 94
GEN marking	5	2		5 744 73	5 744 72
GEN/ON/OFF marking left-hand side mounting	5	1		5 744 83	5 744 82
GEN/ON/OFF marking right-hand side mounting	5	1			
GEN/ON/OFF marking	5	2		5 744 85	5 744 84
ON/OFF marking left-hand side mounting	5	1		5 744 79	5 744 78
ON/OFF marking right-hand side mounting	5	1			
ON/OFF marking	5	2		5 744 81	5 744 80
Shutter STOP marking any side mounting	5	1		5 745 47	5 745 48
Without marking any side mounting	5	1		5 744 65	5 744 64
Without marking	5	2		5 744 67	5 744 66

THE FINISHING TOUCH

ARTEOR™ MyHOME_Up

— The Beautiful Simplicity of Home Automation —

Put the finishing touch to your homes with the HOMETOUCH screen. Get total control of your home with just a touch.



MyHOME_Up

BUS modular equipment for lighting control automation and shutter control



F411U2



F411/4



BMSW1003



Load selection charts **p. 111**

Pack	Cat.Nos	Multi-application DIN controllers
1	F411U2	NO contact For lighting and motors 2 DIN modules 17.5 mm
1	F411/4	2 outputs 10 A with neutral connection
1	F411/1NC	4 output 6 A - common phase Controller with 1 NO/NC relay For lighting: 16 A resistive, 10 A incandescent lamps, 4 A cos ϕ 0.5 for ferromagnetic transformers and 4 A for fluorescent lamps with 2 DIN modules
1	F418U2	DIN controllers for dimming For use in conjunction with loads and control mechanisms (p. 104) for dimming control For dimmable LEDs and CFL (Compact Fluorescent Lamps) incandescent, halogen lamps and electronic transformers 2 outputs - loads with separate channels: 1-300 VA / 230 V or 1-150 VA / 110 V - loads with parallelized channels: 2-600 VA / 230 V or 2-300 VA / 110 V
1	0 026 27	6 outputs - 300 VA per output - 230 V - 12 DIN modules 17.5 mm - Not CE marked
1	F413N	For 1-10 V ballasts 500 VA maximum 2 DIN modules 17.5 mm
1	BMDI1002	4 outputs - 1000 VA maximum 10 DIN modules 17.5 mm
1	0 026 33	For DALI protocol Enables communication between the BUS/SCS installation and the lighting appliances controlled by DALI protocol 6 DIN modules 17.5 mm
1	F461U1	For incandescent, halogen 230 V, ELV halogen with electronic or ferromagnetic transformer 6 DIN modules 17.5 mm Automatic recognition of the load 1 output - 1000 W maximum
1	BMSW1003	DIN on/off lighting controllers For lighting (commercial sector) 4 outputs 16 A 6 DIN modules 17.5 mm
1	BMSW1005	8 outputs 16 A 10 DIN modules 17.5 mm

Pack	Cat.Nos	2-relay controller for driving a motor
1	F401	Relay interlocking or pulse based motor drive Position status return: closed, open, intermediate position. Drive following different orders: up, down, or opening Maximum motor power: 460 W, 230 VA Logic relay interlocking 2 DIN modules 17.5 mm
10	0 488 72	RJ adaptor For connecting Cat.Nos BMSW1003, BMSW1005, F461U1, BMDI1002 to the BUS Male connector
1	F428	Contact interfaces Allow the connection between traditional wiring devices such as switches, time delay switches or external sensors 2 independent contacts 2 DIN modules 17.5 mm
1	3477	Basic modularity to be installed in flush-mounting box
1	3476	Basic module controller For lighting: 2 A resistive or incandescent lamps and 2 A cos ϕ 0.5 for ferromagnetic transformers Controller/control unit with 1 relay with an input for conventional push-button with NO contact

MyHOME_Up

BUS load selection chart

Actuators and dimmers max. loads at 230 V

Cat.Nos	Installation factor	Incandescent lamp Halogen lamp	ELV halogen with ferromagnetic transformer	ELV halogen with electronic transformer	Fluorescent tube lamp	Compact fluorescent lamp	LED lamps	Lamps with 0-10 V ballast	Lamps with DALI ballast	Motors
ACTUATORS	F411U2	2 DIN	2x2300 W	2x920 VA	2x920 VA	2x920 W	2x500 W	2x500 W	-	1x460 W
	F411/4	2 DIN	4x460 W	4x460 VA	4x70 VA	4x70 W	4x70 W max 2 lamps	4x70 VA max 2 lamps	-	2x460 W
	F411/1NC	2 DIN	1x2300 W	1x920 VA	1x920 W	1x920 W	1x500 W max 10 lamps	1x500 W max 10 lamps	-	-
	BMSW1003	6 DIN	4x3680 W	4x3680 VA	4x3680 VA	4x [10x(2x36 W)]	4x1150 VA	4x500 W	-	-
	BMSW1005	10 DIN	8x3680 W	8x3680 VA	8x3680 VA	8x [10x(2x36 W)]	8x1150 VA	8x500 W	-	-
	F401	2 DIN	-	-	-	-	-	-	-	1x460 W
	0 675 61	2 modules	2x1380 W	2x460 VA	2x460 W	2x460 W	2x250 W	2x250 W	-	1x460 W
	0 675 57	2 modules	-	-	-	-	-	-	-	1x460 W
	3476	-	1x460W	1x460 VA	-	-	1x40 W (1 lamp)	1x40 W (1 lamp)	-	-
DIMMERS	F413N	2 DIN	-	-	-	-	-	1x460 W ballast type T5, T8, compact or driver for LED	-	-
	BMDI1002	10 DIN	-	-	-	-	-	4x1000 VA	-	-
	0 026 33	6 DIN	-	-	-	-	-	-	8x16 ballasts	-
	F461U1	6 DIN	1x1000 W	1x1000 VA	1x1000 VA	-	-	-	-	-
	F418U2	4 DIN	2x300 W 1x600 W	2x300 VA 1x600 VA	2x300 VA 1x600 VA	-	2x300 VA 1x600 VA	2x300 VA 1x600 VA	-	-
	0 026 27	12 DIN	6x300 VA	-	-	-	6x300 VA	6x300 VA	-	-

Actuators and dimmers max. loads at 110 V

Cat.Nos	Installation factor	Incandescent lamp Halogen lamp	ELV halogen with ferromagnetic transformer	ELV halogen with electronic transformer	Fluorescent tube lamp	Compact fluorescent lamp	LED lamps	Lamps with 0-10 V ballast	Lamps with DALI ballast	Motors
ACTUATORS	F411U2	2 DIN	2x1100 W	2x440 VA	2x440 VA	2x440 VA	2x 250 W	2x250 W	-	1x250 W
	F411/4	2 DIN	4x220 W	4x220 VA	4x35 VA	4x35 W	4x 35 W max 2 lamps	4x35 W max 2 lamps	-	2x220 W
	F411/1NC	2 DIN	1x1100 W	1x440 VA	1x440 W	1x440 W	1x 250 W max 5 lamps	1x250 W max 5 lamps	-	-
	BMSW1003	6 DIN	4x1760 W	4x1760 VA	4x1760 VA	4x [5x(2x36 W)]	4x 550 VA	4x250 W	-	-
	BMSW1005	10 DIN	8x1760 W	8x1760 VA	8x1760 VA	8x [5x(2x36 W)]	8x 550 VA	8x250 W	-	-
	F401	2 DIN	-	-	-	-	-	-	-	1x220 W
	0 675 61	2 modules	2x660 W	2x220 VA	2x220 W	2x220 W	2x 110 W	2x110 W	-	1x250 W
	0 675 57	2 modules	-	-	-	-	-	-	-	1x220 W
	3476	-	1x230 W	1x230 VA	-	-	1x 20 W (1 lamp)	1x20 W (1 lamp)	-	-
DIMMERS	F413N	2 DIN	-	-	-	-	-	1x220 W ballast type T5, T8, compact or driver for LED	-	-
	0 026 11	6 DIN	-	-	-	-	-	1x500 VA	-	-
	BMDI1002	10 DIN	-	-	-	-	-	4x500 VA	-	-
	0 026 33	6 DIN	-	-	-	-	-	-	8x16 ballasts	-
	F461U1	6 DIN	1x500 W	1x500 VA	1x500 VA	-	-	-	-	-
	F418U2	4 DIN	2x150 W 1x300 W	2x150 VA 1x300 VA	2x150 VA 1x300 VA	-	2x150 VA 1x300 VA	2x150 VA 1x300 VA	-	-



0 488 20



0 488 34



0 488 22





5 740 48 + plate Champagne
5 715 02

Check presence and light level continuously, switch off when there is sufficient natural light

Automatic switch-on/off (factory setting)

Connect to controllers by cord or RJ 45 cable or BUS/SCS cable to be fitted with RJ 45 connector Cat.No. 0 488 72








Pack	Cat.Nos	Sensors ideal for passage areas
1	0 488 20	PIR technology ceiling-mounting lighting management sensor, 360° Range 8 m IP 20 Optimum distance between 2 sensors: 6 m Consumption: 0.2 W on standby Fixes directly to a false ceiling with mounting claws (included) or installed in a Batibox box, depth 50 mm Can be surface-mounted on ceiling using accessory Cat.No 0 488 75
10	0 488 34	PIR technology wall/surface-mounting lighting management sensor, 180° Detection: 6 x 15 front range IP 55 Consumption: 0.5 W on standby For direct surface-mounting on wall Can be mounted on an angle using accessory Cat.No 0 488 71
1	0 488 22	Sensors ideal for working areas Dual technology ceiling-mounting lighting management sensors, 360° Infrared and ultrasonic detection, range Ø 8m Recommended fixing height: 2.5 m IP 20 Optimum distance between 2 sensors: 6 m Consumption: 0.5 W on standby Fixes directly to a false ceiling with mounting claws (included) or installed in a Batibox box, depth 50 mm Can be surface-mounted on ceiling using accessory Cat.No 0 488 75
1	0 488 75	Surface-mounting boxes For ceiling-mounting sensors. Cat.Nos 0 488 04/06/07/09/17/20 and 0 489 18/19/35/36
1	0 489 71	Fixing accessories for angled installations For surface-mounting sensors Cat.Nos 0 488 34 and 0 489 14/16/17/18/20

Pack	Cat.Nos	Arteor 180° motion sensors
1	5 740 46	Automatic sensors with passive IR presence sensor and light sensor Range 8 m for an installation height of 1.2 m Time delay before switch-off and adjustable light level 2 modules IP 41 Consumption 0.3 W on standby
1	5 740 96	PIR motion sensor To be equipped with support frame and plate (p. 92-97)  ○ White ● Magnesium
1	5 740 48	Arteor 180° dual technology presence sensor Automatic sensors with integrated push-button Dual technology passive IR and ultrasonic presence sensor Light sensor Range 8 m for an installation height of 1.2 m Time delay before switch-off and adjustable light level 2 modules IP 41 Consumption 0.5 W on standby
1	5 740 98	Dual technology presence sensor To be equipped with support frame and plate (p. 92-97)  ○ White ● Magnesium

MyHOME_Up

BUS energy management



Pack	Cat.Nos	Consumption indicators	Pack	Cat.Nos	Load and load shedding management
1	3522N	Pulse counter interface  <p>Used to store data from a pulse counter (water, colorimetry, heat or gas) In countries subject to the ATEX Directive it's mandatory to use a zener barrier/galvanic insulation barrier between the pulse counter interface and the gas meter The barrier must comply with the ATEX directive and must be installed outside the ATEX zone Install one pulse counter interface per meter to measure the consumption individually Consumption data stored hour by hour, and kept for several years (12 years) Display can be in the form of histograms or statistical data</p>	1	F521	Central control unit  <p>Used to define an energy threshold and manage load shedding priorities set on controllers to avoid unwanted interruptions as a result of exceeding the energy contract Manages up to 63 controllers The max. authorised power threshold can be defined The settings can be activated/deactivated from the touch screen Instantaneous and cumulative display of circuit consumption on the touch screen Integrated memory module For installation in the consumer unit 1 DIN module 17.5 mm</p>
1	F520	Consumption indicator for 3 circuits  <p>For single phase installations Supplied with a toroid and its link Each toroid can monitor one circuit The consumption indicator can take up to 3 toroids, for monitoring 3 separate circuits Several consumption indicators can be installed to monitor more than 3 circuits on the installation. Instantaneous and cumulative display of the consumption for each circuit and display of consumption on touch screens Display can be in the form of histograms or statistical data Consumption data can be stored for 1 year, hour by hour, 2 years day by day or 12 years month by month</p>	1	F523	16 A controller  <p>Used to define a priority level for a circuit in the context of a load shedding function For installation in the consumer unit 1 DIN module 17.5 mm Can be used as an electronic control box controller and/or an energy management controller</p>
1	3523	Additional toroid  <p>Operates with consumption indicator Cat.No 0 035 55 Also operates with controller Cat.No F522 for load diagnostics 90 A max. Cable cross-section 25 mm² max.</p>	1	F522	16 A controller with consumption measurement  <p>Used to define a priority level for a circuit in the context of a load shedding function For installation in the consumer unit 1 DIN module 17.5 mm Can be used as an electronic control box controller and/or an energy management controller Measures the consumption of the load being controlled and displays instantaneous and cumulative consumption with separate reset Diagnostics of the load being controlled with use of toroid Cat.No 3523</p>
10	3508BUS	Connectors Spare parts for consumption indicator Cat.No F520 and controllers Cat.Nos F521, F523 and F522 			
10	3508U2				
10	3508U3				

MyHOME_Up

BUS temperature control



0 674 59 + Reflective Silver
5 714 37



BT3454

Pack Cat.Nos Arteor display thermostats

1	0 674 59	<p>Flush mounting thermostat with backlit display Can be used to control the temperature of an individual zone Features a temperature probe and an input for connecting a contact line (e.g. window contact) Can be used to manage different types of systems, and to adjust the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems 2 modules</p> <p>To be equipped with support frame and plates (p. 92-97)</p>
1	BT3454	<p>Temperature probe Temperature interface with input for external sensors. Can work as master and slave probe Compatible with external temperature sensors Cat.No BT3457 and Vantage VT-FLUSHSENSOR</p>
1	F430/2	<p>DIN rail actuators 100/240 VA - 50/60 Hz Actuator with 2 independent relays For single and double loads: 6 A resistive, 3 A motorised valves and pumps 2 DIN modules 17.5 mm</p>
1	F430/4	<p>Actuator with 4 independent relays For single, double or mixed loads: 6 A resistive, 3 A motorised valves, pumps and fan-coils 2 DIN modules 17.5 mm</p>
1	F430R8	<p>DIN actuators for the control of ON/OFF valves, motorised valves, pumps and fan coils with 0-10V proportional valves Actuator with 8 independent relays for the control of on-off valves, motorised valves (open-close and three-point valves), pumps and fan coils with 2 and 4 tubes 4 A resistive, 1 A motorised valves, pumps and fan coils 4 DIN modules 17.5 mm</p>
1	F430R3V10	<p>Actuator with 3 independent relays and 2 x 0-10 Volt outputs for the control of fan coils with 2 and 4 tubes with 0-10 Volt proportional valves 4 A resistive, 1 A fan coils 4 DIN modules 17.5 mm</p>
1	F430V10	<p>Actuator with 2 x 0-10 Volt outputs for the control of 0-10 V proportional valves 2 DIN modules 17.5 mm</p>

MyHOME_Up

BUS common accessories



E46ADCN



F425



F422

Load selection charts p. 109

Pack Cat.Nos BUS power supplies

1	E46ADCN	<p>27 V= - 1.2 A Maximum consumption: 300 mA Maximum current supplied: 1.2 A 8 DIN modules 17.5 mm Input voltage: 230 VA - output voltage 27 V= Input voltage: 127 VA - output voltage 27 V=</p>
1	E49	<p>27 V= - 0.6 A Maximum current supplied: 0.6 A 2 DIN modules 17.5 mm Input voltage: 230 VA - output voltage 27 V=</p>
1	346020	<p>Additional power supply Provides power for Webserver 2 DIN modules 17.5 mm</p>

Pack Cat.Nos BUS/SCS cables

1	L4669	<p>Conform to IEC 45-5 and IEC 20-20 Grey Length 100 m</p>
1	L4669/500	<p>Length 500 m</p>
1	L4669KM1	<p>Length 1000 m Supplied on wooden reels</p>

Pack Cat.Nos BUS spare clamp

10	3515	<p>Used to connect the various system components (controls, dimmers, etc) to the BUS line Male connector</p>
----	------	--

Pack Cat.Nos USB cable

1	3559	<p>Programming cable</p>
---	------	--------------------------








Pack Cat.Nos Additional DIN devices

1	F425	<p>Memory module for actuators Restore the last state of an actuator in case of a power failure 2 DIN modules 17.5 mm</p>
1	F422	<p>SCS-SCS gateway (extension) Allows the extension of the installation or the integration between different functions Suitable for larger installations 2 DIN modules 17.5 mm</p>

Other devices MyHOME™




These products cannot be used to configure MyHOME_Up

Pack	Cat.Nos	Plug-in jumpers	Pack	Cat.Nos	Local management
		Jumpers Used to associate an address with the different system components			MyHOME screen 3.5"  3.5" colour touch screen for the management of light functions, automation, burglar alarm, temperature control, sound system, scenarios and energy management. Equipped with front panel USB connector for setup and ready for Open Webnet programming language. To be installed in flush-mounting box Cat.Nos 0 892 79 or 0 893 79 Equipped with surround, to be equipped with special plates (p. 94-95)
1	3501/0	0	1	5 739 58	MyHOME screen 10" 10" LCD capacitive touch screen used for: - management of MyHOME, Nuvo and video door entry system - management of multimedia contents (Ethernet, USB, SD card) - management of customised profiles Navigation by rooms Possibility of customizing background images Wall-mounting installation Supplied complete with plates Requires power supply unit Cat.No 3 460 20
1	3501/1	1	1	0 672 19	 ○ White ● Black
1	3501/2	2	1	0 672 28	
1	3501/3	3			
1	3501/4	4			
1	3501/5	5			
1	3501/6	6			
1	3501/7	7			
1	3501/8	8			
1	3501/9	9			
1	3501/GEN	GEN			
1	3501/GR	GR			
1	3501/AMB	AMB			
1	3501/AUX	AUX			
1	3501/ON	ON			
1	3501/OFF	OFF			
1	3501/O/I	O/I			
1	3501/PUL	PUL			
1	3501/SLA	SLA			
1	3501/CEN	CEN			
1	3501/T	↑↓			
1	3501/TM	↑↓M			
1	3501K/1	Kit with: AUX, GEN, GR, AMB, ON, OFF, O/I, PUL, SLA, CEN, ↑↓, ↑↓M (10 pieces of each figure) Kit with «0 to 9» jumpers (10 of each number)			
1	3501K				
1	3502	Plier Plier for plug-in jumpers			
		Central units for temperature control Equipped with square version keypad cover plates To be equipped with special plates (p. 94-95) Supplied with flush-mounting box and 7.2 V battery Cat.No 3506 Can manage up to 99 zones ○ White ● Magnesium 			
1	5 739 18		1	F454	Remote management Web server gateway TCP-IP  Audio/video web server for the remote and local control of the system using web pages or specific software programs and apps. The device can operate as a gateway for the use of the MyHOME_Suite software 6 DIN modules
1	5 739 19		1	F455	MyHOME gateway  Gateway device for remote and local management of the MyHOME system using specific software programs and apps Can also be used as gateway for virtual configuration of devices using MyHOME_Suite 1 DIN module
1	3550	Central unit for temperature control  Central unit for the management of a temperature control system with up to 99 zones - the product also includes the TiThermo Basic software for programming from PC - wall mounted installation or in MULTIBOX enclosures	1	MHVISUAL	Other devices Supervision software Can be used in order to tune up the system's functions through a computer, and to follow them on real time basis
1	3506	Battery for temperature control central unit 7.2 V battery for central unit	1	MH202	Scenario programmer  Device for the execution of scenarios programmed using MyHOME_Suite software. The scenario may be combined with times and dates, manual activations, events generated by the systems


Guest room management system

ENTRANCE AREA

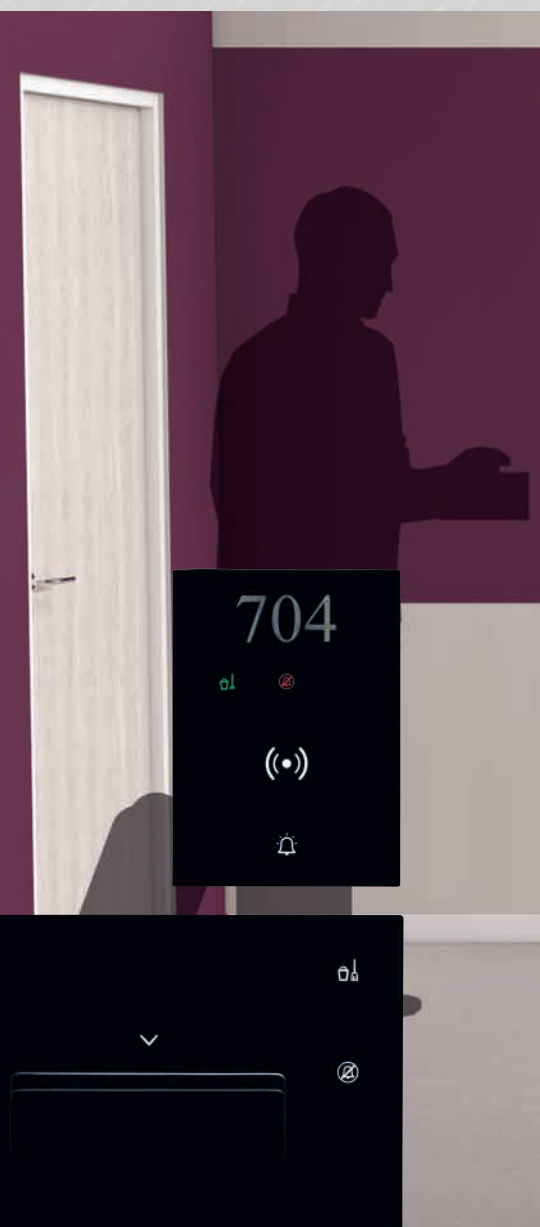

EXTERNAL INDICATOR WITH ACCESS CONTROL READER, KEY CARD HOLDER AND DND-MUR CONTROL

LIVING AREA

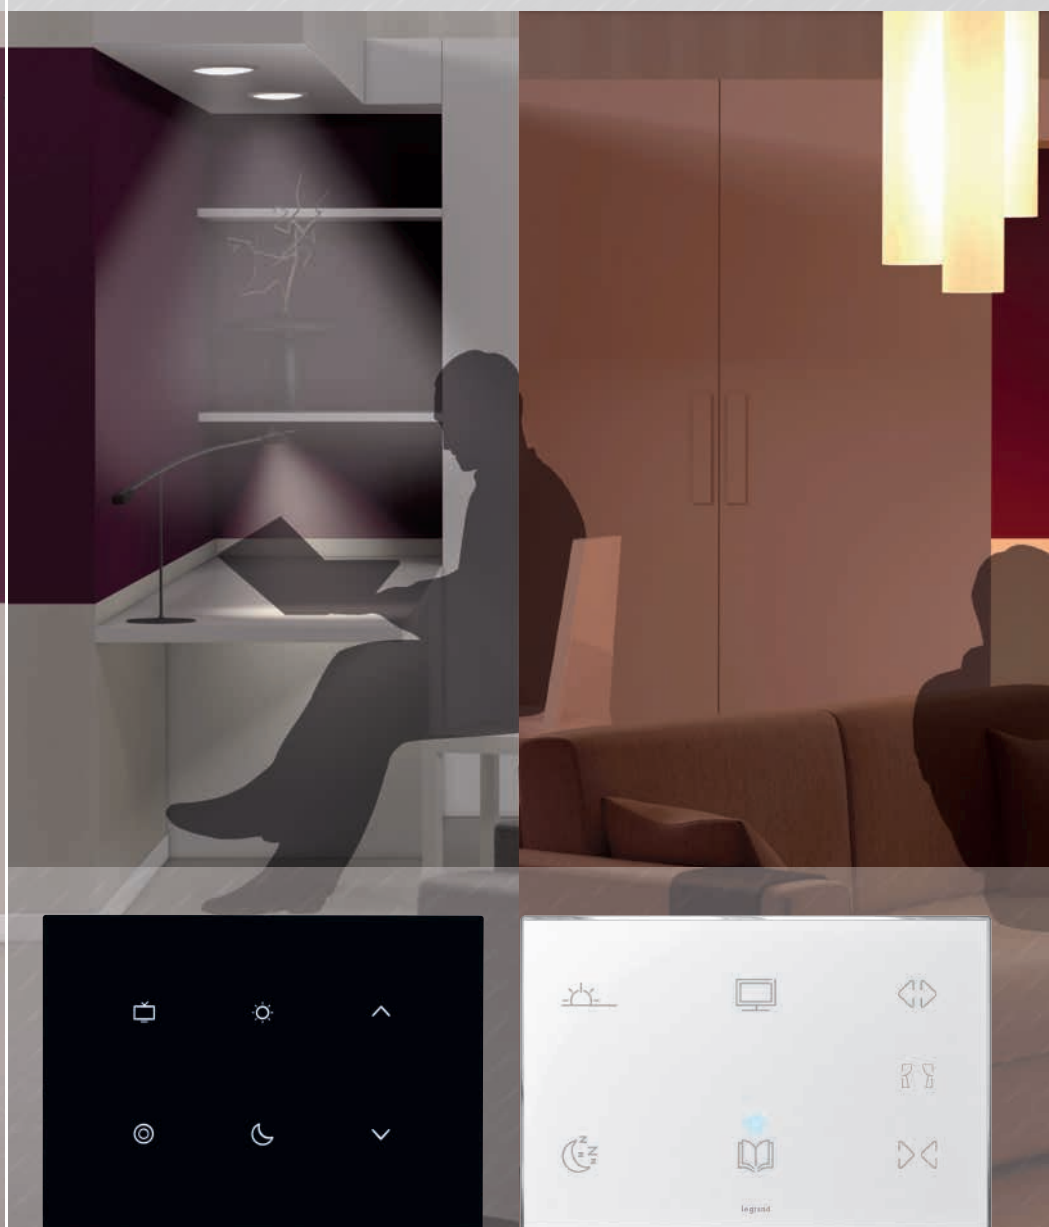


6-SCENE TOUCH CONTROL

6-SCENE TOUCH CONTROL




SLEEPING AREA

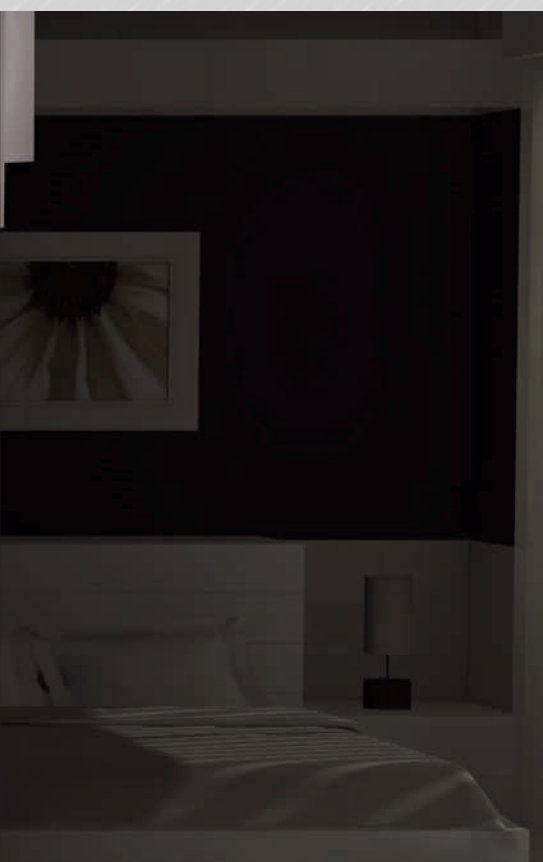


Thanks to the Legrand Guest Room Management System, different scenes can be set in each guest room for a new and unique experience.

The objective is to consistently satisfy guests' needs and expectations in their rooms. They will appreciate the ability to control the lighting, the curtains, the temperature and the fan control unit easily through the user friendly interfaces. Using Legrand multimedia connectivity solutions, your guests will be able to connect and use their high-tech equipment in their rooms.

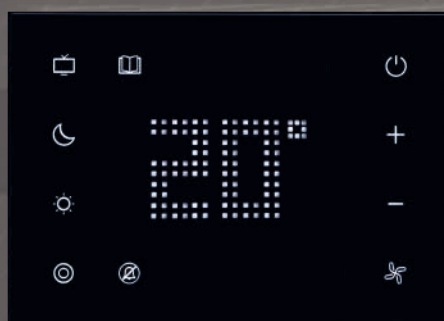

BEDSIDE PANEL WITH 6 SCENES AND TEMPERATURE CONTROL

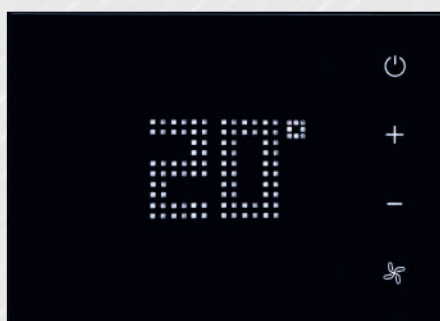

DIGITAL THERMOSTAT

> **Arteor** version (p. 116)





5 740 89



0 675 92 + plate
Mirror Black 5 752 53



0 674 59 + Brushed Pink
Champagne 5 714 27



5 739 07

Support frame and plate selection charts **p. 92-97**

Pack	Cat.Nos	Touch control scenario controllers
1	5 740 89	4-scene touch control - 4 scenarios "wake up / sleep / TV / relax" scenarios - 2 modules Touch control plates, supplied complete, to be installed in BS flush-mounting boxes ○ White ● Black
1	5 745 89	
		Scenario controller 8 push-buttons control for lighting, automation, sound diffusion and scenario functions For controlling a number of controllers and managing 4 scenarios 4 scenarios 2 modules Equipped with cover plates Supplied complete with scenario identification label To be equipped with support frame and plates (p. 92 - 97)
1	0 675 92	
		Accessories A5 sheets For the customisation of the symbols of Cat.No 0 675 92 ○ White ● Magnesium
1	0 675 96	
1	0 675 95	

Pack	Cat.Nos	Multi-functions touch control mechanisms
		For controlling 1 or 2 controllers (eg: ON/OFF, shutters, scenario control) sound system, door release control, dimming: gradual switching on or off depending on the selected configuration Supplied complete, equipped with white or black touch plates To be installed in flush-mounting boxes Up to 4 scenarios - 2 modules ○ White - for BS flush-mounting boxes ● Black - for BS flush-mounting boxes
1	5 739 04	○ White - for 2"x 4" flush-mounting boxes ● Black - for 2"x 4" flush-mounting boxes
1	5 739 05	
1	5 739 06	○ White - for 2"x 4" flush-mounting boxes ● Black - for 2"x 4" flush-mounting boxes
1	5 739 07	
		Up to 6 scenarios - 3 modules For installation in BS, Italian or US flush-mounting boxes ○ White ● Black
1	5 739 12	○ White ● Black
1	5 739 13	
		Display thermostat Flush mounted thermostat with backlit display. To be equipped with Arteor support frame and plates (p. 92-97) Can be used to control the temperature of an individual zone, both if a temperature central unit is and is not present. Features a temperature probe and an input for the connection of a contact line (e.g. window contact). Can be used for the management of different types of systems, and the adjustment of the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems 2 modules
1	0 674 59	



Hotel equipment

Arteor BUS (continued)



0 675 90 + plate Mirror Black
5 752 53



0 675 93 + key plate
5 743 97 + plate Mirror White 5 752 54



Support frame and plate selection charts **p. 92-97**

Pack	Cat.Nos	Keycard switches BUS/SCS
1	5 722 35	<p>Equipped with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92-97) For energizing a circuit by inserting a key fob Time delay of approx. 30 sec. after card removal Lighting of the slot by LED 2 modules</p> <p>Mechanical keycard switch</p> <p>○ White ● Magnesium</p> <p>RFID keycard switch</p> <p>Only works with ISO 13.56 MHz badges</p> <p>○ White ● Magnesium</p>
1	5 727 35	
1	5 722 36	<p>DO NOT DISTURB – MAKE UP THE ROOM control indicators</p> <p>To be equipped with support frames (p. 88) and plates (p. 92-97)</p> <p>External indicator and bell pushbutton External indicator and bell pushbutton + badge reader</p>
1	5 727 36	
1	0 675 90	<p>DO NOT DISTURB – MAKE UP ROOM mechanism to be equipped</p> <p>Mechanism</p> <p>2 modules To be equipped with key cover, support frames (p. 88) and plates (p. 92 - 97)</p> <p>Cover plates with DO NOT DISTURB symbol - 2 modules</p> <p>○ White ● Magnesium</p> <p>Couple of cover plates with DO NOT DISTURB symbol and MAKE UP ROOM symbol</p> <p>○ White ● Magnesium</p>
5	5 743 48	
5	5 743 49	
2	5 743 96	
2	5 743 97	

Hotel equipment

equipment for reception, room and infrastructure



348402



MH201




F458

Pack	Cat.Nos	Reception products
5	0 675 89	<p>Badge - key card</p> <p>Credit card shaped badge (ISO 50 x 80 mm) It uses transponder technology with frequency 13.56 MHz To be used with programmer Cat.No 348402 The badge can be customized and is sold in packs of 10</p>
1	348402	<p>Programmer</p> <p>Desk device to be connected to the PC (at the reception) to program badges</p>
1	MH201	<p>Room products</p> <p>IP scenario module</p> <p>Manages scenarios related to hotel rooms (With basic time and logic conditions) Works as a gateway for the Configuration software</p> <p>Bacnet Room Controller Units</p> <p>Power modules equipped with output contacts for controlling: - different types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.) - a DALI dimming output for 64 ballasts max. Loads are managed by the controls to which they are linked: either by BUS SCS controls, or by wired connection input terminals (switches, push-buttons, volt-free contacts) 8 inputs - 10 outputs 8 DIN modules 17.5 mm 16 inputs - 16 outputs 12 DIN modules 17.5 mm</p>
1	0 484 08	<p>Infrastructure products</p> <p>To be associated with Cat.No MH201</p> <p>IP server</p> <p>To be used in systems with over 100 rooms or zones (over 100 Cat.Nos 0 035 96 installed) 6 DIN modules 17.5 mm</p> <p>Driver manager</p> <p>Integration platform with other brand systems 6 DIN modules 17.5 mm Contact the agency to check the feasibility of specific integrations and to request the licence needed to use the Driver manager</p> <p>Softwares</p> <p>Software for the monitoring of the status of the room, for the corresponding basic management and the programming of badges For hotels with up to 20 rooms For hotels over 20 rooms</p>
1	0 484 12	
1	F458	
1	F459	
1	3544SW	
1	3546SW	



0 487 77



0 487 74



0 487 72



0 487 73

Pack	Cat.Nos	Scenario controllers
1	0 487 77	To be equipped with support frame Cat.No 0 487 79 (p. 121) 2-scene and DO NOT DISTURB – MAKE UP ROOM activation 4 gang touch plate wake up, sleep, DO NOT DISTURB – MAKE UP ROOM ● Black
1	0 487 74	6-scene activation 6 gang touch plate wake up, sleep, TV, Master OFF, Open/close curtains ● Black

Pack	Cat.Nos	Bedside panel BUS/SCS
1	0 487 72	Temperature control, DO NOT DISTURB activation and 5 scenes controls (Master OFF, wake up, sleep, TV, reading) To be equipped with support frame Cat.No 0 487 79 (p 121) ● Black
1	0 487 73	Display thermostat ● Black Features a temperature and humidity probe and an input for connecting a contact line (e.g. window contact) Can be used to manage different types of systems, and to adjust the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems To be equipped with support frame Cat. No 0 487 79

Product customisation possible using software available on www.uxforupscalehotel.legrand.com




Hotel equipment - user interfaces

BUS (continued)



Hotel equipment

equipment for reception, room and infrastructure

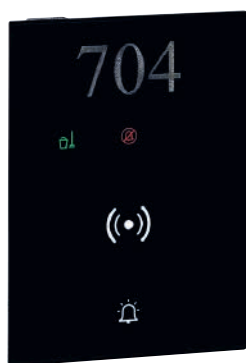

0 487 76



0 487 70



348402



MH201



F458

Pack	Cat.Nos	Control indicators for room management
1	0 487 75	To be equipped with support frame Cat.No 0 487 79 DO NOT DISTURB – MAKE UP ROOM external indicator and bell push-button ● Black
1	0 487 76	DO NOT DISTURB – MAKE UP ROOM external indicator and bell push-button + badge reader ● Black
1	0 487 78	Movement detector PIR sensor for virtual key-card function To be installed in false ceiling Ø20 mm It detects guest presence and activates room functions
1	0 487 70	Keycard switches BUS/SCS DO NOT DISTURB – MAKE UP ROOM activation 2 modules To be equipped with support frame Cat.No 0 487 79 Keycard reader with badge discrimination (guest or staff) ● Black Enable launching of different actions depending on guest or staff incoming
1	0 487 71	Keycard holder Only works with ISO 13.56 MHz badges ● Black
1	0 487 79	Accessories Support frame For flush mounting in 2 and 3 modules flush-mounting boxes
1	0 487 88	Flush mounting accessory For extra-slim flush-mounting installation (e.g. furniture) Replace use of support frame Cat.No 0 487 79

Pack	Cat.Nos	Reception products
5	0 675 89	Badge - key card Credit card shaped badge (ISO 50 x 80 mm) It uses transponder technology with frequency 13.56 MHz To be used with programmer Cat.No 348402 The badge can be customized and is sold in packs of 10
1	348402	Programmer Desk device to be connected to the PC (at the reception) to program badges
1	MH201	Room products IP scenario module Manages scenarios related to hotel rooms (With basic time and logic conditions) Works as a gateway for the Configuration software
1	0 484 08	Bacnet Room Controller Units Power modules equipped with output contacts for controlling: - different types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.) - a DALI dimming output for 64 ballasts max. Loads are managed by the controls to which they are linked: either by BUS SCS controls, or by wired connection input terminals (switches, push-buttons, volt-free contacts) 8 inputs - 10 outputs 8 DIN modules 17.5 mm
1	0 484 12	16 inputs - 16 outputs 12 DIN modules 17.5 mm
1	F458	Infrastructure products To be associated with Cat.No MH201 IP server To be used in systems with over 100 rooms or zones (over 100 Cat.Nos 0 035 96 installed) 6 DIN modules 17.5 mm
1	F459	Driver manager Integration platform with other brand systems 6 DIN modules 17.5 mm Contact the agency to check the feasibility of specific integrations and to request the licence needed to use the Driver manager
1	3544SW	Softwares Software for the monitoring of the status of the room, for the corresponding basic management and the programming of badges For hotels with up to 20 rooms
1	3546SW	For hotels over 20 rooms



5 735 12



0 490 31



0 674 64 + Brushed Black 5 714 17

Support frame and plate selection charts **p. 92-97**
Key covers selection chart **p. 108**

Directly connected to the KNX BUS (supplied with KNX connectors)
Programming through ETS software

Pack	Cat.Nos	Arteor KNX control mechanisms
1	0 675 71	For lighting control (ON/OFF, dimming, scenario...), shutters and slats controls and automation control Equipped with programmable LEDs (12 colours available) to indicate the status of the loads and provide system and alarm status feedback Mechanism to be equipped - 4 actuation points 2 modules To be equipped with key covers (p. 106) support frames and plates (p. 92-97) 4 actuation points With label holder To be equipped with support frames and plates (p. 92-97)
1	5 742 03	 ○ White - square version ● Magnesium - square version
1	5 744 04	
1	5 735 04	Supplied with glass plates Upon request, customization of plates possible with any other standard symbols (please contact us) ○ White ● Black
1	5 735 05	
1	5 735 12	Touch control mechanisms - 6 actuation points Supplied with glass plates Upon request, customization of plates possible with any other standard symbols (please contact us) ○ White ● Black
1	5 735 13	

Pack	Cat.Nos	Room Controller Units
1	0 484 18	Power modules equipped with output contacts for controlling: - different types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.) - a DALI dimming output for 64 ballasts max. Loads are managed by the controls to which they are linked: either by BUS/KNX controls, or by wired connection input terminals (switches, push-buttons, volt-free contacts). Multiphase connection and consumption measurement. 8 inputs - 10 outputs 8 DIN modules 17.5 mm
1	0 484 22	16 inputs - 16 outputs 12 DIN modules 17.5 mm
1	0 490 31	KNX thermostat For fan coil units: 2 tubes, 2 tubes + 2 wires and 4 tubes for heating and/or air conditioning For controlling on/off valves, 3 positions and 3 speeds (fan): comfort, economy and protection with manual or automatic selection. Adjustment accuracy + 0.5 °C 2 multi-function inputs for window contacts, summer/winter changeover, etc Backlit display Operating voltage 230 VA Supplied complete with dedicated flush-mounting box ○ White
1	0 674 64	Arteor temperature control 1,6" backlight display with 4 push-buttons and embedded a temperature probe Used to manage different types of heating/cooling system (FCU, heating/cooling valve, fan, electric load, ...) in combination through KNX with dedicated HVAC controller (for details see dedicated KNX brochure) - monitoring the ambient temperature with desired unit - adjustment of the temperature set-point and/or fan speed - selection of operating mode (comfort, protection) To be installed in flush-mounting boxes 2 modules To be equipped with support frames and plates (p. 92-97)

Hotel equipment

Arteor wiring devices




5 722 69



5 710 55



5 722 53



0 767 11



5 721 53



Support frame and plate selection charts **p. 92 - 97**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92 - 97)

Pack	Cat.Nos	MediaHub
1	5 722 69	Allows the user to:
1	5 727 69	- watch films from a PC or camcorder on TV: HDMI socket
		- watch the content of a USB stick on TV: 1 A USB Data socket
		- charge devices: USB socket (total power 3 A)
		- listen to music from a smartphone, tablet, etc on TV: Bluetooth function
		Inputs: 2 USB chargers including 1 USB Data, HDMI, Bluetooth audio
		Output: HDMI and USB Data
		Power supply with transformer provided
		2 modules
		○ White
		● Magnesium

Pack	Cat.Nos	Mechanical key card switches
1	5 722 30	For energizing a circuit by inserting a key fob
1	5 727 30	Cat.No 5 722 59 or a smart card (access card for a hotel room)
1	5 700 55	Example of use: hotel room power supply only when guest is present
1	5 710 55	Time-delay of approx. 30 sec. after card removal
		To be equipped with single pole latching relay
		Cat.Nos 5 722 27 or 5 727 27 (p. 70)
		2 modules
		Key card switches 230 V
		○ White
		● Magnesium
		● Champagne
		● Soft Alu

Pack	Cat.Nos	Key card switches RFID
1	5 722 53	For energizing a circuit for example meeting room, office, hotel room...
1	5 727 53	Works only with ISO type contactless key card Cat.Nos 0 767 11/12/13 or other ISO type 13.56 MHz key card
1	5 727 37	Time-delay of approx. 30 sec. after card removal
1	5 722 37	Low capacity contact 230 V - 30 VA
		Lighting of the slot by LED
		2 modules
		○ White
		● Magnesium
		● Champagne
		● Soft Alu

Pack	Cat.Nos	Key card switches
10	5 722 59	For mechanical key card switches
10	5 727 59	Enable use of key fob switches in hotels with key locks
		Supplied complete with a label holder for individual hotel identification
		○ White
		● Magnesium
10	0 767 11	For RFID key card switches
		MIFARE contactless badge card
		ISO format (50 x 80 mm)
		Chip: 13.56 MHz
		Standard 1 KB memory

Pack	Cat.Nos	Shaver sockets
1	5 721 55	Conform to BS EN 61558-2-5. IP 24
1	5 726 55	For use with European, British, American, Australian 2-pin plugs. Screwless live and neutral terminals
1	5 726 66	Double wound isolating transformer
1	5 726 65	Automatic self-resetting overload feature
1	5 721 53	Plug insertion operates micro-switch which energises transformer
1	5 726 53	To be equipped with BS 2 gang - 3-module plates (p. 92-93)
1	5 727 64	For flush-mounting boxes, use BS 2 gang box depth 48 mm, US type, Italian type boxes depth 48 mm or Cat.No 0 801 55
1	5 727 62	Power supply: 230 V - 50/60 Hz
		3 modules
		230 V / 120-230 V
		○ White
		● Magnesium
		● Champagne
		● Soft Alu
		○ White - with earth connector
		● Magnesium - with earth connector
		● Champagne - with earth connector
		● Soft Alu - with earth connector

Pack	Cat.Nos	Chimes
1	5 722 06	230 V - 50 Hz
1	5 722 46	Consumption: 65 mA
		1 melody
		Tone level: 73 dB at 1 m
		Compatible with push-button Cat.No 0 416 45
		○ White
		● Magnesium

Hotel equipment

Arteor wiring devices square version



5 737 22



5 720 57



5 737 78



5 725 54



5 737 81



Support frame and plate selection charts **p. 92-97**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92-97)

Pack	Cat.Nos	Lighting control
		Master switch - 2 modules
		2-way double pole 20 AX - 250 V± for general control: all ON / all OFF
10	5 732 84	○ White ● Magnesium ● Champagne ● Soft Alu
10	5 737 84	
10	5 737 89	
10	5 737 88	
		Master push-button - 2 modules
		2-way 6 A - 250 V± for general control: all ON/ all OFF
10	5 732 86	○ White ● Magnesium ● Champagne ● Soft Alu
10	5 737 86	
10	5 737 99	
10	5 737 98	
		Switch for bed lights - 2 x 1 module
		2 x 2-way switch - 10 AX - 250 V±
10	5 732 94	○ White ● Magnesium ● Champagne ● Soft Alu
5	5 737 94	
5	5 737 63	
5	5 737 62	
		Push-button for bed lights - 2 x 1 module
		2 x 2-way push-button - 6 A - 250 V±
10	5 732 96	○ White ● Magnesium
5	5 737 96	

		Electric roller blinds control - 250 VA
		Double switch 10 A - 2 modules
		For direct control of a motor (mechanism with fixed positions)
10	5 732 22	○ White ● Magnesium ● Champagne ● Soft Alu
10	5 737 22	
10	5 737 76	
10	5 737 75	
		Double push-button 10 A - 2 modules
		For control via automatic box (N/O mechanism)
10	5 732 24	○ White ● Magnesium
10	5 737 24	

		Curtain control - 250 VA
		Double switch 10 A - 2 modules
		For direct control of a motor (mechanism with fixed positions)
10	5 732 34	○ White ● Magnesium
10	5 737 34	
		Double push-button 10 A - 2 modules
		For control via automatic box (N/O mechanism)
10	5 732 36	○ White ● Magnesium
10	5 737 36	

Pack	Cat.Nos	Hotel bedroom call indicators
		Enable the resident to inform hotel staff of the room status Two settings are possible: - Do not disturb - Please clean the room 2 x 1 module
		Indicator for corridor
		Indicator lamp and bell push Installed in the corridor, display calls Supplied with LED
5	5 720 57	○ White ● Magnesium ● Champagne ● Soft Alu
5	5 725 57	
5	5 737 78	
5	5 737 77	
		Internal control unit
		Allows the user to select the desired setting Supplied with LED
5	5 720 54	○ White ● Magnesium ● Champagne ● Soft Alu
5	5 725 54	
5	5 737 82	
5	5 737 81	

Hotel equipment

Arteor wiring devices square version (continued)



5 722 24

5 727 57 + plate Magnesium 5 713 12



Support frame and plate selection charts **p. 92-97**

Mechanisms supplied with rocker plates, to be equipped with support frames (p. 88) and plates (p. 92-97)

Pack	Cat.Nos	Illuminated signs
		Mechanisms integrating LEDs and a pivoting window that can take customised labels (printed using a simple text editor on transparent printing paper) 2 modules
		Green or red LEDs Sign with 2-state LEDs with choice of green or red configurable on the mechanism. Power level: 1 W
5	5 722 24	 <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
5	5 727 24	
5	5 727 46	
5	5 727 45	
		Blue LEDs Sign with blue LEDs A choice of 2 power levels: 0.2 or 1 W
5	5 722 25	 <input type="radio"/> White <input checked="" type="radio"/> Magnesium <input type="radio"/> Champagne <input type="radio"/> Soft Alu
5	5 727 22	
5	5 727 48	
5	5 727 47	
		Buzzers
		230 V - 1 module
10	5 722 04	 <input type="radio"/> White <input checked="" type="radio"/> Magnesium
5	5 727 04	
		230 V - 2 modules
10	5 722 07	 <input type="radio"/> White <input checked="" type="radio"/> Magnesium
10	5 722 47	

Pack	Cat.Nos	Reading lights
		Fitted with maintenance-free LEDs LED colours: 3000 K (neutral white) 230 VA power supply - energy class A Screw terminals. For installation in the bedhead Offers directional lighting. Equipped with a flexible cable so the head can swivel Built-in dimmer. Consumption 3.3 W Luminous flux 110 lumen (equivalent to 15 W incandescent) Service life 40000 hours. For installation in box depth 40 mm min. 2 modules
1	5 722 57	 <input type="radio"/> White <input checked="" type="radio"/> Magnesium
1	5 727 57	



See p. 68 and 69 for
USB Type-C chargers
and Wireless chargers



Catalogue number index

Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack
0 030 00			0 675 95	116	1	5 700 51	78	10	5 710 81	72	1	5 720 78 ¹	68	5	5 721 82	60	5
			0 675 96	105	1	5 700 52	66	5	5 710 82	72	1	5 720 80	70	5	5 721 83	60	5
			0 675 96	116	1	5 700 53	63	1	5 710 83	73	1	5 720 81	70	5	5 721 84	60	10
3476	110	1	0 676 94	101	1	5 700 54	66	10	5 710 84	73	1	5 720 82	70	5	5 721 85	60	10
3477	110	1	0 676 95	102	1	5 700 55	121	1	5 710 85 ¹	77	10	5 720 87	70	5	5 721 86	61	5
3502	115	1	0 676 96	99	1	5 700 56	78	10	5 710 86 ¹	77	10	5 720 88	70	5	5 721 87	61	5
3506	115	1	0 676 97	100	1	5 700 57	80	10	5 710 92	75	1	5 720 89	84	1	5 721 88	61	10
3515	114	10	0 767 11	123	10	5 700 58	81	10	5 710 93	75	1	5 720 90	84	1	5 721 89	61	10
3523	113	1	0 775 80	69	1	5 700 59 ¹	80	10	5 714 00	89	5	5 720 91	85	1	5 721 90	61	10
3550	115	1	0 775 99	69	1	5 700 60	89	10	5 714 10	89	10	5 720 92	85	1	5 721 91	61	10
3559	114	1	0 776 00L	69	1	5 700 61	89	10	5 714 51	89	10	5 720 94	82	1	5 721 92	61	10
346020	114	1	0 818 56	90	1	5 700 70	71	5	5 714 52	89	10	5 720 96	84	1	5 721 93	61	10
348402	119	1	0 882 30	62	1	5 700 71	74	10	5 714 53	89	10	5 720 97	84	1	5 721 94	70	5
348402	121	1	0 882 35	62	1	5 700 72	74	10	5 716 08	89	5	5 721 00	76	10	5 721 95	70	5
0 026 00			3501/0	115	1	5 700 73	76	10	5 716 09	89	5	5 721 01	76	10	5 721 96	70	5
0 026 27	110	1	3501/1	115	1	5 700 74	76	10	5 716 10	89	5	5 721 03	76	10	5 721 97	70	5
0 026 33	110	1	3501/2	115	1	5 700 75	68	10	5 716 11	89	5	5 721 04	74	10	5 721 98	70	5
0 401 49	62	1	3501/3	115	1	5 700 76 ¹	68	1	5 716 12	89	5	5 721 05	74	10	5 721 99	70	5
0 484 08	119	1	3501/4	115	1	5 700 77	68	1	5 716 13	89	5	5 721 07	76	10	5 722 01	66	5
0 484 08	121	1	3501/5	115	1	5 700 78	68	1	5 716 14	89	5	5 721 08	77	10	5 722 02	66	5
0 484 12	119	1	3501/6	115	1	5 700 79	68	10	5 716 15	89	5	5 721 10	74	10	5 722 03	66	1
0 484 12	121	1	3501/7	115	1	5 700 80	72	1	5 718 20	76	10	5 721 11	74	10	5 722 04	125	10
0 484 18	122	1	3501/8	115	1	5 700 81	72	1	5 718 27	76	10	5 721 12	76	10	5 722 06	123	1
0 484 22	122	1	3501/9	115	1	5 700 82	72	1	5 718 70	76	10	5 721 13	77	10	5 722 07	125	10
0 487 70	121	1	3501/AMB	115	1	5 700 83	73	1	5 718 77	76	10	5 721 14	76	10	5 722 13	63	1
0 487 71	121	1	3501/AUX	115	1	5 700 84	73	1	5 720 00			5 721 16 ¹	74	10	5 722 15	66	5
0 487 72	120	1	3501/CEN	115	1	5 700 90	75	1	5 720 00	61	10	5 721 17	74	10	5 722 17	66	1
0 487 73	120	1	3501/GEN	115	1	5 700 91	75	1	5 720 01	61	10	5 721 18 ¹	74	10	5 722 18	66	1
0 487 74	120	1	3501/GR	115	1	5 710 00	61	10	5 720 02	61	10	5 721 19	74	10	5 722 19	66	10
0 487 75	121	1	3501/O/I	115	1	5 710 04	60	10	5 720 03	61	10	5 721 21	77	10	5 722 20	66	10
0 487 76	121	1	3501/OFF	115	1	5 710 05	60	10	5 720 04	60	10	5 721 22	75	10	5 722 21	65	1
0 487 77	120	1	3501/ON	115	1	5 710 08	60	5	5 720 05	60	10	5 721 23	74	10	5 722 23	65	10
0 487 78	121	1	3501/PUL	115	1	5 710 09	60	10	5 720 06	60	10	5 721 24 ¹	77	10	5 722 24	125	5
0 487 79	121	1	3501/SLA	115	1	5 710 10	60	10	5 720 07	60	10	5 721 27	72	1	5 722 25	125	5
0 487 88	121	1	3501/T	115	1	5 710 21 ¹	77	10	5 720 08	60	5	5 721 29	72	1	5 722 26	65	1
0 488 20	112	1	3501/TM	115	1	5 710 22	75	1	5 720 09	60	10	5 721 30	74	5	5 722 27	70	1
0 488 22	112	1	3501K	115	1	5 710 33	61	10	5 720 10	60	10	5 721 31	77	5	5 722 28	72	1
0 488 34	112	10	3501K/1	115	1	5 710 34	60	10	5 720 11	60	10	5 721 32	74	5	5 722 29	72	1
0 488 72	110	10	3508BUS	113	10	5 710 35	60	10	5 720 13	60	5	5 721 33	75	5	5 722 30	123	1
0 488 75	112	1	3508U2	113	10	5 710 36	76	10	5 720 14	61	5	5 721 34	74	5	5 722 34	65	1
0 489 71	112	1	3508U3	113	10	5 710 37	74	10	5 720 15	61	5	5 721 35	74	5	5 722 35	119	1
0 490 31	122	1	3522N	113	1	5 710 38	74	10	5 720 16	61	5	5 721 36	75	10	5 722 36	119	1
0 490 36	66	1	3544SW	119	1	5 710 39 ¹	74	10	5 720 20 ¹	77	10	5 721 37	73	1	5 722 37	123	1
0 490 37	66	1	3544SW	121	1	5 710 40	74	10	5 720 21 ¹	77	10	5 721 38	73	1	5 722 38	63	1
0 500 05	76	20	3546SW	119	1	5 710 41 ¹	74	10	5 720 22	75	1	5 721 39	73	1	5 722 39	63	1
0 502 99	77	10	3546SW	121	1	5 710 42	74	10	5 720 23	82	1	5 721 40	71	10	5 722 46	123	1
0 517 38	84	1	4 120 15	99	1	5 710 43 ¹	77	10	5 720 24	75	1	5 721 41	71	5	5 722 47	125	10
0 648 71	103	1	5 700 00			5 710 44	74	5	5 720 30	61	10	5 721 42	72	1	5 722 49	72	1
0 648 79	100	1	5 700 00	61	10	5 710 45	74	5	5 720 31	61	10	5 721 43	71	10	5 722 53	123	1
0 648 83	100	1	5 700 04	60	10	5 710 46	74	5	5 720 32	61	10	5 721 44	71	10	5 722 57	65	1
0 648 82	100	1	5 700 05	60	10	5 710 47	74	5	5 720 33	61	10	5 721 45	71	5	5 722 57	125	1
0 648 98	100	1	5 700 08	60	5	5 710 48	71	10	5 720 34	60	10	5 721 46	71	5	5 722 58	72	1
0 672 19	115	1	5 700 09	60	10	5 710 49	71	5	5 720 35	60	10	5 721 47	71	5	5 722 59	123	10
0 672 28	115	1	5 700 10	60	10	5 710 50	78	10	5 720 36	60	5	5 721 48	75	10	5 722 62	73	1
0 672 59	104	1	5 700 21 ¹	77	10	5 710 51	66	5	5 720 37	60	5	5 721 49	71	5	5 722 63	66	1
0 673 03	86	1	5 700 22	75	1	5 710 52	66	5	5 720 38	60	10	5 721 50	71	5	5 722 64	73	1
0 674 59	114	1	5 700 33	61	10	5 710 53	63	1	5 720 40	60	10	5 721 51	71	5	5 722 69	123	1
0 674 59	118	1	5 700 34	60	10	5 710 54	66	10	5 720 41	60	10	5 721 53	123	1	5 722 70	85	10
0 675 52	106	1	5 700 35	60	10	5 710 55	123	1	5 720 42	60	10	5 721 55	123	1	5 722 72	85	1
0 675 53	106	1	5 700 36	76	10	5 710 56	78	10	5 720 43	60	10	5 721 56	72	1	5 722 73	85	1
0 675 54	106	1	5 700 37	74	10	5 710 57	80	10	5 720 44	60	10	5 721 57	71	10	5 722 74	85	1
0 675 57	106	1	5 700 38	74	10	5 710 58	81	10	5 720 46	60	10	5 721 58	72	1	5 722 75	82	1
0 675 58	106	1	5 700 39 ¹	74	10	5 710 59 ¹	80	10	5 720 47	61	10	5 721 62	73	1	5 722 76	85	1
0 675 61	106	1	5 700 40	74	10	5 710 60	89	10	5 720 48	61	10	5 721 63	78	10	5 722 77	85	1
0 675 71	120	1	5 700 41 ¹	74	10	5 710 61	89	10	5 720 49	61	10	5 721 65	60	10	5 722 78	85	1
0 675 89	117	5	5 700 42	74	10	5 710 70	71	5	5 720 51	62	1	5 721 66	60	10	5 722 79	84	1
0 675 89	119	5	5 700 43 ¹	77	10	5 710 71	74	10	5 720 54	124	5	5 721 67	78	10	5 722 80 ¹	85	10
0 675 90	117	1	5 700 44	74	5	5 710 72	74	10	5 720 55	70	1	5 721 69 ¹	78	10	5 722 82 ¹	84	1
0 675 91	117	1	5 700 45	74	5	5 710 73	76	10	5 720 56	61	5	5 721 71	78	10	5 722 83	85	1
0 675 92	105	1	5 700 46	74	5	5 710 74	76	10	5 720 57	124	5	5 721 72 ¹	78	10	5 722 84	85	1
0 675 92	116	1	5 700 47	74	5	5 710 75	68	10	5 720 66	75	1	5 721 74	60	10	5 722 88	84	1
0 675 93	117	1	5 700 48	71	10	5 710 76 ¹	68	1	5 720 70	75	1	5 721 75	60	10	5 722 99	84	1
0 675 95	105	1	5 700 49	71	5	5 710 77	68	1	5 720 71								

Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack
5 723 04	81	10	5 724 63 ¹	74	10	5 726 00			5 726 97	85	10	5 728 32	81	10	5 729 46	70	1
5 723 06	80	10	5 724 65	75	5				5 726 98 ¹	85	10	5 728 33	81	10	5 729 47	70	1
5 723 07	89	10	5 724 66 ¹	77	10	5 726 00			5 726 99 ¹	85	10	5 728 35	81	10	5 730 34	61	10
5 723 10 ¹	78	10	5 724 67	74	5				5 727 01	66	5	5 728 36	81	10	5 730 35	61	10
5 723 12 ¹	78	10	5 724 75	85	1	5 726 00	76	10	5 727 02	66	5	5 728 37	82	10	5 730 36	61	5
5 723 13 ¹	78	10	5 724 79	85	1	5 726 01	76	10	5 727 03	66	1	5 728 38	82	10	5 730 37	61	5
5 723 14 ¹	80	10	5 724 84	68	10	5 726 02	76	10	5 727 04	125	5	5 728 39	80	1	5 730 38	61	5
5 723 15 ¹	81	10	5 724 85	70	5	5 726 03	76	10	5 727 05	66	1	5 728 41	89	10	5 730 39	61	5
5 723 16 ¹	80	10	5 724 90	85	1	5 726 04	74	10	5 727 06	66	1	5 728 42	89	10	5 730 40	61	5
5 723 17	80	10	5 724 91	85	1	5 726 05	74	10	5 727 07	66	1	5 728 43	89	5	5 730 41	61	5
5 723 19	89	10	5 724 92	70	5	5 726 07	76	10	5 727 08	66	1	5 728 45	80	10	5 730 42	61	5
5 723 20	89	10	5 724 94	85	1	5 726 08	77	10	5 727 13	63	1	5 728 46	80	10	5 730 43	61	5
5 723 21	89	5	5 724 95	85	1	5 726 10	74	10	5 727 15	66	5	5 728 47	80	10	5 730 44	61	5
5 723 22	80	10	5 724 96	85	1	5 726 11	74	10	5 727 17	66	1	5 728 48	80	10	5 730 45	61	5
5 723 23	80	10	5 724 97	85	1	5 726 12	76	10	5 727 18	66	1	5 728 49	80	10	5 730 46	61	10
5 723 30	81	10	5 724 98	85	1	5 726 13	77	10	5 727 19	66	10	5 728 50	80	5	5 730 47	61	10
5 723 31	81	10	5 724 99	85	1	5 726 14	76	10	5 727 20	66	10	5 728 51	80	10	5 730 48	61	5
5 723 32	81	10	5 725 00	61	10	5 726 15	76	10	5 727 21	71	10	5 728 52	80	10	5 730 49	61	5
5 723 33	81	10	5 725 01	61	5	5 726 16 ¹	74	10	5 727 22	125	5	5 728 53	80	5	5 732 22	124	10
5 723 35	81	10	5 725 02	61	10	5 726 17	74	10	5 727 24	125	5	5 728 54	80	10	5 732 24	124	10
5 723 36	81	10	5 725 03	61	5	5 726 18 ¹	74	10	5 727 26	65	1	5 728 55	80	10	5 732 34	124	10
5 723 37	82	10	5 725 04	60	10	5 726 19	74	10	5 727 27	70	1	5 728 57	80	5	5 732 36	124	10
5 723 38	82	10	5 725 05	60	10	5 726 21	77	10	5 727 28	123	1	5 728 58	80	10	5 732 84	124	10
5 723 39	80	1	5 725 06	60	10	5 726 22	75	10	5 727 30	65	1	5 728 59	80	10	5 732 86	124	10
5 723 41	89	10	5 725 08	60	5	5 726 23	74	10	5 727 34	119	1	5 728 60	80	10	5 732 94	124	10
5 723 42	89	10	5 725 09	60	10	5 726 24 ¹	77	10	5 727 35	119	1	5 728 61	80	10	5 732 96	124	10
5 723 43	89	5	5 725 10	60	10	5 726 27	72	1	5 727 36	119	1	5 728 62	80	5	5 733 94	68	10
5 723 45	84	1	5 725 11	60	5	5 726 29	72	1	5 727 37	123	1	5 728 63	80	5	5 734 55	62	1
5 723 46	84	1	5 725 13	60	5	5 726 30	74	5	5 727 38	63	1	5 728 64	80	10	5 734 70	76	20
5 723 49	80	10	5 725 14	61	5	5 726 31	77	5	5 727 39	63	1	5 728 65	80	10	5 734 71	76	10
5 723 50	80	5	5 725 15	61	5	5 726 32	74	5	5 727 45	125	5	5 728 66	80	10	5 735 01	63	1
5 723 51	80	10	5 725 16	61	5	5 726 33	75	5	5 727 46	125	5	5 728 67	80	10	5 735 04	122	1
5 723 52	80	10	5 725 17	84	1	5 726 34	74	5	5 727 47	125	5	5 728 68	80	10	5 735 05	122	1
5 723 53	80	5	5 725 18	84	1	5 726 35	74	5	5 727 48	125	5	5 728 69	80	10	5 735 12	122	1
5 723 54	80	10	5 725 20 ¹	77	10	5 726 36	75	10	5 727 53	123	1	5 728 71	80	5	5 735 13	122	1
5 723 55	80	10	5 725 21 ¹	77	10	5 726 37	73	1	5 727 54	66	5	5 728 72	80	5	5 736 70	76	20
5 723 57	80	5	5 725 22	75	1	5 726 38	73	1	5 727 55	66	5	5 728 73	80	10	5 736 71	76	10
5 723 58	80	10	5 725 23	61	10	5 726 39	73	1	5 727 57	65	1	5 728 74	80	10	5 737 01	63	1
5 723 59	80	10	5 725 24	61	10	5 726 40	71	10	5 727 58	125	1	5 728 75	80	10	5 737 22	124	10
5 723 60	67	1	5 725 25	61	5	5 726 41	74	10	5 727 59	71	10	5 728 76	80	10	5 737 24	124	10
5 723 61	67	1	5 725 26	61	5	5 726 42	72	1	5 727 60	123	10	5 728 77	80	10	5 737 34	124	10
5 723 62	70	1	5 725 27	61	10	5 726 43	71	10	5 727 61	123	1	5 728 78	80	5	5 737 36	124	10
5 723 63	70	1	5 725 28	60	10	5 726 44	71	10	5 727 62	66	1	5 728 79	80	1	5 737 62	124	5
5 723 66	77	10	5 725 29	60	5	5 726 45	71	5	5 727 63	123	1	5 728 80	80	1	5 737 63	124	5
5 723 67	77	10	5 725 30	60	5	5 726 46	71	5	5 727 64	123	1	5 728 81	80	1	5 737 64	124	5
5 723 68	77	5	5 725 31	60	10	5 726 47	71	5	5 727 65	85	10	5 728 82	80	10	5 737 65	124	10
5 723 69	77	5	5 725 32	60	10	5 726 48	75	10	5 727 66	85	1	5 728 83	80	10	5 737 66	124	10
5 723 80	60	10	5 725 33	60	10	5 726 49	71	5	5 727 67	85	1	5 728 84	80	10	5 737 67	124	10
5 723 81	60	10	5 725 34	60	10	5 726 50	71	5	5 727 68	85	1	5 728 85	80	10	5 737 68	124	10
5 723 82	60	5	5 725 35	60	10	5 726 51	71	5	5 727 69	85	1	5 728 86	80	10	5 737 69	124	10
5 723 83	60	5	5 725 36	60	10	5 726 52	123	1	5 727 70	85	1	5 728 87	80	10	5 737 70	124	10
5 723 84	60	5	5 725 37	60	10	5 726 53	123	1	5 727 71	85	1	5 728 88	80	10	5 737 71	124	10
5 723 85	60	5	5 725 38	60	10	5 726 54	72	1	5 727 72	85	1	5 728 89	80	10	5 737 72	124	10
5 723 86	60	10	5 725 39	61	10	5 726 55	72	1	5 727 73	85	1	5 728 90	80	10	5 737 73	124	10
5 723 87	60	10	5 725 40	61	10	5 726 56	71	10	5 727 74	85	1	5 728 91	80	10	5 737 74	124	10
5 723 88	60	10	5 725 41	61	10	5 726 57	71	10	5 727 75	85	1	5 728 92 ¹	80	10	5 737 75	124	10
5 723 89	60	10	5 725 42	60	10	5 726 58	72	1	5 727 76	85	1	5 728 93 ¹	80	10	5 737 76	124	10
5 723 90	90	10	5 725 43	60	10	5 726 59	73	1	5 727 77	85	1	5 728 94	80	10	5 737 77	124	10
5 723 92	90	25	5 725 44	60	10	5 726 60	73	1	5 727 78	85	1	5 728 95	80	10	5 737 78	124	10
5 723 96	90	2	5 725 45	60	10	5 726 61	78	10	5 727 79	84	1	5 728 96	80	10	5 737 79	124	10
5 724 25	75	10	5 725 46	60	10	5 726 62	78	10	5 727 80 ¹	85	10	5 728 97	80	10	5 737 80	124	10
5 724 26	75	10	5 725 47	61	10	5 726 63	78	10	5 727 81	85	10	5 728 98 ¹	81	10	5 737 81	124	10
5 724 27	75	5	5 725 48	61	10	5 726 64	78	10	5 727 82 ¹	84	1	5 728 99 ¹	81	10	5 737 82	124	10
5 724 28	75	5	5 725 49	61	10	5 726 65	78	10	5 727 83	85	1	5 729 00			5 737 83	124	10
5 724 41	74	5	5 725 50	61	10	5 726 66	78	10	5 727 84	85	1				5 737 84	124	10
5 724 42	74	5	5 725 51	61	10	5 726 67	78	10	5 727 85	85	1	5 729 07	81	10	5 737 85	124	10
5 724 44	71	10	5 725 52	61	10	5 726 68	78	10	5 727 86	66	1	5 729 08	81	10	5 737 86	124	10
5 724 45	71	10	5 725 53	61	10	5 726 69 ¹	78	10	5 727 87	66	1	5 729 09	81	10	5 737 87	124	10
5 724 46	71	5	5 725 54	61	10	5 726 70	78	10	5 727 88	84	1	5 729 10	81	10	5 737 88	124	10
5 724 47	71	5	5 725 55	61	10	5 726 71	78	10	5 727 89	66	1	5 729 11	81	10	5 737 89	124	10
5 724 48	71	5	5 725 56	61	10	5 726 72 ¹	78	10	5 727 90	66	1	5 729 12	81	10	5 737 90	124	10
5 724 49	71	5	5 725 57	61	10	5 726 73	71	5	5 727 91	66	5	5 729 13	81	10	5 737 91	124	10
5 72																	

Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack	Cat.Nos	Page N°	Pack
5 740 59	62	1	5 743 43	99	1	BT3487AP	104	1									
5 740 80	65	1	5 743 48	119	5	BT3488W	104	1									
5 740 82	65	1	5 743 49	119	5	BTMH-SERVERKIT	104	1									
5 740 83	65	1	5 743 96	119	2	BTMH-HOMESERVER1	104	1									
5 740 84	70	1	5 743 97	119	2	E46ADCN	114	1									
5 740 89	118	1	5 744 04	122	1	E46ADCNV127	114	1									
5 740 96	112	1	5 745 03	107	1	E49	114	1									
5 740 97	62	1	5 745 04	107	1	F401	110	1									
5 740 98	112	1	5 745 89	118	1	F411/1/NC	110	1									
5 741 31	86	1	5 748 33	76	20	F411/4	110	1									
5 741 32	86	1	5 748 34	76	10	F411U2	110	1									
5 741 33	86	1	5 751 10	73	5	F413N	110	1									
5 741 34	86	1	5 751 11	72	5	F418U2	110	1									
5 741 37	70	1	5 751 12	72	1	F422	114	1									
5 741 38	70	1	5 751 13	72	5	F425	114	1									
5 741 40	62	1	5 751 14	72	1	F428	110	1									
5 741 41	62	1	5 751 16	73	1	F430/2	114	1									
5 742 00	99	1	5 751 17	72	5	F430/4	114	1									
5 742 01	98	1	5 751 18	72	1	F430R3V10	114	1									
5 742 02	98	1	5 751 30	89	5	F430R8	114	1									
5 742 03	122	1	5 751 32	89	5	F430V10	114	1									
5 742 04	100	1	5 751 33	72	5	F450	104	1									
5 742 05	101	1	5 751 34	72	5	F454	115	1									
5 742 06	102	1	5 751 35	72	5	F455	115	1									
5 742 07	103	1	5 751 36	72	5	F458	119	1									
5 742 08	102	1	5 751 37	72	5	F458	121	1									
5 742 09	98	1	5 751 40	89	5	F459	104	1									
5 742 11	98	1	5 751 42	89	5	F459	119	1									
5 742 12	98	1	5 751 43	73	5	F459	121	1									
5 742 13	100	1	5 751 44	73	5	F461U1	110	1									
5 742 14	101	1	5 751 45	73	5	F520	113	1									
5 742 15	102	1	5 751 46	73	5	F521	113	1									
5 742 16	103	1	5 751 47	73	5	F522	113	1									
5 742 17	102	1	5 751 51	72	5	F523	113	1									
5 742 18	98	1	5 751 52	72	5	L4669	114	1									
5 742 19	99	1	5 751 53	72	5	L4669/500	114	1									
5 742 20	98	1	5 751 54	72	5	L4669KM1	114	1									
5 742 21	98	1	5 751 55	72	5	MH201	119	1									
5 742 22	100	1	5 751 70	73	5	MH201	121	1									
5 742 23	101	1	5 751 71	73	5	MH202	115	1									
5 742 24	102	1	5 751 72	73	5	MHVISUAL	115	1									
5 742 25	103	1	5 751 73	73	5	NETTRAIN	102	1									
5 742 26	102	1	5 751 74	73	5	NETATMO1	102	1									
5 742 27	98	1	5 751 75	73	5	NETATMO2	102	1									
5 742 28	99	1	5 751 76	73	1	NETATMO3	102	1									
5 742 29	98	1	5 751 88	72	5	NETATMO4	102	1									
5 742 30	98	1	5 751 89	72	5												
5 742 31	100	1	5 751 90	90	5												
5 742 32	101	1	5 751 93	72	5												
5 742 33	102	1	5 751 94	72	5												
5 742 34	103	1	5 751 95	72	5												
5 742 35	102	1	5 753 60	89	5												
5 742 36	98	1	5 753 62	89	5												
5 742 37	99	1	5 753 64	89	5												
5 742 43	99	1	5 754 10	89	10												
5 742 44	101	1	5 754 12	89	10												
5 742 45	101	1	5 754 50	90	10												
5 742 46	101	1	5 754 60	90	5												
5 742 47	101	1	5 754 70	90	10												
5 742 52	101	1	5 754 80	90	5												
5 742 70	102	1	5 760 00	88	10												
5 742 73	102	1	5 760 01	88	5												
5 742 74	103	1	5 760 02	88	10												
5 742 75	101	1	5 760 03	88	10												
5 742 76	101	1	5 760 13	90	10												
5 742 79	102	1	5 760 15	90	10												
5 742 90	102	1	5 760 16	90	10												
5 742 91	101	1	5 760 30	88	10												
5 742 95	103	1	5 760 31	88	5												
5 742 97	102	1	5 760 32	88	5												
5 742 98	102	1	5 760 40	88	10												
5 742 99	103	1	5 760 40	88	10												
5 743 12	102	1	6 890 00														
5 743 13	102	1															
5 743 14	102	1															
5 743 15	102	1															
5 743 26	101	1	6 890 28	90	1												
5 743 27	102	1	6 890 36	90	1												
5 743 28	102	1	6 890 38	90	1												
5 743 29	103	1	BMDI1002	110	1												
5 743 40	99	1	BMSW1003	110	1												
5 743 41	99	1	BMSW1005	110	1												
5 743 42	99	1	BT3454	114	1												
			BT3487	104	1												

Red catalogue number: new products

FOLLOW US ON



www.facebook.com/legrand.za



[@legrandsa](https://twitter.com/legrandsa)



<https://www.linkedin.com/company/legrand-south-africa>



<https://za.pinterest.com/legrandsa>



[@legrand_south_africa](https://www.instagram.com/legrand_south_africa)



Legrand S.A

21 Spartan Crescent,
Eastgate, Ext 3
Sandton, 2054

Tel: +27 11 444 7971

Fax: +27 11 444 7980

Email: legrand.south.africa@legrand.co.za

www.legrand.co.za