



H E L L O H O M E

PUT THE MAGIC OF IOT IN YOUR PROJECTS

ARTEOR™ with NETATMO



THE GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES












WORLD IN PROGRESS

ARTEOR™ IS PART OF IT

Digitalisation and networks are changing everything: how we live, communicate, work and shape our environment. Homes, offices, hotels and public buildings are becoming smarter all the time and ever more amenable to what their occupants want.


Arteor exploits these new opportunities and is also easy to install, configure and use. With its new functions, innovative operating concepts and updated design, Arteor provides universal solutions to the problems encountered by dealers, retailers, installers, systems integrators and planning specialists all over the world – as well as the expectations of their clients.


CONTENTS

2-3 GENERAL FEATURES		WORLD IN PROGRESS	02
4-9 NEW FINISHES		NEW NEUTRAL FINISHES A WIDER CHOICE OF METALS ARTEOR™ ON TREND	04 06 08
10-13 ARTEOR™ WITH NETATMO		THE SMART, RADIO SOLUTION FOR THE CONNECTED HOME. SIMPLE - OPEN - ADAPTABLE	10
14-17 ARTEOR™ WITH NETATMO		GROWING WITH USERS' NEEDS	14
18-21 ARTEOR™ WITH NETATMO		EVEN THE VERY FIRST STEP IS SMART	18
22-23 ARTEOR™ WITH NETATMO		EASY INSTALLATION	22
24-27 ARTEOR™ WITH NETATMO		THE HOME + CONTROL APP FOR A SMART PHONE OR TABLET	24
28-33 CATALOGUE PAGES		CONNECTED HOME SUPPORT FRAMES AND COVER PLATES	28 32
34 ARTEOR™ WITH NETATMO		HOW DO I BECOME AN ACCREDITED NETATMO INSTALLER?	34


TIMELESS HARMONY

NEW NEUTRAL FINISHES

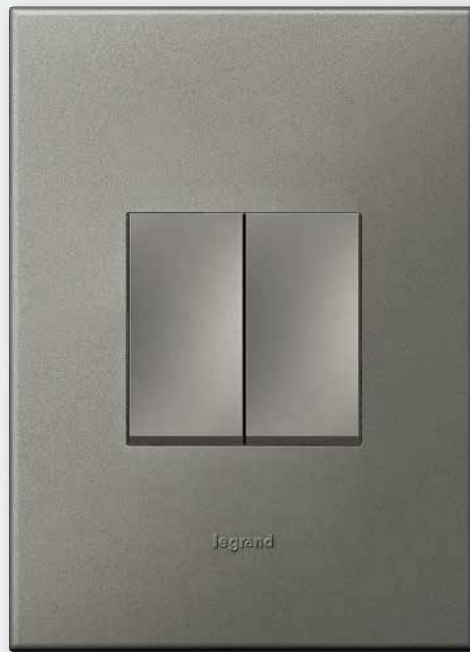

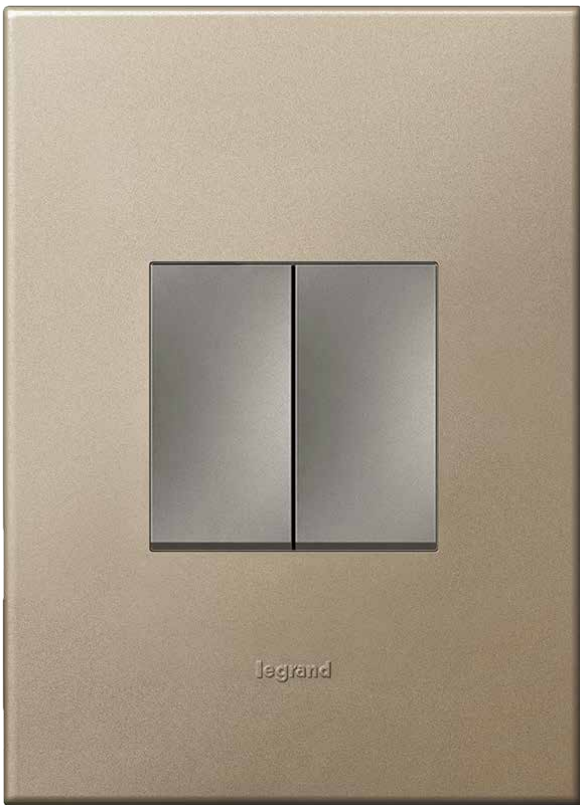

CHAMPAGNE

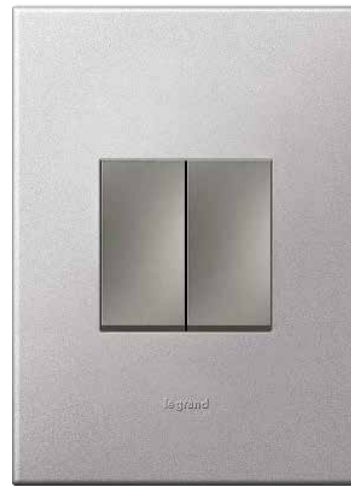

SOFT ALU



WHITE

NEUTRAL FULL COLOUR

This neutral and minimalist collection leaves plenty of room for contemporary design concepts. An extended colour range with new plate and mechanism colours gives designers even greater freedom.



MAGNESIUM

NEW COMBINATIONS

Arteor meets customisation requirements by offering more ways to combine colours. But the more technology shapes our lives, the more we want it to blend in discreetly with our individual environments. This is why clean lines and a pared-down look define the design philosophy of the range.



DARK BRONZE



GRAPHITE

STRONG IMPACT

A WIDER CHOICE OF METALS



REFLECTIVE METAL

A new collection made of metal finishes provides a suitably brilliant solution for more demanding projects. Elegantly discreet despite their mirror finish, these switches blend seamlessly into their environment. Available in gold and other colours, they give a definite nod to the technology involved.

Opposite Page - Reflective Metal Black



STAINLESS STEEL



GOLD

BRUSHED METAL

Two further colours have been added to this relatively neutral but prestigious collection of brushed metal finishes. "Pink Champagne" (a warm, reddish brown) and "Black" offer designers a wider choice for high-end applications.



PINK CHAMPAGNE



STAINLESS STEEL



BLACK



GOLD BRASS



OUT OF THE BOX

ARTEOR™ ON TREND



CUBE

In the Wood collection, nature and technology combine to create an original, appealing finish. The unique texture of Signature Cube turns this extraordinary finish into a sophisticated modern design element and creates a unique combination of look and feel.



GREY OAK

Both collections create an impression of discretion and technical sophistication. Chromed metal accents reinforce the image of a prestigious product. A bevelled profile ensures an on-trend slimline look.



CONNECTED LIVING

MAKE YOUR HOME TRULY YOURS

ARTEOR™ with NETATMO

Increasing digitalisation and networking are making our lives ever simpler and more convenient, as technology transforms the way we work, communicate, travel and live at home. But greater possibilities also bring greater complexity. This is why Legrand, in developing Arteor with Netatmo, has sought to make networked digital technology as easy as possible, for designers, installers and users of living space.

The result is the radio solution “Arteor with Netatmo” which has been developed in collaboration with French industry-leading smart home brand Netatmo. Enhancing individual comfort and security in the connected home, it is really quick and easy to install and it will flexibly and economically adapt to changing habits, aspirations and needs over time.






Arteor with Netatmo is part of Legrand's ELIOT program. This program is dedicated to developing sustainable connected solutions that are easy to use and maintain, accessible for everybody and customisable to the users' needs, desires and habits. To enhance the value of any home and make everyday life just that little bit more comfortable and secure.

ARTEOR™ WITH NETATMO

ADD A TOUCH OF SMARTNESS

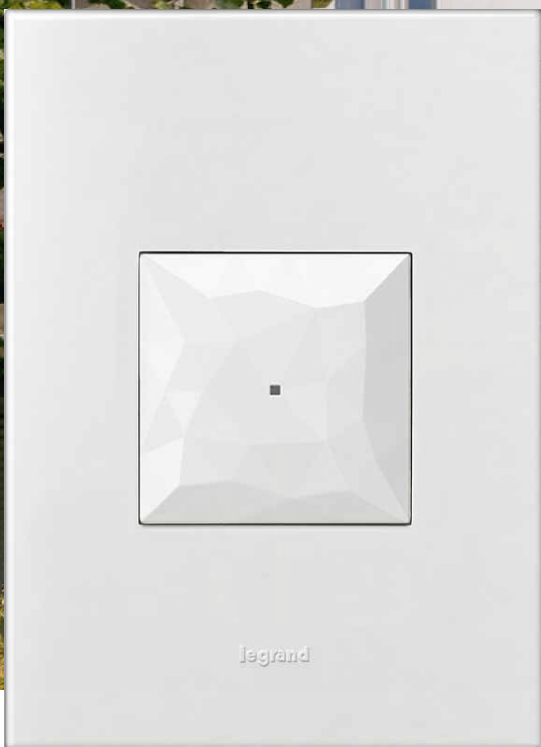

ARTEOR™ with NETATMO

THE SMART RADIO SOLUTION

Arteor with Netatmo is a radio based solution for the connected home. The intelligent products communicate with one another via radio ZigBee (2.4 GHz waveband). This means there is no need for specific or extensive cabling. Also, although the range only contains a few products, these can be used to create lots of individual solutions for a more customised feel at home.

SIMPLE, ADAPTABLE, OPEN

Arteor with Netatmo has been designed and developed as a simple solution to make every house more individual, convenient and secure. Simple for planners, who are able to integrate many useful functions without having to provide for complicated cabling. Simple for installers, who are able to install the system without a great deal of effort or specialist knowledge. Simple for users, who will find it convenient to operate, easy to extend and are able to make changes at any time.




APP CONTROL FOR EASE OF USE

All functions in an Arteor with Netatmo installation can also comfortably be controlled on your smartphone or tablet: switching individual lights on or off, controlling roller blinds, curtains and electrical appliances or triggering more complex scenarios - using the app, you have everything under control. And you stay connected with your home, no matter where you are.

VOICE CONTROL

Using voice commands, the installation can be managed without lifting a finger.

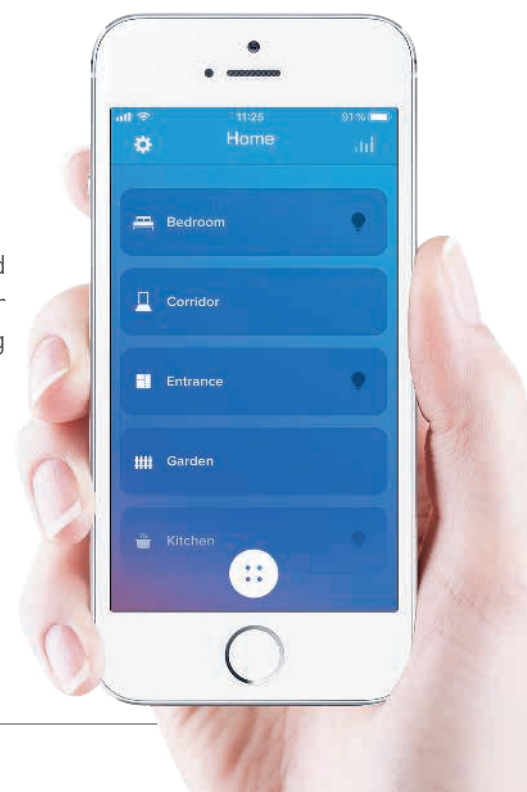

GROWING WITH USERS' NEEDS

ADAPTIVE TO SUIT OUR EVER-CHANGING LIFESTYLE

Its simple installation makes Arteor with Netatmo a really smart choice. No complex BUS system or cabling is needed to adapt the solution smoothly to changing circumstances. Putting a switch within reach of children, rearranging the living room, converting a kid's bedroom into an office, adding more functions...
- Arteor with Netatmo will change as readily and as quickly as you do!




PUT THEM ANYWHERE

Using wireless switches you can ensure your controls are always exactly where you want them, for example lower on the wall to be within easy reach of the children. They can be repositioned as your children grow or when you decide to rearrange your furniture.



ALERTS

If there's a power failure when you're not at home, the app will warn you instantly so you can take action.

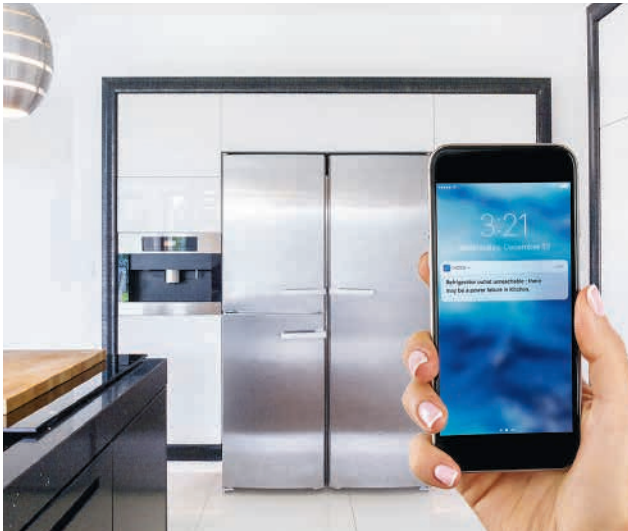

ENERGY MANAGEMENT

Whether to check your real-time energy consumption or to do a more long-term, in-depth analysis, the app will help you all the way towards greater energy efficiency.



“LEAVING HOME” SCENARIO

A single press will turn off the lights and close all the shutters as you leave the home, meaning you save time and gain convenience.



“WAKE UP” SCENARIO

Have soft light come on and the shutters open for a great start to the day, every day!




FEW COMPONENTS – LOTS OF OPTIONS

The system consists of only a few simple components. The 'Gateway Kit' that needs to be installed to start, connected controls which trigger actions, such as controlling lights, roller blinds and electrical appliances and wireless, battery powered controls. They manage scenarios, create centralised functions and allow remote control of individual functions.

CONNECTED WIRED PRODUCTS

The wired products are installed in the same way as conventional components and then paired with the wireless switches (which can be positioned anywhere) via the ZigBee 2.4 Ghz waveband. Thanks to the dynamic mesh network, all functions can easily be reconfigured at any time. It is also easy to add extra modules.


Wired devices (230 V AC)

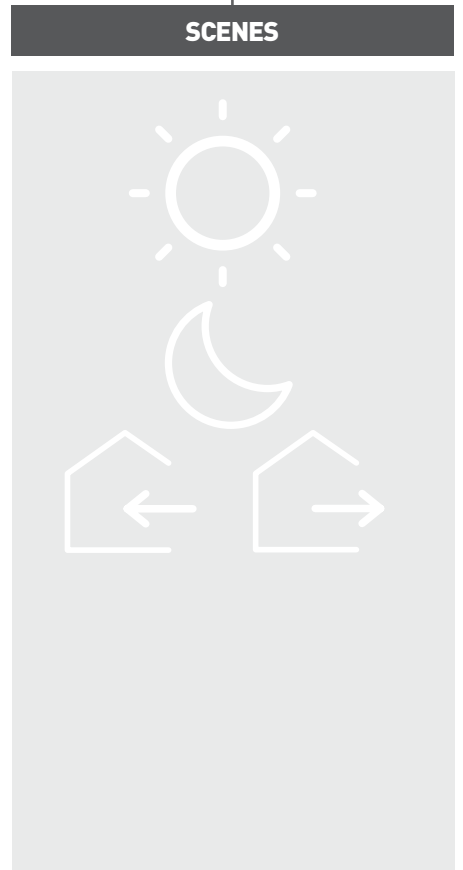

WIRELESS CONTROLS

Wireless light and roller blind switches are used to extend the installation and enable individual, group-based or centralized remote control of lighting and roller blinds. They are adaptable to take into account evolutions of the installation over time.

Wireless devices (battery powered)

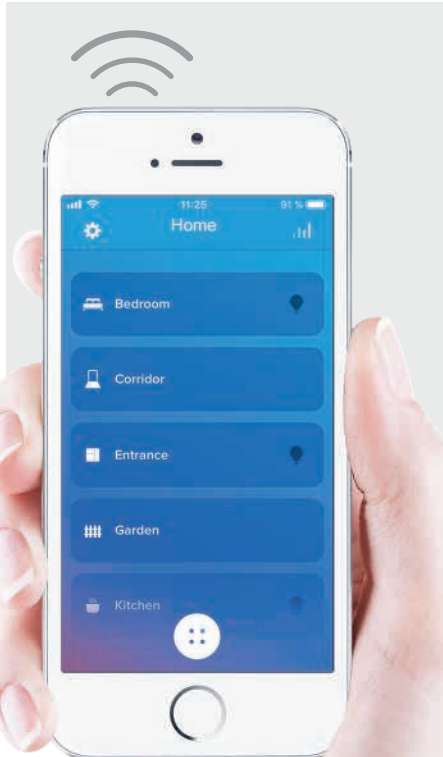

FUNCTIONS

LIGHT





Connected light switch with dimmer option, 2 modules
Connected light switches, 2x1 module,
Micromodule switch




Wireless 1-gang and 2-gang light switches

CURTAINS/ ROLLER BLINDS



Connected curtain / roller blind switches
2 x 1 module



Curtain/roller blind wireless switch

ENERGY



Connected mobile socket outlet,
Energy module for rail mounting
Connected socket outlet module

The Home + Control App, which can be used to control the system via smartphone and tablet, is available for devices with Android and iOS. Download it for free from your usual app stores.






HOME + CONTROL App



EVEN THE VERY FIRST STEP IS SMART

ARTEOR™ WITH NETATMO AT A GLANCE

Many useful functions can be implemented at home using just a few different devices. To start the connected installation with Arteor with Netatmo, the Gateway kit consisting of the gateway and master switch is essential.

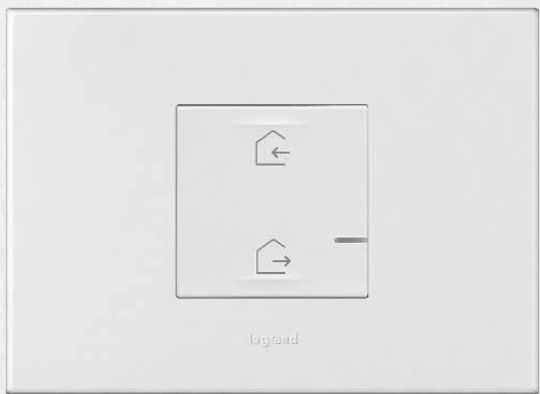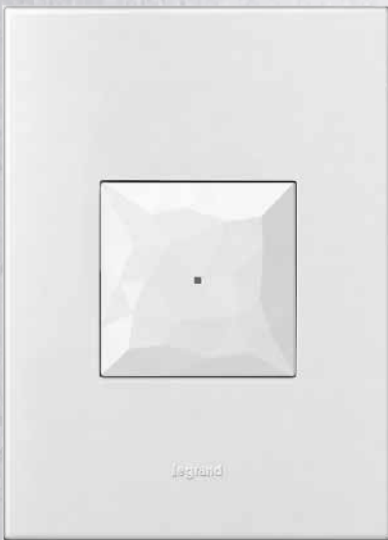


GATEWAY


Connects the Arteor with Netatmo system to the home Wi-Fi network. The Gateway is necessary in order to use the Home + Control App and thereby enables convenient control of the installation via smartphone, tablet or via voice control.

WIRELESS MASTER SWITCH

Used to create the ZigBee radio network (2.4 GHz waveband) via which all components within the system communicate with each other. No need for complicated cabling. The Home / Away wireless master switch also allows to launch the preset life scenes "Leave Home" and "Back Home".

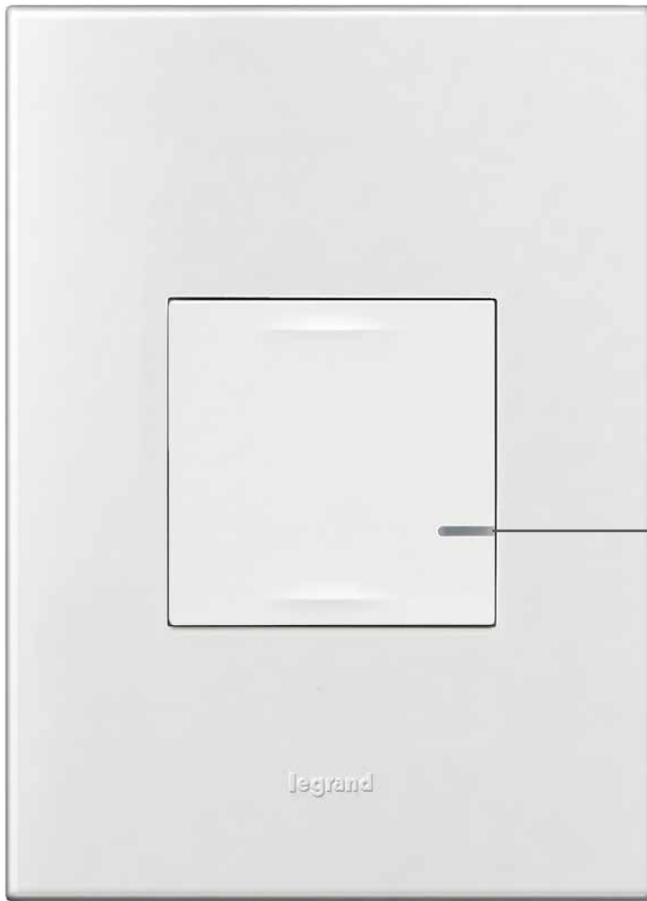


Few components are required to enable control of lighting and shutters, more complex scenarios and electrical appliances via switched outlets. The system's modular structure allows for easy adaptation to changing needs and enables extensions any time they are required.

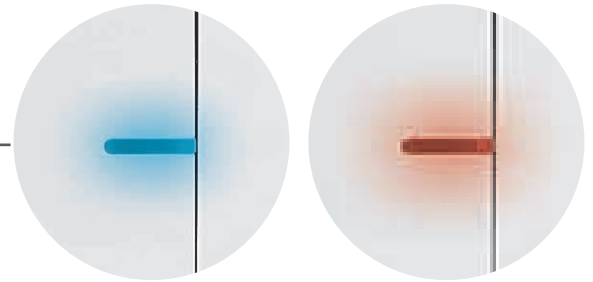

The LED in the switch serves as a locator while also signalling the product's status. During pairing, its changing colours guide you through the process.

THE CONNECTED SWITCH - 4 IN 1

This compact, smart and versatile product combines 4 functions in one: both a switch and a dimmer, it also has indicator and locator features. All this in a device just 34 mm deep, fitting any standard mounting box.

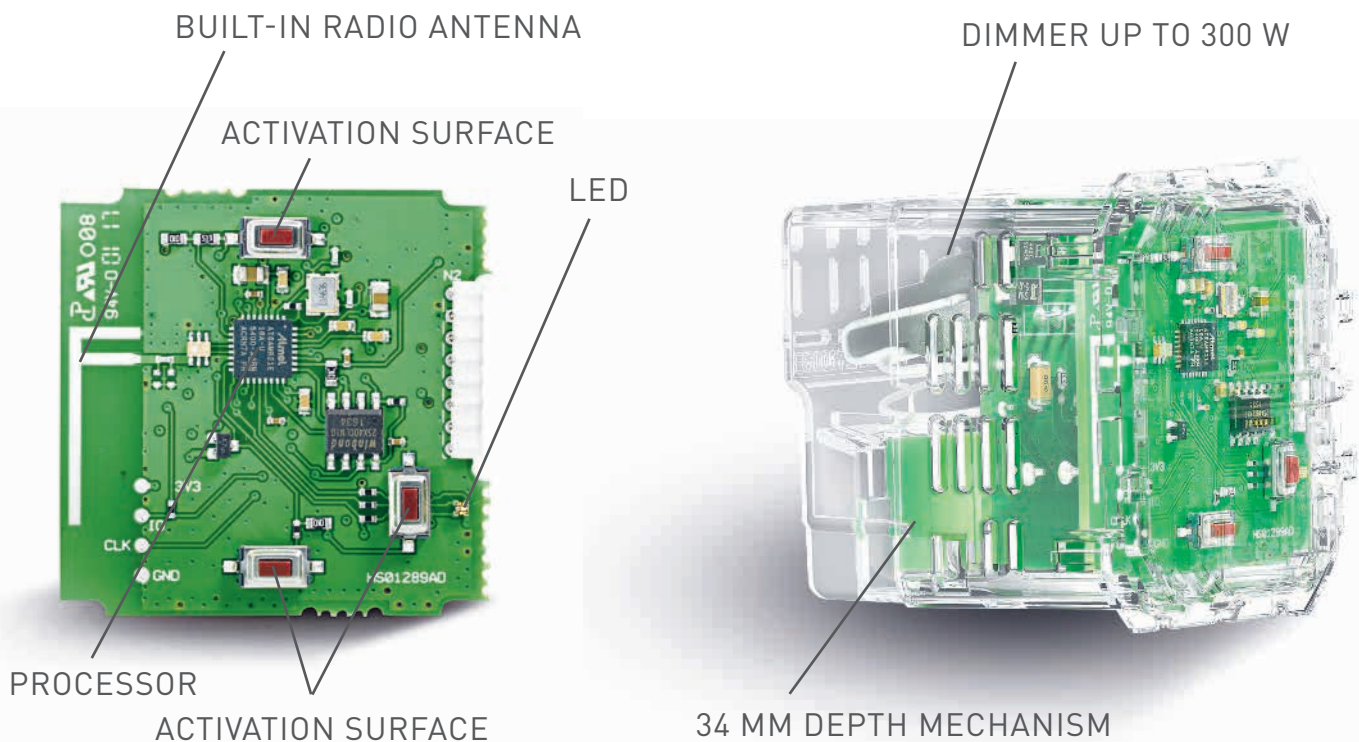

AS INDIVIDUAL AS YOU ARE

FUNCTIONALITY MEETS DESIGN

Arteor with Netatmo doesn't only offer individual responses to all user requirements in terms of functionality. It also adds a touch of style to the overall look and feel of the house. Arteor finishes blend in perfectly to any kind of living environment.



SCENARIOS

Increase comfort through pre-programmed life scenes, such as Wake up / Sleep or Home / Away.



ROLLER BLINDS/ CURTAINS

For convenient individual or central control of roller blinds. Locally or remotely.



CONNECTED SOCKET OUTLETS

Allow to remotely control electrical appliances, measure instantaneous consumption, monitor daily or monthly consumption and to be alerted with smart notifications.



LIGHT

Convenient control of lights with connected wired and wireless switches, with or without dimmer option.




E A S Y INSTALLATION

WHETHER NEW OR RENOVATION


5 STEPS TO A CONNECTED HOME

1

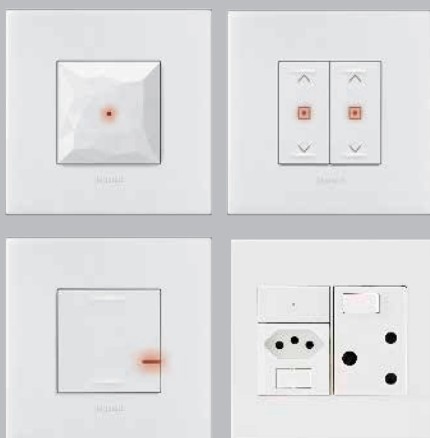


After installing all wired devices, switch on power and all LEDs will light up in red.

2


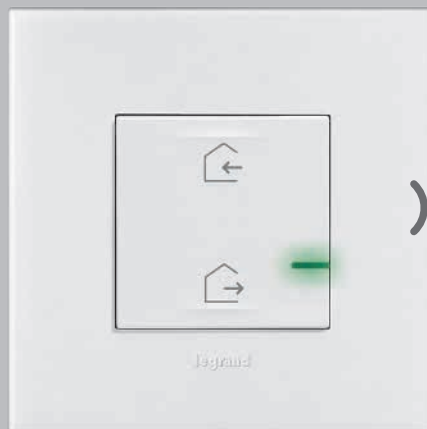


Press the master switch at its centre for 5 seconds.



3

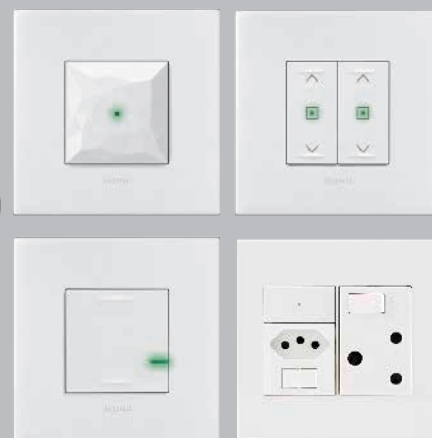

The LEDs now light up in green, showing that your network has been created.

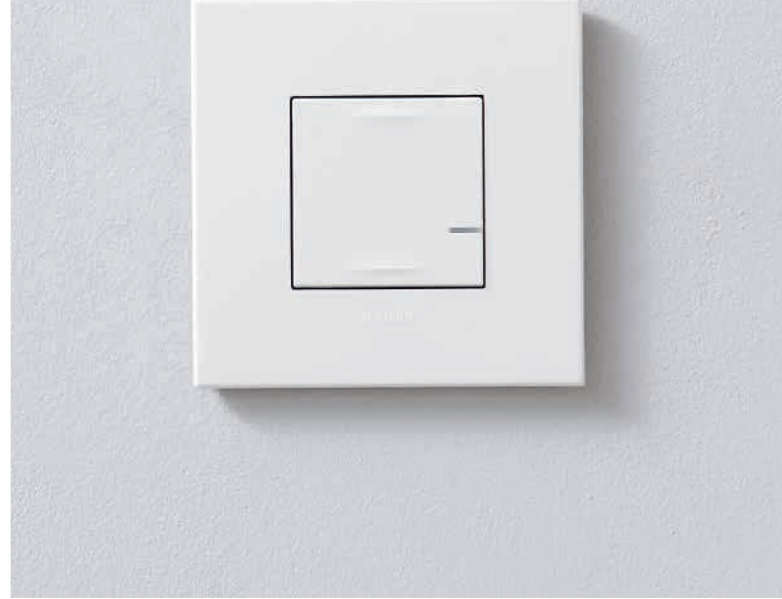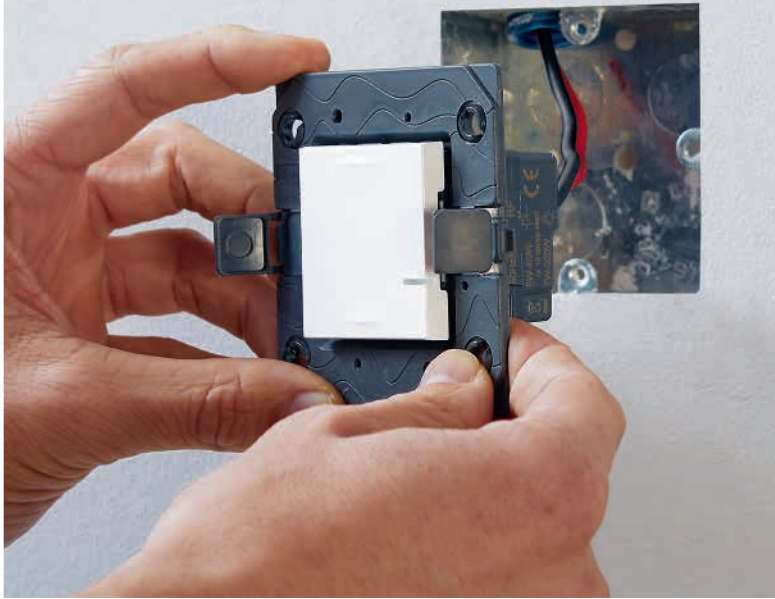

Arteor with Netatmo is a radio solution, requiring no extra wiring as it uses the existing infrastructure. This makes it the ideal choice for upgrading an existing installation into a connected home. But for new building projects, too, it offers definite advantages, as its simple installation cuts effort to a minimum.

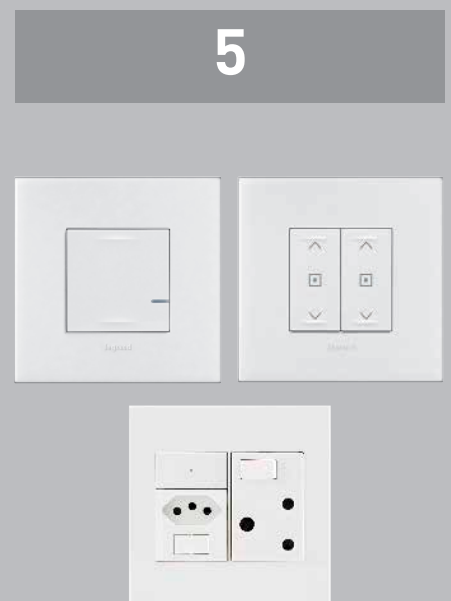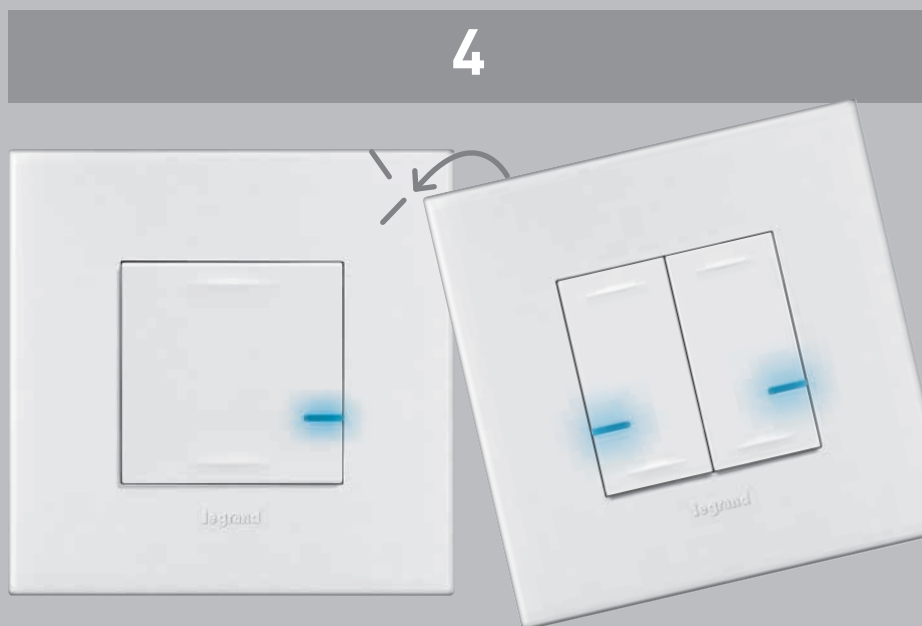

To pair them, press on the wireless switch you wish to pair, while tapping it three times onto the wired devices you wish to control. The LED's blue light tells you that the pairing was successful.

After a short press on the master switch, all LEDs turn off.

INNOVATIVE OPERATING CONCEPTS

TALK - SWIPE - TOUCH

VOICE CONTROL

As modern home technology becomes increasingly complex, it also gets to be easier to operate. Thus, for instance, Arteor with Netatmo makes it possible to control functions via voice commands. Used in combination with the Google Assistant, Amazon Alexa or Apple Siri, the system obeys the spoken word. Lighting in the home, for example, can be switched on or off with a simple word.




THE HOME + CONTROL APP FOR SMARTPHONE OR TABLET

The app on the smartphone or tablet opens up new options: monitoring of instantaneous power consumption, remote surveillance of the connected home, and control over various functions when the user is out and about.



 works with the
Google Assistant

 WORKS WITH
alexa

 Works with
Apple HomeKit



AND OBVIOUSLY LOCAL CONTROL


Of course, all functions can still be used in the traditional way via switches on the wall. If furniture needs to be rearranged or small children need to be able to reach a switch, the wireless switches can be repositioned easily at any time.

 Download on the
App Store

 GET IT ON
Google Play

HOME + CONTROL App

iPhone, iPod and iPad are registered trademarks of Apple Inc., registered in the US and other countries. HomeKit is a trademark of Apple Inc. App Store is a service mark of Apple Inc. Google, Android, Google Play, and the Google Play logo are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

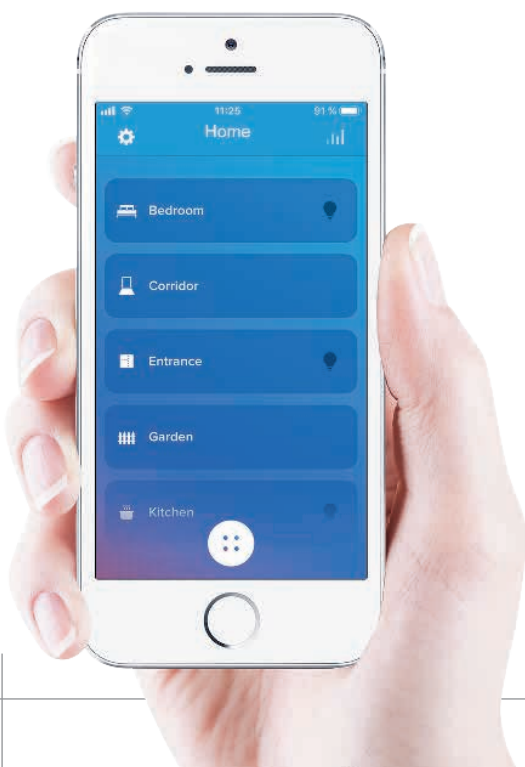

The Home + Control App changes everything not only in terms of control of the smart home but also in terms of its configuration. The installer can use the app to conveniently configure the entire system, based on the individual specifications of their customer: the function assigned to each of the components, the way they interact, the scenarios users are able to trigger - all of this can be determined using the highly intuitive app. Moreover, much of this can be input in advance, once the user's wishes have been clarified at the consultation stage. This makes life easier for installers, improves their efficiency and ensures their work is more highly valued.




HOME + CONTROL App


SMART HOME VIA SMARTPHONE

THE HOME + CONTROL APP


The app used by the installer for configuration purposes is also used to control the entire system. The remote control options it provides are particularly useful. The app displays alarm messages if, for instance, the refrigerator is no longer powered or a light remains on when noone is supposed to be at home. This means the user can react accordingly and act from a distance to prevent any greater damage.

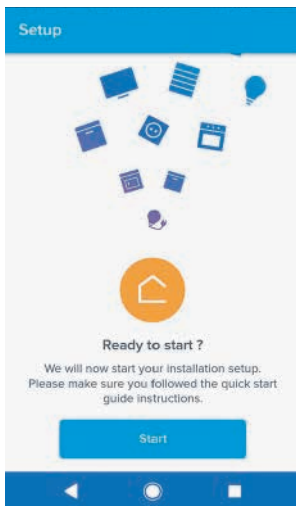


Configuration is based on a set of simple steps.

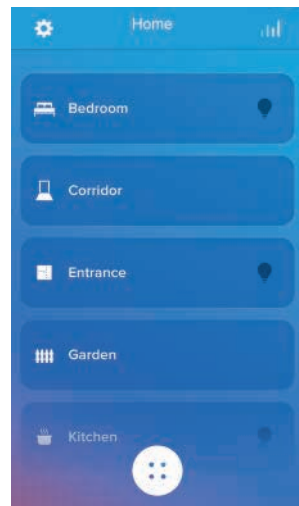


Each room is configured individually.

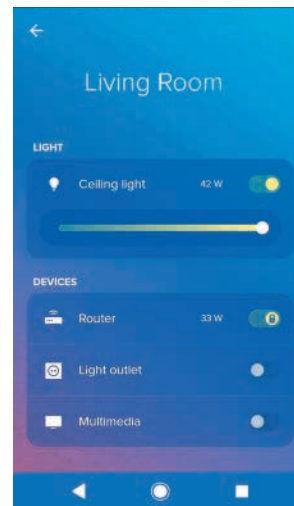


All functions can be set individually.

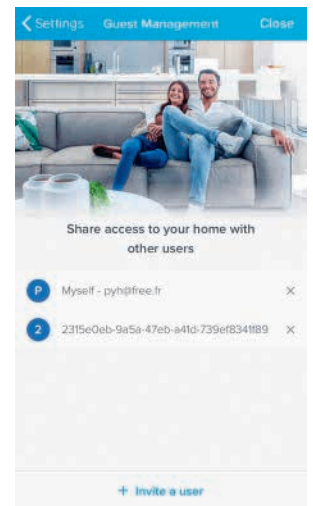


Invite each member of your family.

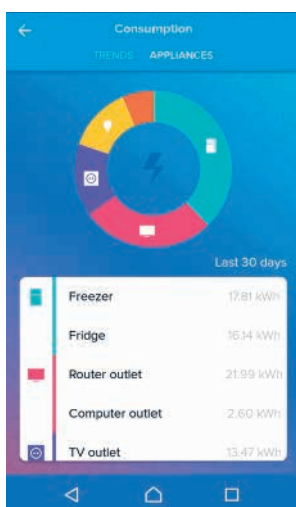


Energy consumption can be queried for individual devices.

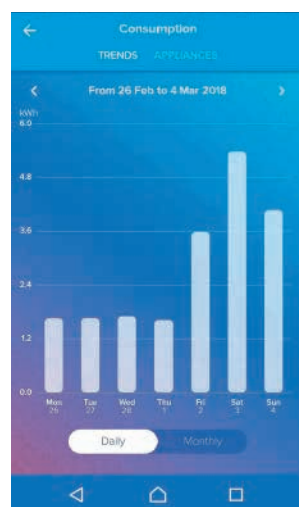

Detailed consumption analyses help save energy.

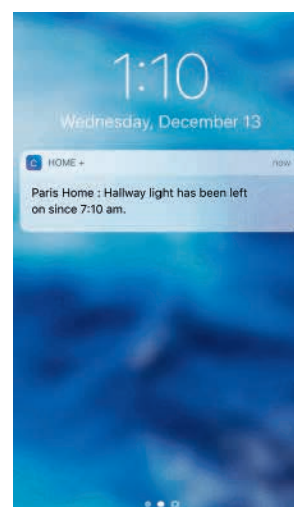

Alarm messages reach the user wherever they may be.

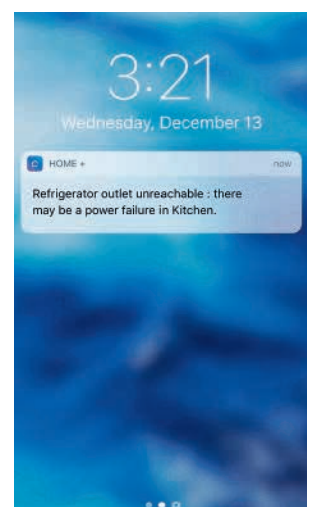

Enables fast responses to faults.

Connected home

connected gateway pack

Must be ordered for any connected installation

Connected home

connected light switches

Step 1: Gateway pack for a connected home



5 742 09

Used to create the radio network and the Wi-Fi connection of the connected installation
Enables remote control of your home (lighting, roller blinds and electrical appliances) using a smartphone via the Home + Control App and/or voice control with a voice assistant
Must be ordered to start any connected installation
To be completed by adding individual connected products
2.4 GHz Wi-Fi connection required

Pack	Cat.Nos	Connected gateway pack Arteor with Netatmo
1	5 742 09	<p>Used to create the radio network and the Wi-Fi connection Composition: - 1 flush-mounted ZigBee/Wi-Fi gateway Mechanisms supplied with cover plates, to be equipped with support frames and plates (p. 32 - 33) Allows the connection of the installation to the Wi-Fi network and enables control through the Home + Control App and voice assistants (Google Assistant, Amazon Alexa, Apple Siri)* Enables Home + Control service on IFTTT Can be installed in place of an existing product Suitable for flush-mounting box min. depth 35mm</p> <p>- 1 Home/Away wireless master switch with preset life scenes Supplied with cover plate and support frame To be equipped with plates (p. 32 - 33) Used to create the radio network and to control life scenes Life scenes can be customised in the Home + Control App Supplied with CR2032 3 V long-life battery for power supply and 4 removable stickers for fixing the control unit on any substrate LED function for low battery indication</p> <p>○ White ● Magnesium ● Champagne ● Soft Alu</p>
1	5 742 27	
1	5 742 36	
1	5 742 18	

* Availability of voice assistants to be checked in your country

Step 2: Connected products



5 742 01



5 742 12



5 742 43

Used to create your connected installation, require prior installation of a gateway pack for connected installation

Pack	Cat.Nos	Connected light switches Arteor with Netatmo
1	5 742 01	<p>Switch with neutral 250 W, wired, 1 module Mechanisms supplied with cover plates, to be equipped with support frames and plates (p. 32 - 33) For local or remote control of lighting Can be controlled by one or more wireless light switches or mechanical 2-way switches Compatible with all loads Can be installed in place of an existing switch in a flush-mounting box 35 mm deep Locator and indicator LED function</p> <p>○ White ● Magnesium ● Champagne ● Soft Alu</p>
1	5 742 20	
1	5 742 29	
1	5 742 11	
1	5 742 02	<p>Switch without neutral, 5 - 300 W, with dimmer option, wired, 2 modules Mechanisms supplied with cover plates, to be equipped with support frames and plates (p. 32 - 33) For local or remote control of lighting Can be controlled by one or more wireless light switches Compatible with all loads (dimmable LEDs strongly recommended) Supplied with a bleeder Dimmer mode can be activated from the Home + Control App. Can be installed in place of an existing switch in a flush-mounting box 35 mm deep Locator and indicator LED function</p> <p>○ White ● Magnesium ● Champagne ● Soft Alu</p>
1	5 742 21	
1	5 742 30	
1	5 742 12	
1	5 742 43	<p>Micromodule switch with neutral, 300 W</p> <p>Used to connect lights with a ceiling box installation Can be controlled by one or more wireless light switches or mechanical push-buttons Paired by tapping the wireless control on the micromodule</p>
1	0 676 96	<p>Dry contact</p> <p>For control of 1 circuit 2500 W connected to its terminals according to 3 different operation modes: time-lag switch, switch, remote control switch Its receiver function is used to execute, on its circuits, on/off commands received from wireless switches or remote controls Delivered with one Plexo IP55 box for outdoor use Compatible for indoor and outdoor use</p>

Connected home

connected outlets

Step 2: Connected products



5 742 00



5 742 00 + 5 721 32 + 5 721 37 + 5 753 00



4 120 15

Used to complete your connected installation, require prior installation of a gateway pack for connected installation

Connected socket outlet module Arteor with Netatmo - 16A - 230V~ - 3680 W, 1 module

Pack	Cat.Nos	
1	5 742 00	<p>Mechanisms supplied with cover plates, to be equipped with support frames and plates (p. 32 - 33)</p> <p>Allows to create a connected socket outlet for integration into the connected installation</p> <p>To be wired to a traditional socket outlet</p> <p>The connected socket outlet can be paired with one or more wireless light switches</p> <p>Connected socket outlets allow to</p> <ul style="list-style-type: none"> - remotely control electrical appliances - measure instantaneous power - monitor daily and monthly consumption - send notifications in case of abnormal use (overconsumption etc.) <p>Can be installed in place of an existing socket outlet in a flush-mounting box 40 mm min. depth</p> <p>Indicator LED function</p> <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 742 28	
1	5 742 37	
1	5 742 19	

Energy module for rail mounting

1	4 120 15	<p>Measures the instantaneous and cumulative global electrical consumption of a single phase installation (63A maxi)</p> <p>Sends a notification in case of reaching a configurable limit in the Home + Control App.</p> <p>Delivered with 1 coil</p> <p>1 module</p>
---	----------	---

Connected home

connected curtain/roller blind switches

Step 2: Connected products



5 742 04

Used to complete your connected installation, require prior installation of a gateway pack for connected installation

Connected curtain/roller blind switch Arteor with Netatmo

Pack	Cat.Nos	
1	5 742 04	<p>Mechanisms supplied with cover plates, to be equipped with support frames and plates (p. 32 - 33)</p> <p>For local and remote control of a 230 V~ roller blind (raise/lower/stop functions and level management)</p> <p>Compatible with roller blinds with mechanical or electronic stop, not compatible with radio-controlled roller blinds</p> <p>Can be paired with one or more roller blind wireless switches</p> <p>Can be installed in place of an existing roller blind switch in a flush-mounting box 35 mm deep</p> <p>1 module - with neutral</p> <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 742 22	
1	5 742 31	
1	5 742 13	

Connected curtain/roller blind micromodule

1	0 676 97	<p>For local and remote control of a 230 V~ roller blind (raise/lower/stop functions and level management)</p> <p>Compatible with roller blinds with mechanical or electronic stop, not compatible with radio-controlled roller blinds</p> <p>Can be paired with one or more roller blind wireless switches</p> <p>To be installed in the ceiling box or roller blind box to connect a new or existing roller blind</p>
---	----------	---

Connected home

connected wireless controls

Step 2: Connected products



5 742 05




5 742 47





5 742 52

Used to complete your connected installation. Require a prior connected installation including a gateway pack

Pack	Cat.Nos	Wireless light switch - 1-gang Arteor with Netatmo
1	5 742 05	<p>Supplied with cover plate and support frame To be equipped with plates (p. 32 - 33) Used to add an extra lighting control Easy pairing by tapping the wired product Controls up to 20 wired products: switches, micromodules, socket outlets Supplied with CR2032 3 V long-life battery for power supply and 4 removable stickers for fixing the control unit on any substrate. LED function for low battery indication</p>  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 742 23	
1	5 742 32	
1	5 742 14	

Pack	Cat.Nos	Wireless light switches - 2-gang
1	5 742 44	<p>Supplied with cover plate and support frame To be equipped with plates (p. 32 - 33) Used to add an extra lighting control Easy pairing by tapping the wired product Controls up to 2 x 20 wired products: switches, micromodules, socket outlets Supplied with CR2032 3 V long-life battery for power supply and 4 removable stickers for fixing the control unit on any substrate LED function for low battery indication</p>  <ul style="list-style-type: none"> ○ White ● Magnesium ● Champagne ● Soft Alu
1	5 742 46	
1	5 742 47	
1	5 742 45	

Pack	Cat.Nos	Wireless motion sensor
1	5 742 52	 <p>Allows to control up to 20 wired switches, micromodules and socket outlets Easy pairing by tapping the wired products Supplied with 2 x AA battery For indoor and outdoor use Recommended distance between 2 sensors: 6 m Recommended installation height: 2.5 m Time delay adjustable from 1 to 30 min Range: 8 m Detection angle: 140° Sensor range adjustable from 2 m to 8 m Light level threshold adjustable from 1 to 1000 lux</p>

Pack	Cat.Nos	Wireless switch on/off module
1	0 676 94	 <p>Allows to transform a mechanical 2-way switch into a wireless on/off switch. Small size for easy integration into the wall box To be paired with one connected switch, micro-module, socket outlet Supplied with CR2032 3V long-life battery for power supply</p>

Connected home

connected wireless scene switches

Step 2: Connected products



5 742 15



5 742 08




0 676 95




5 742 25

Pack	Cat.Nos	Home/Away wireless master switch Arteor with Netatmo
		Supplied with cover plate and support frame To be equipped with plates (p. 32 - 33) Used to add an extra Home/Away wireless master switch Works in the same way as the Home/Away wireless master switch included in the gateway pack Home/Away life scenes can be customised in the Home + Control App. Supplied with CR2032 3 V long-life battery for power supply and 4 removable stickers for fixing the control unit on any substrate LED function for low battery indication
1	5 742 06	○ White
1	5 742 24	● Magnesium
1	5 742 33	● Champagne
1	5 742 15	● Soft Alu



Pack	Cat.Nos	Wake up/Sleep wireless switch Arteor with Netatmo
		Supplied with cover plate and support frame To be equipped with plates (p. 32 - 33) Used to add 2 extra scenes to a connected installation Preset Wake up/Sleep life scenes which can be customised in the Home + Control App. Supplied with CR2032 3 V long-life battery for power supply and 4 removable stickers for fixing the control unit on any substrate LED function for low battery indication
1	5 742 08	○ White
1	5 742 26	● Magnesium
1	5 742 35	● Champagne
1	5 742 17	● Soft Alu



Pack	Cat.Nos	Pocket remote control
1	0 676 95	Allows lighting and roller blinds control Can be attached to a keyring Supplied with CR2032 3V long-life battery for power supply ● Graphite




NETTRAIN1



NETATMO1

Pack	Cat.Nos	Curtain/roller blind wireless switch Arteor with Netatmo
1	0 676 95	Supplied with cover plate and support frame To be equipped with plates (p. 32 - 33) Used for remote control or centralization of up to 20 wired roller blind switches Pair by tapping on the selected roller blind switch(es) Supplied with CR2032 3 V long-life battery for power supply and 4 removable stickers for fixing the control unit on any substrate LED function for low battery indication 2 modules
1	5 742 07	○ White
1	5 742 25	● Magnesium
1	5 742 34	● Champagne
1	5 742 16	● Soft Alu















Pack	Cat.Nos	Accessory
1	0 648 71	Pack of 3 x 4 extra removable stickers for fixing a wireless control

Pack	Cat.Nos	Training Kit and Retail Starter Kits
		Training Kit Includes Technical Case with plug, Gateway Pack, Connected Light Switch, Wireless Switch, support frames and cover plates.
1	NETTRAIN1	Retail Starter Kit Includes Gateway Pack, Connected Light Switch, Wireless Switch, Connected Socket, support frames and cover plates.
1	NETATMO1	○ White
1	NETATMO2	● Magnesium
1	NETATMO3	● Soft Alu
1	NETATMO4	● Champagne

Arteor™ South African standard plate selection charts

83.5 mm fixing centres - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Neutral					
				White	Soft Alu	Graphite	Magnesium	Champagne	Dark Bronze
SQUARE VERSION									
1 vertical module	2" x 4"	5 760 30		5 767 20	5 714 85	5 767 22	5 714 95	5 715 05	5 715 15
1 horizontal module		5 760 40		5 752 40	5 714 81	5 752 42	5 714 91	5 715 01	5 715 11
2 modules		5 760 30 ⁽¹⁾ 5 760 40		5 752 50	5 714 82	5 752 52	5 714 92	5 715 02	5 715 12
3 modules		5 760 40		5 752 70	5 714 83	5 752 72	5 714 93	5 715 03	5 715 13
2 modules	4" x 4"	5 760 31		5 752 60	5 714 86	5 752 62	5 714 96	5 715 06	5 715 16
3 modules		5 760 31		5 752 80	5 714 87	5 752 82	5 714 97	5 715 07	5 715 17
4 modules		5 760 31		5 752 90	5 714 84	5 752 92	5 714 94	5 715 04	5 715 14
2 x 3 modules		5 760 32		5 753 00	5 714 88	5 753 02	5 714 98	5 715 08	5 715 18
Blanking cover plate	2" x 4"	5 760 40		5 754 10	5 714 10	5 754 12	5 714 52	5 714 53	5 714 51
Blanking cover plate	4" x 4"	5 760 31		5 753 60	5 714 00	5 753 62	-	-	-
6 modules	6 890 27 SP	Supplied with support frame		5 753 70	5 713 06	5 753 72	5 713 16	5 713 26	5 713 36
8 modules	6 890 27 SP	Supplied with support frame		5 767 00	5 713 08	5 767 02	5 713 18	5 713 28	5 713 38

PLATES


Mirror		Brushed metal			Reflective			Wood	Signature	
Mirror White	Mirror Black	Stainless Steel	Gold Brass	Pink Champagne	Black	Stainless Steel	Black	Gold	Grey Oak	Cube
5 767 24	5 767 23	5 767 26	5 767 30	5 715 26	5 715 21	5 715 31	5 715 41	5 715 36	5 715 46	5 715 51
5 752 44	5 752 43	5 752 46	5 764 10	5 714 26	5 714 16	5 714 36	5 714 56	5 714 46	5 714 66	5 714 76
5 752 54	5 752 53	5 752 56	5 764 30	5 714 27	5 714 17	5 714 37	5 714 57	5 714 47	5 714 67	5 714 77
5 752 74	5 752 73	5 752 76	5 764 50	5 714 28	5 714 18	5 714 38	5 714 58	5 714 48	5 714 68	5 714 78
5 752 64	5 752 63	5 752 66	5 766 20	5 715 27	5 715 22	5 715 32	5 715 42	5 715 37	5 715 47	5 715 52
5 752 84	5 752 83	5 752 86	5 766 40	5 715 28	5 715 23	5 715 33	5 715 43	5 715 38	5 715 48	5 715 53
5 752 94	5 752 93	5 752 96	5 766 50	5 715 29	5 715 24	5 715 34	5 715 44	5 715 39	-	-
5 753 04	5 753 03	5 753 06	5 766 70	5 715 30	5 715 25	5 715 35	5 715 45	5 715 40	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
5 753 74	5 753 73	5 753 76	5 763 70	5 713 56	5 713 46	5 713 66	5 713 86	5 713 76	5 713 96	5 714 06
5 767 04	5 767 03	5 767 06	5 767 10	5 713 58	5 713 48	5 713 68	5 713 88	5 713 78	5 713 98	5 714 08

A R T E O R™ WITH NETATMO

TALK - SWIPE - TOUCH



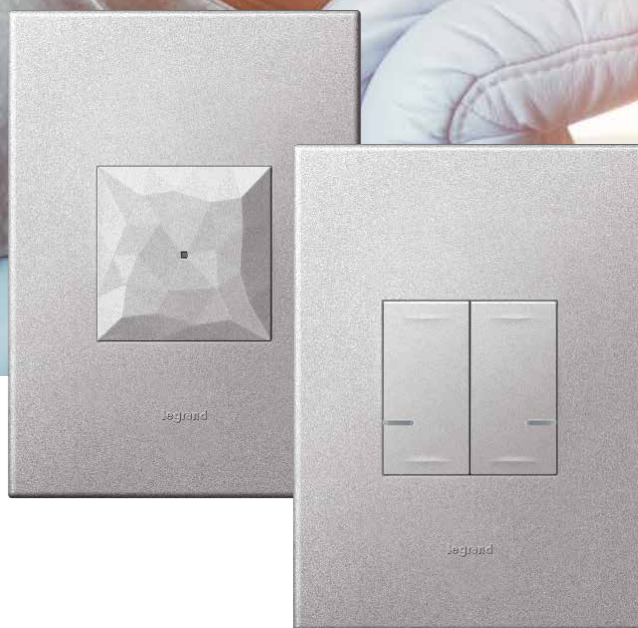

HOW DO I BECOME AN ACCREDITED NETATMO INSTALLER?

1. Qualified electricians can attend a Legrand accredited training session.
2. Participation in a training session requires the compulsory purchase of a Netatmo Training Case.
3. Cost of the training is included in the purchase of the case.
4. In the event of you failing the training, the case is still yours to keep. You can re-apply to do the training using the same case again.
5. Only Legrand hosts accredited training sessions.
6. During the training you will be required to wire up and connect the components of the case.
7. Minimum requirements to bring with you for the training: Smart Phone, Wi-Fi Dongle (with data), E-Mail access and tools (flat screwdriver, wire stripper and side cutter).
8. If you pass the training, you will be issued with a certificate from Legrand accrediting you as a Netatmo Installer. The certificate number will correspond with the unique number found on the gateway included in the case that you purchased.
9. Be sure to complete both the training register and the Netatmo Accredited Installer document during the training. This is for record keeping purposes to note your accreditation and permission to list your installation services on the legrand.co.za website.
10. The training case purchased to participate in the training is strictly for training and demonstration purposes. If this product is later sold to a third party, it will then be considered second hand. As such it will no longer carry the Legrand warranty.
11. It is compulsory for Netatmo distributors to purchase training cases for their reps.





FOLLOW US ON

-  www.facebook.com/legrand.za
-  [@legrandsa](https://twitter.com/legrandsa)
-  www.linkedin.com/in/legrandsa
-  <https://za.pinterest.com/legrandsa>
-  [@legrand_south_africa](https://www.instagram.com/legrand_south_africa)



Legrand S.A

21 Spartan Crescent,
Eastgate, Ext 3
Sandton, 2054

Tel: +27 11 444 7971

Fax: +27 11 444 7980

Email: legrand.south.africa@legrand.co.za

www.legrand.co.za